

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333701-940

Luminaire Tested: **S125RDIW-S1090D470U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333701-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1090D470U940-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5248.8 lumens
Efficiency: N/A
Efficacy: 113.6 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 46.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

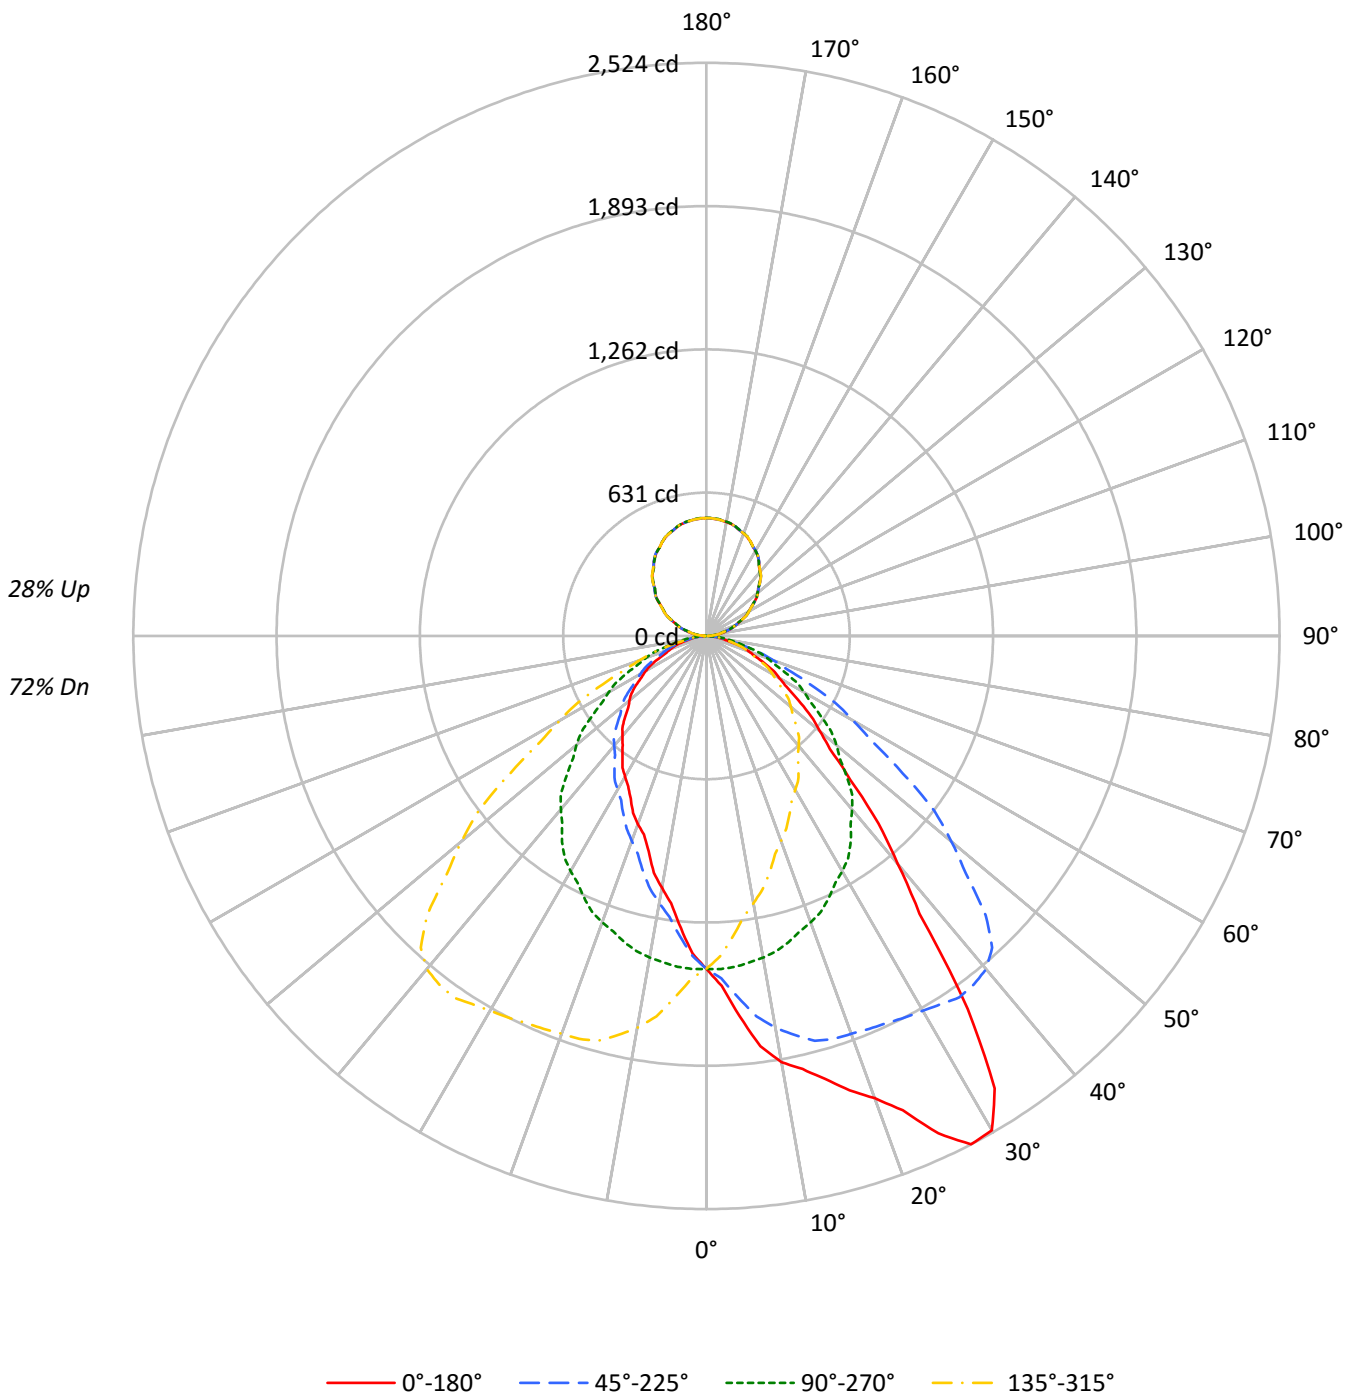



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	77	77	77	77	77	77	72		
1	103	99	95	92	98	94	91	88	85	83	80	77	75	73	69	67	66	66	66	66	66	66	66	62		
2	95	87	81	76	90	83	78	73	75	71	67	68	65	62	61	59	57	57	57	57	57	57	57	53		
3	87	77	70	64	82	74	67	62	67	62	57	61	56	53	55	52	49	49	49	49	49	49	49	46		
4	80	69	61	55	75	66	59	53	60	54	49	54	50	46	49	45	42	42	42	42	42	42	42	39		
5	73	62	53	47	69	59	51	46	54	48	43	49	44	40	45	40	37	37	37	37	37	37	37	35		
6	68	56	47	41	64	53	46	40	49	42	38	44	39	35	41	36	33	33	33	33	33	33	33	30		
7	63	50	42	37	60	48	41	36	44	38	33	41	35	31	37	33	29	29	29	29	29	29	29	27		
8	58	46	38	33	55	44	37	32	41	34	30	37	32	28	34	30	26	26	26	26	26	26	26	24		
9	55	42	34	29	52	40	33	28	37	31	27	34	29	25	32	27	24	24	24	24	24	24	24	22		
10	51	39	31	26	49	37	30	26	34	29	24	32	27	23	29	25	22	22	22	22	22	22	22	20		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9469	9469	9469	9469
5°	10893	9481	8373	9481
10°	12496	9433	7389	9433
15°	13497	9336	6567	9336
20°	14882	9224	6064	9224
25°	17224	9075	5627	9075
30°	18744	8918	5341	8918
35°	15811	8736	5077	8736
40°	11042	8408	4850	8408
45°	8191	7965	4629	7965
50°	6531	7504	4439	7504
55°	5543	6933	4270	6933
60°	4790	6421	3995	6421
65°	4268	5868	3440	5868
70°	3750	5374	3136	5374
75°	3244	4654	2944	4654
80°	2462	3916	2462	3916
85°	2045	3083	2319	3083



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.6	2.7
10°-20°	412.0	7.8
20°-30°	653.3	12.4
30°-40°	787.8	15.0
40°-50°	703.5	13.4
50°-60°	539.5	10.3
60°-70°	350.6	6.7
70°-80°	170.5	3.2
80°-90°	41.8	0.8
90°-100°	34.8	0.7
100°-110°	102.7	2.0
110°-120°	174.0	3.3
120°-130°	229.0	4.4
130°-140°	256.6	4.9
140°-150°	251.5	4.8
150°-160°	211.2	4.0
160°-170°	140.4	2.7
170°-180°	49.1	0.9
0°-30°	1205.9	23.0
0°-40°	1993.7	38.0
0°-60°	3236.7	61.7
0°-90°	3799.6	72.4
90°-120°	311.5	5.9
90°-150°	1048.5	20.0
90°-180°	1449.0	27.6
0°-180°	5248.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1466	1466	1466	1466	1466	
5°	1680	1462	1292	1462	1680	168
15°	2019	1396	982	1396	2019	578
25°	2417	1274	790	1274	2417	1110
35°	2005	1108	644	1108	2005	1211
45°	897	872	507	872	897	716
55°	492	616	379	616	492	447
65°	279	384	225	384	279	278
75°	130	186	118	186	130	138
85°	28	42	31	42	28	32
90°	10	0	10	0	10	7
95°	35	26	35	26	35	35
105°	100	92	100	92	100	106
115°	176	174	176	174	176	174
125°	256	254	256	254	256	228
135°	332	331	332	331	332	256
145°	402	401	402	401	402	251
155°	458	458	458	458	458	211
165°	497	498	497	498	497	140
175°	516	518	516	518	516	49
180°	519	519	519	519	519	



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1542.2	1541.2	1543.2	1537.8	1538.4	1530.2	1530.2	1523.9	1515.7	1509.5	1506.5
5°	1680.3	1681.6	1679.2	1670.2	1664.1	1655.1	1644.8	1626.8	1611.8	1597.3	1585.9
7.5°	1822.7	1823.5	1815.5	1812.8	1797.6	1786.5	1763.8	1739.2	1717.4	1689.8	1668.6
10°	1905.5	1904.9	1896.4	1889.8	1876.6	1859.8	1837.5	1808.6	1781.5	1751.4	1722.5
12.5°	1953.6	1952.0	1949.4	1941.3	1929.0	1914.1	1895.2	1866.8	1833.4	1800.5	1766.8
15°	2018.7	2014.4	2006.6	1996.4	1978.9	1961.4	1940.4	1915.1	1883.2	1845.8	1814.6
17.5°	2099.0	2099.2	2087.1	2072.9	2049.2	2018.4	1985.8	1945.1	1901.8	1860.7	1827.4
20°	2165.4	2163.6	2151.6	2124.0	2096.9	2058.3	2021.1	1971.0	1918.1	1864.6	1823.0
22.5°	2260.8	2256.1	2243.5	2207.3	2165.3	2115.7	2058.6	1997.5	1933.5	1872.7	1818.2
25°	2417.1	2413.4	2388.7	2346.6	2287.7	2211.2	2136.5	2052.9	1960.9	1880.8	1814.6
27.5°	2523.9	2520.0	2501.7	2466.7	2412.3	2331.8	2230.8	2119.0	2004.0	1893.9	1798.5
30°	2513.4	2522.4	2520.0	2503.7	2462.8	2390.6	2297.3	2171.5	2034.9	1905.5	1791.7
32.5°	2362.1	2370.3	2391.4	2423.3	2425.7	2396.8	2327.1	2211.0	2069.6	1922.4	1786.5
35°	2005.4	2016.2	2057.2	2121.6	2205.8	2276.2	2290.6	2228.0	2101.0	1942.8	1778.5
37.5°	1541.7	1600.9	1635.4	1703.2	1830.5	1960.0	2084.6	2130.5	2076.3	1934.4	1765.6
40°	1309.7	1324.1	1385.5	1461.9	1569.1	1703.9	1881.4	2009.6	2013.8	1915.1	1745.3
42.5°	1120.9	1139.2	1181.3	1242.3	1334.1	1468.9	1652.3	1821.3	1899.7	1862.2	1718.9
45°	896.8	910.6	941.3	988.3	1058.6	1170.0	1327.7	1523.3	1678.6	1739.4	1647.9
47.5°	736.6	744.1	770.9	806.6	858.7	939.9	1061.9	1231.7	1418.0	1548.5	1535.7
50°	650.0	658.4	678.9	706.0	749.9	818.5	916.1	1057.5	1249.5	1408.9	1440.8
52.5°	582.6	589.6	602.4	627.9	664.2	716.9	795.7	923.6	1096.4	1266.0	1339.7
55°	492.3	497.1	507.4	521.8	550.7	588.6	656.7	745.1	884.8	1055.6	1164.0
57.5°	417.9	420.4	426.9	440.2	460.2	487.9	537.0	612.0	712.1	866.0	985.6
60°	370.8	373.2	381.6	390.6	406.3	431.5	470.0	522.4	618.7	745.7	866.7
62.5°	333.1	334.7	338.2	347.2	361.0	380.5	410.8	453.5	530.1	641.7	755.9
65°	279.3	279.8	281.1	288.3	296.7	311.1	331.0	361.1	418.9	503.2	604.2
67.5°	227.5	228.4	232.6	235.1	243.9	251.5	263.1	286.1	326.8	383.6	462.3
70°	198.6	198.0	202.2	205.3	208.2	217.3	225.1	243.8	269.0	312.4	378.0
72.5°	171.7	170.0	171.9	173.0	176.9	183.1	190.9	202.3	221.9	251.7	301.9
75°	130.0	130.6	130.6	131.8	134.8	137.2	139.6	145.6	156.5	176.4	203.4
77.5°	91.2	90.2	92.8	93.2	95.0	97.6	99.7	102.1	106.6	114.7	128.7
80°	66.2	66.2	66.8	68.6	68.0	69.2	72.2	74.6	80.1	84.9	89.7
82.5°	50.8	50.3	50.9	51.3	51.2	52.3	53.4	53.9	56.0	58.4	61.7
85°	27.6	27.6	28.3	28.3	28.9	28.9	29.5	29.5	29.5	30.1	30.7
87.5°	12.6	12.0	11.5	11.4	11.9	12.8	12.1	11.6	11.5	11.4	11.8
90°	9.7	9.5	9.2	8.9	8.6	8.3	7.8	7.4	7.0	6.5	5.8
92.5°	19.1	18.9	18.6	18.5	18.3	17.9	17.3	16.7	16.1	15.5	14.7
95°	34.8	34.6	34.4	34.2	34.1	33.6	33.0	32.4	31.7	31.1	30.2
97.5°	52.7	52.6	52.5	52.3	52.3	51.9	51.4	50.7	50.1	49.6	48.3
100°	66.3	66.1	65.9	65.7	65.5	65.1	64.3	63.5	62.7	61.8	60.6
102.5°	79.9	79.6	79.4	79.1	78.8	78.3	77.4	76.5	75.6	74.7	74.2
105°	100.2	100.0	99.7	99.4	99.2	98.7	98.2	97.6	97.1	96.6	96.0
107.5°	121.1	121.1	121.1	121.2	121.2	121.0	120.7	120.5	120.2	119.9	119.6
110°	136.6	136.7	136.8	136.9	137.0	136.9	136.6	136.3	136.1	135.8	135.5



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	151.8	151.9	152.1	152.3	152.5	152.5	152.3	152.2	152.1	151.9	151.6
115°	175.8	175.9	176.0	176.1	176.2	176.3	176.4	176.5	176.6	176.6	176.5
117.5°	199.2	199.6	200.0	200.4	200.7	200.8	200.7	200.7	200.6	200.5	200.4
120°	215.4	215.8	216.2	216.5	216.9	217.0	217.0	217.0	217.0	217.0	217.0
122.5°	231.6	231.8	232.2	232.5	232.7	232.9	233.0	233.1	233.1	233.2	233.0
125°	255.8	255.9	256.0	256.1	256.2	256.4	256.5	256.7	256.9	257.1	257.0
127.5°	279.1	279.3	279.5	279.6	279.8	280.0	280.1	280.2	280.3	280.4	280.2
130°	294.6	294.8	295.0	295.2	295.3	295.5	295.6	295.7	295.8	295.9	295.7
132.5°	309.2	309.4	309.7	310.0	310.2	310.3	310.4	310.5	310.6	310.7	310.8
135°	331.8	332.2	332.5	332.9	333.2	333.4	333.4	333.4	333.4	333.4	333.3
137.5°	353.9	354.4	354.9	355.3	355.8	356.0	355.8	355.7	355.6	355.5	355.3
140°	368.2	368.6	369.1	369.5	370.0	370.1	370.0	369.8	369.6	369.4	369.2
142.5°	381.7	382.2	382.6	383.1	383.5	383.7	383.6	383.5	383.4	383.3	383.0
145°	402.2	402.4	402.7	403.0	403.2	403.3	403.3	403.3	403.3	403.3	403.1
147.5°	419.5	420.1	420.7	421.3	422.0	422.1	422.0	421.7	421.5	421.3	421.1
150°	432.5	432.7	432.8	433.0	433.2	433.3	433.3	433.3	433.3	433.3	432.9
152.5°	443.1	443.4	443.8	444.1	444.4	444.4	444.3	444.1	443.8	443.6	443.4
155°	458.3	458.8	459.2	459.7	460.1	460.1	459.8	459.4	459.1	458.7	458.6
157.5°	471.0	471.6	472.2	472.8	473.4	473.5	473.1	472.8	472.4	472.1	472.0
160°	479.7	480.2	480.6	481.1	481.5	481.6	481.3	480.9	480.5	480.1	480.0
162.5°	487.1	487.7	488.2	488.7	489.3	489.3	488.8	488.5	488.0	487.6	487.6
165°	497.1	497.7	498.2	498.7	499.3	499.4	499.0	498.6	498.3	497.9	497.8
167.5°	505.1	505.6	506.1	506.7	507.3	507.3	506.8	506.2	505.7	505.2	505.2
170°	509.3	509.9	510.5	511.1	511.8	511.8	511.2	510.7	510.1	509.6	509.6
172.5°	512.8	513.4	513.9	514.4	515.1	515.1	514.5	514.0	513.4	512.9	512.9
175°	516.1	516.7	517.4	518.0	518.6	518.7	518.2	517.5	517.0	516.5	516.5
177.5°	518.1	518.5	519.1	519.6	520.0	520.1	519.7	519.2	518.8	518.4	518.4
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1506.5	1503.2	1496.9	1491.1	1483.9	1477.7	1473.4	1468.0	1461.3	1453.1	1446.4
5°	1573.2	1560.0	1542.6	1527.5	1508.2	1493.2	1477.6	1462.5	1447.4	1428.2	1411.3
7.5°	1647.2	1619.8	1593.2	1559.8	1529.5	1502.4	1476.3	1450.0	1424.2	1396.9	1370.6
10°	1692.4	1659.3	1622.6	1580.5	1541.9	1505.2	1471.5	1438.4	1403.6	1372.8	1339.7
12.5°	1734.8	1692.0	1650.0	1596.9	1550.6	1505.7	1462.9	1421.6	1384.3	1344.4	1308.9
15°	1773.1	1730.9	1684.0	1619.0	1554.6	1500.4	1449.8	1396.3	1350.0	1305.4	1265.7
17.5°	1787.9	1743.7	1689.2	1626.7	1556.3	1488.2	1423.0	1364.3	1309.7	1257.8	1213.2
20°	1782.1	1739.4	1683.4	1623.8	1548.5	1477.6	1407.1	1342.1	1281.4	1226.5	1179.0
22.5°	1768.1	1723.9	1669.9	1607.0	1535.5	1460.2	1385.0	1315.6	1252.0	1195.2	1143.4
25°	1747.2	1687.0	1631.7	1570.2	1502.3	1427.6	1350.0	1273.5	1205.5	1147.7	1091.2
27.5°	1725.4	1650.3	1579.8	1518.9	1447.0	1380.4	1305.6	1227.2	1155.7	1096.8	1038.8
30°	1705.7	1621.4	1543.7	1474.5	1406.5	1343.4	1272.3	1195.9	1122.5	1061.7	1002.7
32.5°	1681.1	1591.5	1506.2	1426.4	1360.8	1298.1	1233.8	1160.7	1089.2	1026.5	966.6
35°	1650.3	1536.0	1443.2	1358.3	1285.6	1224.8	1167.0	1108.0	1036.4	971.4	913.0
37.5°	1609.8	1480.1	1372.8	1280.4	1203.5	1142.5	1096.9	1043.0	977.7	915.4	861.2
40°	1585.3	1439.7	1322.2	1230.8	1150.1	1085.7	1043.0	997.3	937.7	879.3	825.1
42.5°	1552.6	1402.6	1271.2	1175.9	1094.8	1032.8	989.5	949.6	899.6	844.6	786.6
45°	1488.4	1330.7	1192.8	1090.6	1008.7	947.9	907.6	872.1	834.2	783.6	733.1
47.5°	1404.8	1255.7	1111.5	999.8	919.6	863.2	824.0	796.0	768.9	725.9	676.8
50°	1337.9	1194.1	1053.2	944.9	859.4	805.8	769.2	746.9	722.2	683.1	642.2
52.5°	1258.9	1130.5	992.6	881.8	801.2	751.0	715.7	693.5	673.2	641.2	602.2
55°	1134.5	1022.0	895.5	795.0	721.0	670.5	636.8	615.7	603.7	576.6	545.9
57.5°	990.9	910.3	798.8	701.9	636.4	586.5	561.8	543.9	530.2	511.1	489.5
60°	890.7	834.2	734.2	642.2	582.0	534.4	512.2	497.1	484.5	468.2	451.4
62.5°	789.2	748.0	661.1	582.0	526.6	486.8	465.9	452.4	437.8	426.9	410.5
65°	653.0	616.3	556.1	494.1	443.0	411.1	396.0	384.0	375.0	362.9	351.5
67.5°	508.0	493.0	451.5	408.8	372.0	343.7	330.6	322.3	311.4	304.2	296.3
70°	418.9	411.7	382.2	353.9	319.6	300.3	288.3	284.6	271.4	264.2	258.8
72.5°	339.9	336.5	319.6	300.0	275.8	259.0	247.8	243.8	235.3	229.5	226.0
75°	232.9	234.2	231.1	218.5	209.5	198.6	189.0	186.5	180.6	175.8	172.7
77.5°	147.3	153.5	153.7	153.1	149.5	142.9	138.9	137.1	131.2	129.4	128.7
80°	101.1	107.7	113.8	113.2	111.9	110.1	107.1	105.3	102.3	100.5	99.3
82.5°	67.4	73.6	78.6	81.9	81.6	79.8	77.8	77.0	76.3	75.0	74.7
85°	31.9	33.1	34.9	39.1	42.1	42.7	42.1	41.6	39.7	40.3	40.9
87.5°	12.1	11.9	12.3	12.2	11.6	13.8	15.2	15.5	14.7	13.8	13.0
90°	5.2	4.5	3.9	3.3	2.6	1.9	1.2	0.4	1.2	1.9	2.6
92.5°	14.0	13.2	12.4	11.8	11.3	10.8	10.3	9.8	10.3	10.8	11.3
95°	29.3	28.4	27.6	27.0	26.8	26.7	26.5	26.3	26.5	26.7	26.8
97.5°	47.1	45.8	44.6	44.0	43.9	43.8	43.7	43.6	43.7	43.8	43.9
100°	59.5	58.3	57.2	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6
102.5°	73.6	73.0	72.4	72.0	71.6	71.2	70.8	70.4	70.8	71.2	71.6
105°	95.5	95.0	94.4	94.0	93.5	93.0	92.6	92.1	92.6	93.0	93.5
107.5°	119.1	118.7	118.3	117.9	117.4	117.0	116.5	116.1	116.5	117.0	117.4
110°	135.3	135.0	134.7	134.4	133.9	133.5	133.0	132.6	133.0	133.5	133.9



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	151.3	151.0	150.6	150.3	150.1	149.8	149.6	149.4	149.6	149.8	150.1
115°	176.3	176.1	175.9	175.7	175.3	175.0	174.5	174.2	174.5	175.0	175.3
117.5°	200.2	200.1	199.9	199.7	199.6	199.4	199.2	199.1	199.2	199.4	199.6
120°	216.9	216.8	216.7	216.4	216.0	215.5	215.1	214.6	215.1	215.5	216.0
122.5°	232.7	232.5	232.3	232.0	231.9	231.8	231.6	231.4	231.6	231.8	231.9
125°	256.9	256.8	256.7	256.4	255.8	255.3	254.8	254.2	254.8	255.3	255.8
127.5°	280.1	280.0	279.9	279.7	279.4	279.1	278.7	278.5	278.7	279.1	279.4
130°	295.5	295.3	295.2	294.8	294.4	293.9	293.5	293.0	293.5	293.9	294.4
132.5°	310.8	310.9	310.9	310.5	309.8	309.1	308.3	307.6	308.3	309.1	309.8
135°	333.2	333.1	333.1	332.8	332.3	331.7	331.2	330.6	331.2	331.7	332.3
137.5°	355.1	354.9	354.7	354.4	353.8	353.3	352.8	352.2	352.8	353.3	353.8
140°	368.9	368.6	368.4	367.9	367.5	367.0	366.6	366.1	366.6	367.0	367.5
142.5°	382.6	382.3	381.9	381.6	381.2	380.8	380.4	380.0	380.4	380.8	381.2
145°	402.8	402.5	402.3	402.0	401.6	401.3	400.9	400.6	400.9	401.3	401.6
147.5°	420.9	420.6	420.4	420.3	420.0	419.8	419.6	419.5	419.6	419.8	420.0
150°	432.6	432.2	431.9	431.7	431.8	431.9	431.9	432.0	431.9	431.9	431.8
152.5°	443.4	443.2	443.0	442.9	442.7	442.6	442.6	442.4	442.6	442.6	442.7
155°	458.5	458.4	458.3	458.3	458.3	458.3	458.3	458.3	458.3	458.3	458.3
157.5°	471.9	471.8	471.7	471.7	472.0	472.2	472.3	472.5	472.3	472.2	472.0
160°	479.9	479.8	479.7	479.8	480.1	480.4	480.7	481.0	480.7	480.4	480.1
162.5°	487.5	487.5	487.5	487.6	487.8	488.0	488.2	488.4	488.2	488.0	487.8
165°	497.8	497.7	497.6	497.6	497.8	497.9	498.1	498.3	498.1	497.9	497.8
167.5°	505.2	505.2	505.2	505.3	505.7	506.0	506.4	506.8	506.4	506.0	505.7
170°	509.6	509.6	509.6	509.8	510.1	510.5	510.9	511.2	510.9	510.5	510.1
172.5°	512.9	512.9	512.9	513.1	513.4	513.8	514.2	514.5	514.2	513.8	513.4
175°	516.5	516.5	516.5	516.7	517.0	517.4	517.7	518.2	517.7	517.4	517.0
177.5°	518.5	518.6	518.6	518.8	519.2	519.4	519.7	520.0	519.7	519.4	519.2
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1441.5	1434.9	1430.0	1420.4	1413.6	1410.8	1405.4	1404.0	1409.3	1405.4	1405.0
5°	1398.7	1381.3	1367.4	1353.5	1338.5	1328.9	1314.5	1312.1	1308.4	1303.0	1301.8
7.5°	1347.3	1324.5	1306.7	1283.9	1264.0	1248.0	1229.9	1221.4	1216.7	1209.7	1200.3
10°	1312.6	1285.6	1261.5	1238.6	1214.0	1194.1	1176.0	1162.2	1153.2	1144.7	1141.1
12.5°	1278.4	1250.9	1220.0	1192.4	1164.8	1142.5	1122.6	1113.6	1103.6	1093.7	1085.3
15°	1225.4	1188.7	1154.9	1123.0	1099.6	1075.5	1056.2	1043.0	1028.0	1023.8	1007.5
17.5°	1169.0	1133.0	1093.6	1060.0	1032.8	1006.3	985.1	970.1	958.8	943.3	935.8
20°	1133.9	1091.2	1052.7	1022.0	991.8	960.6	938.9	926.2	915.4	902.8	896.8
22.5°	1096.4	1054.5	1015.1	979.1	948.5	917.7	902.3	889.2	876.9	865.2	857.3
25°	1041.2	999.1	957.5	920.2	888.3	866.0	848.0	832.9	826.3	814.9	806.5
27.5°	986.7	941.9	898.8	861.6	836.6	814.6	799.8	787.8	775.9	765.9	758.6
30°	951.5	905.8	858.8	829.4	802.9	781.8	765.5	754.1	745.1	736.1	730.7
32.5°	916.4	869.2	827.5	795.7	770.6	752.4	735.7	724.8	715.2	705.3	698.8
35°	860.1	811.9	778.2	746.9	722.2	705.3	693.9	678.3	670.5	663.3	656.7
37.5°	807.7	762.9	726.5	699.0	677.5	660.8	646.0	637.6	627.9	621.4	615.9
40°	769.2	728.3	695.2	666.3	650.6	632.0	618.1	607.3	600.0	591.7	585.6
42.5°	734.5	696.4	664.3	638.3	618.8	603.1	589.7	578.9	569.7	563.7	558.7
45°	685.5	647.6	616.3	592.2	574.2	559.1	545.3	539.8	527.8	520.6	518.2
47.5°	634.8	600.9	570.7	548.5	530.0	515.8	502.7	491.7	485.1	478.0	474.1
50°	600.7	568.1	539.8	518.2	500.2	484.5	472.4	465.2	456.2	449.6	444.8
52.5°	566.5	536.4	508.1	487.4	471.7	456.1	442.6	435.4	426.9	422.6	419.3
55°	517.6	485.7	461.6	441.1	424.9	410.5	397.8	390.6	385.2	380.9	379.8
57.5°	462.3	436.9	414.6	396.1	379.2	365.7	354.6	347.8	343.0	342.3	338.8
60°	426.1	403.2	382.8	362.9	348.5	335.8	326.2	318.3	313.5	313.0	311.7
62.5°	390.0	368.1	349.1	331.6	318.6	306.5	297.3	288.6	285.6	282.7	280.0
65°	336.4	316.6	301.0	287.0	273.2	263.0	254.0	248.6	241.9	238.4	231.8
67.5°	283.8	268.4	253.4	241.7	230.9	221.1	213.7	205.6	201.2	198.2	193.4
70°	249.1	237.1	222.1	209.5	201.0	193.2	187.2	178.2	175.1	172.7	170.3
72.5°	216.4	205.8	193.2	183.0	174.5	167.2	160.2	156.0	153.0	150.6	149.2
75°	170.3	160.1	149.3	142.0	136.0	130.0	126.4	123.4	122.2	121.5	119.1
77.5°	125.1	119.7	111.0	105.2	101.2	98.8	95.6	94.0	93.9	91.2	90.4
80°	95.7	92.6	85.4	83.0	80.1	77.7	75.8	72.9	69.8	68.6	66.8
82.5°	71.2	68.1	65.3	61.3	58.9	57.4	55.6	54.5	54.9	53.2	52.3
85°	37.9	34.9	33.7	33.1	31.9	33.1	32.5	31.9	31.3	30.7	31.3
87.5°	12.7	12.8	12.5	13.6	12.2	12.8	12.9	12.6	12.7	12.8	12.3
90°	3.3	3.9	4.5	5.2	5.8	6.5	7.0	7.4	7.8	8.3	8.6
92.5°	11.8	12.4	13.2	14.0	14.7	15.5	16.1	16.7	17.3	17.9	18.3
95°	27.0	27.6	28.4	29.3	30.2	31.1	31.7	32.4	33.0	33.6	34.1
97.5°	44.0	44.6	45.8	47.1	48.3	49.6	50.1	50.7	51.4	51.9	52.3
100°	56.6	57.2	58.3	59.5	60.6	61.8	62.7	63.5	64.3	65.1	65.5
102.5°	72.0	72.4	73.0	73.6	74.2	74.7	75.6	76.5	77.4	78.3	78.8
105°	94.0	94.4	95.0	95.5	96.0	96.6	97.1	97.6	98.2	98.7	99.2
107.5°	117.9	118.3	118.7	119.1	119.6	119.9	120.2	120.5	120.7	121.0	121.2
110°	134.4	134.7	135.0	135.3	135.5	135.8	136.1	136.3	136.6	136.9	137.0



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	150.3	150.6	151.0	151.3	151.6	151.9	152.1	152.2	152.3	152.5	152.5
115°	175.7	175.9	176.1	176.3	176.5	176.6	176.6	176.5	176.4	176.3	176.2
117.5°	199.7	199.9	200.1	200.2	200.4	200.5	200.6	200.7	200.7	200.8	200.7
120°	216.4	216.7	216.8	216.9	217.0	217.0	217.0	217.0	217.0	217.0	216.9
122.5°	232.0	232.3	232.5	232.7	233.0	233.2	233.1	233.1	233.0	232.9	232.7
125°	256.4	256.7	256.8	256.9	257.0	257.1	256.9	256.7	256.5	256.4	256.2
127.5°	279.7	279.9	280.0	280.1	280.2	280.4	280.3	280.2	280.1	280.0	279.8
130°	294.8	295.2	295.3	295.5	295.7	295.9	295.8	295.7	295.6	295.5	295.3
132.5°	310.5	310.9	310.9	310.8	310.8	310.7	310.6	310.5	310.4	310.3	310.2
135°	332.8	333.1	333.1	333.2	333.3	333.4	333.4	333.4	333.4	333.4	333.2
137.5°	354.4	354.7	354.9	355.1	355.3	355.5	355.6	355.7	355.8	356.0	355.8
140°	367.9	368.4	368.6	368.9	369.2	369.4	369.6	369.8	370.0	370.1	370.0
142.5°	381.6	381.9	382.3	382.6	383.0	383.3	383.4	383.5	383.6	383.7	383.5
145°	402.0	402.3	402.5	402.8	403.1	403.3	403.3	403.3	403.3	403.3	403.2
147.5°	420.3	420.4	420.6	420.9	421.1	421.3	421.5	421.7	422.0	422.1	422.0
150°	431.7	431.9	432.2	432.6	432.9	433.3	433.3	433.3	433.3	433.3	433.2
152.5°	442.9	443.0	443.2	443.4	443.4	443.6	443.8	444.1	444.3	444.4	444.4
155°	458.3	458.3	458.4	458.5	458.6	458.7	459.1	459.4	459.8	460.1	460.1
157.5°	471.7	471.7	471.8	471.9	472.0	472.1	472.4	472.8	473.1	473.5	473.4
160°	479.8	479.7	479.8	479.9	480.0	480.1	480.5	480.9	481.3	481.6	481.5
162.5°	487.6	487.5	487.5	487.5	487.6	487.6	488.0	488.5	488.8	489.3	489.3
165°	497.6	497.6	497.7	497.8	497.8	497.9	498.3	498.6	499.0	499.4	499.3
167.5°	505.3	505.2	505.2	505.2	505.2	505.2	505.7	506.2	506.8	507.3	507.3
170°	509.8	509.6	509.6	509.6	509.6	509.6	510.1	510.7	511.2	511.8	511.8
172.5°	513.1	512.9	512.9	512.9	512.9	512.9	513.4	514.0	514.5	515.1	515.1
175°	516.7	516.5	516.5	516.5	516.5	516.5	517.0	517.5	518.2	518.7	518.6
177.5°	518.8	518.6	518.6	518.5	518.4	518.4	518.8	519.2	519.7	520.1	520.0
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1404.4	1399.2	1397.8	1399.6	1397.8	1399.2	1404.4	1405.0	1405.4	1409.3	1404.0
5°	1295.8	1289.8	1292.8	1291.6	1292.8	1289.8	1295.8	1301.8	1303.0	1308.4	1312.1
7.5°	1200.2	1192.8	1184.8	1187.3	1184.8	1192.8	1200.2	1200.3	1209.7	1216.7	1221.4
10°	1133.3	1127.3	1123.6	1126.7	1123.6	1127.3	1133.3	1141.1	1144.7	1153.2	1162.2
12.5°	1076.9	1073.4	1070.2	1068.9	1070.2	1073.4	1076.9	1085.3	1093.7	1103.6	1113.6
15°	1000.3	993.1	990.1	982.2	990.1	993.1	1000.3	1007.5	1023.8	1028.0	1043.0
17.5°	929.6	927.2	919.4	916.1	919.4	927.2	929.6	935.8	943.3	958.8	970.1
20°	887.7	885.3	877.5	882.3	877.5	885.3	887.7	896.8	902.8	915.4	926.2
22.5°	853.1	847.7	845.3	843.8	845.3	847.7	853.1	857.3	865.2	876.9	889.2
25°	804.1	796.2	793.3	789.6	793.3	796.2	804.1	806.5	814.9	826.3	832.9
27.5°	755.2	751.0	747.0	746.1	747.0	751.0	755.2	758.6	765.9	775.9	787.8
30°	723.4	719.3	716.2	716.2	716.2	719.3	723.4	730.7	736.1	745.1	754.1
32.5°	695.0	691.8	688.8	688.3	688.8	691.8	695.0	698.8	705.3	715.2	724.8
35°	653.6	648.8	647.6	644.0	647.6	648.8	653.6	656.7	663.3	670.5	678.3
37.5°	610.6	606.6	606.5	606.2	606.5	606.6	610.6	615.9	621.4	627.9	637.6
40°	583.2	580.1	579.6	575.3	579.6	580.1	583.2	585.6	591.7	600.0	607.3
42.5°	553.8	552.2	550.2	548.4	550.2	552.2	553.8	558.7	563.7	569.7	578.9
45°	514.0	509.8	509.8	506.8	509.8	509.8	514.0	518.2	520.6	527.8	539.8
47.5°	472.8	469.6	469.9	466.8	469.9	469.6	472.8	474.1	478.0	485.1	491.7
50°	445.4	443.5	443.0	441.8	443.0	443.5	445.4	444.8	449.6	456.2	465.2
52.5°	417.9	417.1	419.4	416.7	419.4	417.1	417.9	419.3	422.6	426.9	435.4
55°	380.9	379.2	382.8	379.2	382.8	379.2	380.9	379.8	380.9	385.2	390.6
57.5°	338.5	336.8	340.0	338.2	340.0	336.8	338.5	338.8	342.3	343.0	347.8
60°	310.6	306.9	308.7	309.3	308.7	306.9	310.6	311.7	313.0	313.5	318.3
62.5°	277.3	275.2	276.5	273.8	276.5	275.2	277.3	280.0	282.7	285.6	288.6
65°	230.5	228.7	226.3	225.1	226.3	228.7	230.5	231.8	238.4	241.9	248.6
67.5°	193.7	189.3	189.2	190.2	189.2	189.3	193.7	193.4	198.2	201.2	205.6
70°	166.7	166.7	166.1	166.1	166.1	166.7	166.7	170.3	172.7	175.1	178.2
72.5°	147.9	147.5	146.3	145.9	146.3	147.5	147.9	149.2	150.6	153.0	156.0
75°	119.1	119.8	118.6	118.0	118.6	119.8	119.1	119.1	121.5	122.2	123.4
77.5°	88.0	85.4	86.8	85.4	86.8	85.4	88.0	90.4	91.2	93.9	94.0
80°	66.8	66.2	68.0	66.2	68.0	66.2	66.8	66.8	68.6	69.8	72.9
82.5°	52.9	52.3	53.1	51.7	53.1	52.3	52.9	52.3	53.2	54.9	54.5
85°	31.9	31.3	30.7	31.3	30.7	31.3	31.9	31.3	30.7	31.3	31.9
87.5°	12.8	12.4	12.5	12.6	12.5	12.4	12.8	12.3	12.8	12.7	12.6
90°	8.9	9.2	9.5	9.7	9.5	9.2	8.9	8.6	8.3	7.8	7.4
92.5°	18.5	18.6	18.9	19.1	18.9	18.6	18.5	18.3	17.9	17.3	16.7
95°	34.2	34.4	34.6	34.8	34.6	34.4	34.2	34.1	33.6	33.0	32.4
97.5°	52.3	52.5	52.6	52.7	52.6	52.5	52.3	52.3	51.9	51.4	50.7
100°	65.7	65.9	66.1	66.3	66.1	65.9	65.7	65.5	65.1	64.3	63.5
102.5°	79.1	79.4	79.6	79.9	79.6	79.4	79.1	78.8	78.3	77.4	76.5
105°	99.4	99.7	100.0	100.2	100.0	99.7	99.4	99.2	98.7	98.2	97.6
107.5°	121.2	121.1	121.1	121.1	121.1	121.1	121.2	121.2	121.0	120.7	120.5
110°	136.9	136.8	136.7	136.6	136.7	136.8	136.9	137.0	136.9	136.6	136.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	152.3	152.1	151.9	151.8	151.9	152.1	152.3	152.5	152.5	152.3	152.2
115°	176.1	176.0	175.9	175.8	175.9	176.0	176.1	176.2	176.3	176.4	176.5
117.5°	200.4	200.0	199.6	199.2	199.6	200.0	200.4	200.7	200.8	200.7	200.7
120°	216.5	216.2	215.8	215.4	215.8	216.2	216.5	216.9	217.0	217.0	217.0
122.5°	232.5	232.2	231.8	231.6	231.8	232.2	232.5	232.7	232.9	233.0	233.1
125°	256.1	256.0	255.9	255.8	255.9	256.0	256.1	256.2	256.4	256.5	256.7
127.5°	279.6	279.5	279.3	279.1	279.3	279.5	279.6	279.8	280.0	280.1	280.2
130°	295.2	295.0	294.8	294.6	294.8	295.0	295.2	295.3	295.5	295.6	295.7
132.5°	310.0	309.7	309.4	309.2	309.4	309.7	310.0	310.2	310.3	310.4	310.5
135°	332.9	332.5	332.2	331.8	332.2	332.5	332.9	333.2	333.4	333.4	333.4
137.5°	355.3	354.9	354.4	353.9	354.4	354.9	355.3	355.8	356.0	355.8	355.7
140°	369.5	369.1	368.6	368.2	368.6	369.1	369.5	370.0	370.1	370.0	369.8
142.5°	383.1	382.6	382.2	381.7	382.2	382.6	383.1	383.5	383.7	383.6	383.5
145°	403.0	402.7	402.4	402.2	402.4	402.7	403.0	403.2	403.3	403.3	403.3
147.5°	421.3	420.7	420.1	419.5	420.1	420.7	421.3	422.0	422.1	422.0	421.7
150°	433.0	432.8	432.7	432.5	432.7	432.8	433.0	433.2	433.3	433.3	433.3
152.5°	444.1	443.8	443.4	443.1	443.4	443.8	444.1	444.4	444.4	444.3	444.1
155°	459.7	459.2	458.8	458.3	458.8	459.2	459.7	460.1	460.1	459.8	459.4
157.5°	472.8	472.2	471.6	471.0	471.6	472.2	472.8	473.4	473.5	473.1	472.8
160°	481.1	480.6	480.2	479.7	480.2	480.6	481.1	481.5	481.6	481.3	480.9
162.5°	488.7	488.2	487.7	487.1	487.7	488.2	488.7	489.3	489.3	488.8	488.5
165°	498.7	498.2	497.7	497.1	497.7	498.2	498.7	499.3	499.4	499.0	498.6
167.5°	506.7	506.1	505.6	505.1	505.6	506.1	506.7	507.3	507.3	506.8	506.2
170°	511.1	510.5	509.9	509.3	509.9	510.5	511.1	511.8	511.8	511.2	510.7
172.5°	514.4	513.9	513.4	512.8	513.4	513.9	514.4	515.1	515.1	514.5	514.0
175°	518.0	517.4	516.7	516.1	516.7	517.4	518.0	518.6	518.7	518.2	517.5
177.5°	519.6	519.1	518.5	518.1	518.5	519.1	519.6	520.0	520.1	519.7	519.2
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1405.4	1410.8	1413.6	1420.4	1430.0	1434.9	1441.5	1446.4	1453.1	1461.3	1468.0
5°	1314.5	1328.9	1338.5	1353.5	1367.4	1381.3	1398.7	1411.3	1428.2	1447.4	1462.5
7.5°	1229.9	1248.0	1264.0	1283.9	1306.7	1324.5	1347.3	1370.6	1396.9	1424.2	1450.0
10°	1176.0	1194.1	1214.0	1238.6	1261.5	1285.6	1312.6	1339.7	1372.8	1403.6	1438.4
12.5°	1122.6	1142.5	1164.8	1192.4	1220.0	1250.9	1278.4	1308.9	1344.4	1384.3	1421.6
15°	1056.2	1075.5	1099.6	1123.0	1154.9	1188.7	1225.4	1265.7	1305.4	1350.0	1396.3
17.5°	985.1	1006.3	1032.8	1060.0	1093.6	1133.0	1169.0	1213.2	1257.8	1309.7	1364.3
20°	938.9	960.6	991.8	1022.0	1052.7	1091.2	1133.9	1179.0	1226.5	1281.4	1342.1
22.5°	902.3	917.7	948.5	979.1	1015.1	1054.5	1096.4	1143.4	1195.2	1252.0	1315.6
25°	848.0	866.0	888.3	920.2	957.5	999.1	1041.2	1091.2	1147.7	1205.5	1273.5
27.5°	799.8	814.6	836.6	861.6	898.8	941.9	986.7	1038.8	1096.8	1155.7	1227.2
30°	765.5	781.8	802.9	829.4	858.8	905.8	951.5	1002.7	1061.7	1122.5	1195.9
32.5°	735.7	752.4	770.6	795.7	827.5	869.2	916.4	966.6	1026.5	1089.2	1160.7
35°	693.9	705.3	722.2	746.9	778.2	811.9	860.1	913.0	971.4	1036.4	1108.0
37.5°	646.0	660.8	677.5	699.0	726.5	762.9	807.7	861.2	915.4	977.7	1043.0
40°	618.1	632.0	650.6	666.3	695.2	728.3	769.2	825.1	879.3	937.7	997.3
42.5°	589.7	603.1	618.8	638.3	664.3	696.4	734.5	786.6	844.6	899.6	949.6
45°	545.3	559.1	574.2	592.2	616.3	647.6	685.5	733.1	783.6	834.2	872.1
47.5°	502.7	515.8	530.0	548.5	570.7	600.9	634.8	676.8	725.9	768.9	796.0
50°	472.4	484.5	500.2	518.2	539.8	568.1	600.7	642.2	683.1	722.2	746.9
52.5°	442.6	456.1	471.7	487.4	508.1	536.4	566.5	602.2	641.2	673.2	693.5
55°	397.8	410.5	424.9	441.1	461.6	485.7	517.6	545.9	576.6	603.7	615.7
57.5°	354.6	365.7	379.2	396.1	414.6	436.9	462.3	489.5	511.1	530.2	543.9
60°	326.2	335.8	348.5	362.9	382.8	403.2	426.1	451.4	468.2	484.5	497.1
62.5°	297.3	306.5	318.6	331.6	349.1	368.1	390.0	410.5	426.9	437.8	452.4
65°	254.0	263.0	273.2	287.0	301.0	316.6	336.4	351.5	362.9	375.0	384.0
67.5°	213.7	221.1	230.9	241.7	253.4	268.4	283.8	296.3	304.2	311.4	322.3
70°	187.2	193.2	201.0	209.5	222.1	237.1	249.1	258.8	264.2	271.4	284.6
72.5°	160.2	167.2	174.5	183.0	193.2	205.8	216.4	226.0	229.5	235.3	243.8
75°	126.4	130.0	136.0	142.0	149.3	160.1	170.3	172.7	175.8	180.6	186.5
77.5°	95.6	98.8	101.2	105.2	111.0	119.7	125.1	128.7	129.4	131.2	137.1
80°	75.8	77.7	80.1	83.0	85.4	92.6	95.7	99.3	100.5	102.3	105.3
82.5°	55.6	57.4	58.9	61.3	65.3	68.1	71.2	74.7	75.0	76.3	77.0
85°	32.5	33.1	31.9	33.1	33.7	34.9	37.9	40.9	40.3	39.7	41.6
87.5°	12.9	12.8	12.2	13.6	12.5	12.8	12.7	13.0	13.8	14.7	15.5
90°	7.0	6.5	5.8	5.2	4.5	3.9	3.3	2.6	1.9	1.2	0.4
92.5°	16.1	15.5	14.7	14.0	13.2	12.4	11.8	11.3	10.8	10.3	9.8
95°	31.7	31.1	30.2	29.3	28.4	27.6	27.0	26.8	26.7	26.5	26.3
97.5°	50.1	49.6	48.3	47.1	45.8	44.6	44.0	43.9	43.8	43.7	43.6
100°	62.7	61.8	60.6	59.5	58.3	57.2	56.6	56.6	56.6	56.6	56.6
102.5°	75.6	74.7	74.2	73.6	73.0	72.4	72.0	71.6	71.2	70.8	70.4
105°	97.1	96.6	96.0	95.5	95.0	94.4	94.0	93.5	93.0	92.6	92.1
107.5°	120.2	119.9	119.6	119.1	118.7	118.3	117.9	117.4	117.0	116.5	116.1
110°	136.1	135.8	135.5	135.3	135.0	134.7	134.4	133.9	133.5	133.0	132.6



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	152.1	151.9	151.6	151.3	151.0	150.6	150.3	150.1	149.8	149.6	149.4
115°	176.6	176.6	176.5	176.3	176.1	175.9	175.7	175.3	175.0	174.5	174.2
117.5°	200.6	200.5	200.4	200.2	200.1	199.9	199.7	199.6	199.4	199.2	199.1
120°	217.0	217.0	217.0	216.9	216.8	216.7	216.4	216.0	215.5	215.1	214.6
122.5°	233.1	233.2	233.0	232.7	232.5	232.3	232.0	231.9	231.8	231.6	231.4
125°	256.9	257.1	257.0	256.9	256.8	256.7	256.4	255.8	255.3	254.8	254.2
127.5°	280.3	280.4	280.2	280.1	280.0	279.9	279.7	279.4	279.1	278.7	278.5
130°	295.8	295.9	295.7	295.5	295.3	295.2	294.8	294.4	293.9	293.5	293.0
132.5°	310.6	310.7	310.8	310.8	310.9	310.9	310.5	309.8	309.1	308.3	307.6
135°	333.4	333.4	333.3	333.2	333.1	333.1	332.8	332.3	331.7	331.2	330.6
137.5°	355.6	355.5	355.3	355.1	354.9	354.7	354.4	353.8	353.3	352.8	352.2
140°	369.6	369.4	369.2	368.9	368.6	368.4	367.9	367.5	367.0	366.6	366.1
142.5°	383.4	383.3	383.0	382.6	382.3	381.9	381.6	381.2	380.8	380.4	380.0
145°	403.3	403.3	403.1	402.8	402.5	402.3	402.0	401.6	401.3	400.9	400.6
147.5°	421.5	421.3	421.1	420.9	420.6	420.4	420.3	420.0	419.8	419.6	419.5
150°	433.3	433.3	432.9	432.6	432.2	431.9	431.7	431.8	431.9	431.9	432.0
152.5°	443.8	443.6	443.4	443.4	443.2	443.0	442.9	442.7	442.6	442.6	442.4
155°	459.1	458.7	458.6	458.5	458.4	458.3	458.3	458.3	458.3	458.3	458.3
157.5°	472.4	472.1	472.0	471.9	471.8	471.7	471.7	472.0	472.2	472.3	472.5
160°	480.5	480.1	480.0	479.9	479.8	479.7	479.8	480.1	480.4	480.7	481.0
162.5°	488.0	487.6	487.6	487.5	487.5	487.5	487.6	487.8	488.0	488.2	488.4
165°	498.3	497.9	497.8	497.8	497.7	497.6	497.6	497.8	497.9	498.1	498.3
167.5°	505.7	505.2	505.2	505.2	505.2	505.2	505.3	505.7	506.0	506.4	506.8
170°	510.1	509.6	509.6	509.6	509.6	509.6	509.8	510.1	510.5	510.9	511.2
172.5°	513.4	512.9	512.9	512.9	512.9	512.9	513.1	513.4	513.8	514.2	514.5
175°	517.0	516.5	516.5	516.5	516.5	516.5	516.7	517.0	517.4	517.7	518.2
177.5°	518.8	518.4	518.4	518.5	518.6	518.6	518.8	519.2	519.4	519.7	520.0
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1473.4	1477.7	1483.9	1491.1	1496.9	1503.2	1506.5	1506.5	1509.5	1515.7	1523.9
5°	1477.6	1493.2	1508.2	1527.5	1542.6	1560.0	1573.2	1585.9	1597.3	1611.8	1626.8
7.5°	1476.3	1502.4	1529.5	1559.8	1593.2	1619.8	1647.2	1668.6	1689.8	1717.4	1739.2
10°	1471.5	1505.2	1541.9	1580.5	1622.6	1659.3	1692.4	1722.5	1751.4	1781.5	1808.6
12.5°	1462.9	1505.7	1550.6	1596.9	1650.0	1692.0	1734.8	1766.8	1800.5	1833.4	1866.8
15°	1449.8	1500.4	1554.6	1619.0	1684.0	1730.9	1773.1	1814.6	1845.8	1883.2	1915.1
17.5°	1423.0	1488.2	1556.3	1626.7	1689.2	1743.7	1787.9	1827.4	1860.7	1901.8	1945.1
20°	1407.1	1477.6	1548.5	1623.8	1683.4	1739.4	1782.1	1823.0	1864.6	1918.1	1971.0
22.5°	1385.0	1460.2	1535.5	1607.0	1669.9	1723.9	1768.1	1818.2	1872.7	1933.5	1997.5
25°	1350.0	1427.6	1502.3	1570.2	1631.7	1687.0	1747.2	1814.6	1880.8	1960.9	2052.9
27.5°	1305.6	1380.4	1447.0	1518.9	1579.8	1650.3	1725.4	1798.5	1893.9	2004.0	2119.0
30°	1272.3	1343.4	1406.5	1474.5	1543.7	1621.4	1705.7	1791.7	1905.5	2034.9	2171.5
32.5°	1233.8	1298.1	1360.8	1426.4	1506.2	1591.5	1681.1	1786.5	1922.4	2069.6	2211.0
35°	1167.0	1224.8	1285.6	1358.3	1443.2	1536.0	1650.3	1778.5	1942.8	2101.0	2228.0
37.5°	1096.9	1142.5	1203.5	1280.4	1372.8	1480.1	1609.8	1765.6	1934.4	2076.3	2130.5
40°	1043.0	1085.7	1150.1	1230.8	1322.2	1439.7	1585.3	1745.3	1915.1	2013.8	2009.6
42.5°	989.5	1032.8	1094.8	1175.9	1271.2	1402.6	1552.6	1718.9	1862.2	1899.7	1821.3
45°	907.6	947.9	1008.7	1090.6	1192.8	1330.7	1488.4	1647.9	1739.4	1678.6	1523.3
47.5°	824.0	863.2	919.6	999.8	1111.5	1255.7	1404.8	1535.7	1548.5	1418.0	1231.7
50°	769.2	805.8	859.4	944.9	1053.2	1194.1	1337.9	1440.8	1408.9	1249.5	1057.5
52.5°	715.7	751.0	801.2	881.8	992.6	1130.5	1258.9	1339.7	1266.0	1096.4	923.6
55°	636.8	670.5	721.0	795.0	895.5	1022.0	1134.5	1164.0	1055.6	884.8	745.1
57.5°	561.8	586.5	636.4	701.9	798.8	910.3	990.9	985.6	866.0	712.1	612.0
60°	512.2	534.4	582.0	642.2	734.2	834.2	890.7	866.7	745.7	618.7	522.4
62.5°	465.9	486.8	526.6	582.0	661.1	748.0	789.2	755.9	641.7	530.1	453.5
65°	396.0	411.1	443.0	494.1	556.1	616.3	653.0	604.2	503.2	418.9	361.1
67.5°	330.6	343.7	372.0	408.8	451.5	493.0	508.0	462.3	383.6	326.8	286.1
70°	288.3	300.3	319.6	353.9	382.2	411.7	418.9	378.0	312.4	269.0	243.8
72.5°	247.8	259.0	275.8	300.0	319.6	336.5	339.9	301.9	251.7	221.9	202.3
75°	189.0	198.6	209.5	218.5	231.1	234.2	232.9	203.4	176.4	156.5	145.6
77.5°	138.9	142.9	149.5	153.1	153.7	153.5	147.3	128.7	114.7	106.6	102.1
80°	107.1	110.1	111.9	113.2	113.8	107.7	101.1	89.7	84.9	80.1	74.6
82.5°	77.8	79.8	81.6	81.9	78.6	73.6	67.4	61.7	58.4	56.0	53.9
85°	42.1	42.7	42.1	39.1	34.9	33.1	31.9	30.7	30.1	29.5	29.5
87.5°	15.2	13.8	11.6	12.2	12.3	11.9	12.1	11.8	11.4	11.5	11.6
90°	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.5	7.0	7.4
92.5°	10.3	10.8	11.3	11.8	12.4	13.2	14.0	14.7	15.5	16.1	16.7
95°	26.5	26.7	26.8	27.0	27.6	28.4	29.3	30.2	31.1	31.7	32.4
97.5°	43.7	43.8	43.9	44.0	44.6	45.8	47.1	48.3	49.6	50.1	50.7
100°	56.6	56.6	56.6	56.6	57.2	58.3	59.5	60.6	61.8	62.7	63.5
102.5°	70.8	71.2	71.6	72.0	72.4	73.0	73.6	74.2	74.7	75.6	76.5
105°	92.6	93.0	93.5	94.0	94.4	95.0	95.5	96.0	96.6	97.1	97.6
107.5°	116.5	117.0	117.4	117.9	118.3	118.7	119.1	119.6	119.9	120.2	120.5
110°	133.0	133.5	133.9	134.4	134.7	135.0	135.3	135.5	135.8	136.1	136.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	149.6	149.8	150.1	150.3	150.6	151.0	151.3	151.6	151.9	152.1	152.2
115°	174.5	175.0	175.3	175.7	175.9	176.1	176.3	176.5	176.6	176.6	176.5
117.5°	199.2	199.4	199.6	199.7	199.9	200.1	200.2	200.4	200.5	200.6	200.7
120°	215.1	215.5	216.0	216.4	216.7	216.8	216.9	217.0	217.0	217.0	217.0
122.5°	231.6	231.8	231.9	232.0	232.3	232.5	232.7	233.0	233.2	233.1	233.1
125°	254.8	255.3	255.8	256.4	256.7	256.8	256.9	257.0	257.1	256.9	256.7
127.5°	278.7	279.1	279.4	279.7	279.9	280.0	280.1	280.2	280.4	280.3	280.2
130°	293.5	293.9	294.4	294.8	295.2	295.3	295.5	295.7	295.9	295.8	295.7
132.5°	308.3	309.1	309.8	310.5	310.9	310.9	310.8	310.8	310.7	310.6	310.5
135°	331.2	331.7	332.3	332.8	333.1	333.1	333.2	333.3	333.4	333.4	333.4
137.5°	352.8	353.3	353.8	354.4	354.7	354.9	355.1	355.3	355.5	355.6	355.7
140°	366.6	367.0	367.5	367.9	368.4	368.6	368.9	369.2	369.4	369.6	369.8
142.5°	380.4	380.8	381.2	381.6	381.9	382.3	382.6	383.0	383.3	383.4	383.5
145°	400.9	401.3	401.6	402.0	402.3	402.5	402.8	403.1	403.3	403.3	403.3
147.5°	419.6	419.8	420.0	420.3	420.4	420.6	420.9	421.1	421.3	421.5	421.7
150°	431.9	431.9	431.8	431.7	431.9	432.2	432.6	432.9	433.3	433.3	433.3
152.5°	442.6	442.6	442.7	442.9	443.0	443.2	443.4	443.4	443.6	443.8	444.1
155°	458.3	458.3	458.3	458.3	458.3	458.4	458.5	458.6	458.7	459.1	459.4
157.5°	472.3	472.2	472.0	471.7	471.7	471.8	471.9	472.0	472.1	472.4	472.8
160°	480.7	480.4	480.1	479.8	479.7	479.8	479.9	480.0	480.1	480.5	480.9
162.5°	488.2	488.0	487.8	487.6	487.5	487.5	487.5	487.6	487.6	488.0	488.5
165°	498.1	497.9	497.8	497.6	497.6	497.7	497.8	497.8	497.9	498.3	498.6
167.5°	506.4	506.0	505.7	505.3	505.2	505.2	505.2	505.2	505.2	505.7	506.2
170°	510.9	510.5	510.1	509.8	509.6	509.6	509.6	509.6	509.6	510.1	510.7
172.5°	514.2	513.8	513.4	513.1	512.9	512.9	512.9	512.9	512.9	513.4	514.0
175°	517.7	517.4	517.0	516.7	516.5	516.5	516.5	516.5	516.5	517.0	517.5
177.5°	519.7	519.4	519.2	518.8	518.6	518.6	518.5	518.4	518.4	518.8	519.2
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1530.2	1530.2	1538.4	1537.8	1543.2	1541.2	1542.2
5°	1644.8	1655.1	1664.1	1670.2	1679.2	1681.6	1680.3
7.5°	1763.8	1786.5	1797.6	1812.8	1815.5	1823.5	1822.7
10°	1837.5	1859.8	1876.6	1889.8	1896.4	1904.9	1905.5
12.5°	1895.2	1914.1	1929.0	1941.3	1949.4	1952.0	1953.6
15°	1940.4	1961.4	1978.9	1996.4	2006.6	2014.4	2018.7
17.5°	1985.8	2018.4	2049.2	2072.9	2087.1	2099.2	2099.0
20°	2021.1	2058.3	2096.9	2124.0	2151.6	2163.6	2165.4
22.5°	2058.6	2115.7	2165.3	2207.3	2243.5	2256.1	2260.8
25°	2136.5	2211.2	2287.7	2346.6	2388.7	2413.4	2417.1
27.5°	2230.8	2331.8	2412.3	2466.7	2501.7	2520.0	2523.9
30°	2297.3	2390.6	2462.8	2503.7	2520.0	2522.4	2513.4
32.5°	2327.1	2396.8	2425.7	2423.3	2391.4	2370.3	2362.1
35°	2290.6	2276.2	2205.8	2121.6	2057.2	2016.2	2005.4
37.5°	2084.6	1960.0	1830.5	1703.2	1635.4	1600.9	1541.7
40°	1881.4	1703.9	1569.1	1461.9	1385.5	1324.1	1309.7
42.5°	1652.3	1468.9	1334.1	1242.3	1181.3	1139.2	1120.9
45°	1327.7	1170.0	1058.6	988.3	941.3	910.6	896.8
47.5°	1061.9	939.9	858.7	806.6	770.9	744.1	736.6
50°	916.1	818.5	749.9	706.0	678.9	658.4	650.0
52.5°	795.7	716.9	664.2	627.9	602.4	589.6	582.6
55°	656.7	588.6	550.7	521.8	507.4	497.1	492.3
57.5°	537.0	487.9	460.2	440.2	426.9	420.4	417.9
60°	470.0	431.5	406.3	390.6	381.6	373.2	370.8
62.5°	410.8	380.5	361.0	347.2	338.2	334.7	333.1
65°	331.0	311.1	296.7	288.3	281.1	279.8	279.3
67.5°	263.1	251.5	243.9	235.1	232.6	228.4	227.5
70°	225.1	217.3	208.2	205.3	202.2	198.0	198.6
72.5°	190.9	183.1	176.9	173.0	171.9	170.0	171.7
75°	139.6	137.2	134.8	131.8	130.6	130.6	130.0
77.5°	99.7	97.6	95.0	93.2	92.8	90.2	91.2
80°	72.2	69.2	68.0	68.6	66.8	66.2	66.2
82.5°	53.4	52.3	51.2	51.3	50.9	50.3	50.8
85°	29.5	28.9	28.9	28.3	28.3	27.6	27.6
87.5°	12.1	12.8	11.9	11.4	11.5	12.0	12.6
90°	7.8	8.3	8.6	8.9	9.2	9.5	9.7
92.5°	17.3	17.9	18.3	18.5	18.6	18.9	19.1
95°	33.0	33.6	34.1	34.2	34.4	34.6	34.8
97.5°	51.4	51.9	52.3	52.3	52.5	52.6	52.7
100°	64.3	65.1	65.5	65.7	65.9	66.1	66.3
102.5°	77.4	78.3	78.8	79.1	79.4	79.6	79.9
105°	98.2	98.7	99.2	99.4	99.7	100.0	100.2
107.5°	120.7	121.0	121.2	121.2	121.1	121.1	121.1
110°	136.6	136.9	137.0	136.9	136.8	136.7	136.6



TEST NUMBER: P333701-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	152.3	152.5	152.5	152.3	152.1	151.9	151.8
115°	176.4	176.3	176.2	176.1	176.0	175.9	175.8
117.5°	200.7	200.8	200.7	200.4	200.0	199.6	199.2
120°	217.0	217.0	216.9	216.5	216.2	215.8	215.4
122.5°	233.0	232.9	232.7	232.5	232.2	231.8	231.6
125°	256.5	256.4	256.2	256.1	256.0	255.9	255.8
127.5°	280.1	280.0	279.8	279.6	279.5	279.3	279.1
130°	295.6	295.5	295.3	295.2	295.0	294.8	294.6
132.5°	310.4	310.3	310.2	310.0	309.7	309.4	309.2
135°	333.4	333.4	333.2	332.9	332.5	332.2	331.8
137.5°	355.8	356.0	355.8	355.3	354.9	354.4	353.9
140°	370.0	370.1	370.0	369.5	369.1	368.6	368.2
142.5°	383.6	383.7	383.5	383.1	382.6	382.2	381.7
145°	403.3	403.3	403.2	403.0	402.7	402.4	402.2
147.5°	422.0	422.1	422.0	421.3	420.7	420.1	419.5
150°	433.3	433.3	433.2	433.0	432.8	432.7	432.5
152.5°	444.3	444.4	444.4	444.1	443.8	443.4	443.1
155°	459.8	460.1	460.1	459.7	459.2	458.8	458.3
157.5°	473.1	473.5	473.4	472.8	472.2	471.6	471.0
160°	481.3	481.6	481.5	481.1	480.6	480.2	479.7
162.5°	488.8	489.3	489.3	488.7	488.2	487.7	487.1
165°	499.0	499.4	499.3	498.7	498.2	497.7	497.1
167.5°	506.8	507.3	507.3	506.7	506.1	505.6	505.1
170°	511.2	511.8	511.8	511.1	510.5	509.9	509.3
172.5°	514.5	515.1	515.1	514.4	513.9	513.4	512.8
175°	518.2	518.7	518.6	518.0	517.4	516.7	516.1
177.5°	519.7	520.1	520.0	519.6	519.1	518.5	518.1
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3

(END OF REPORT)