

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333703-940

Luminaire Tested: **S125RDIW-S1090D470U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333703-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1090D470U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5215.6 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 46.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

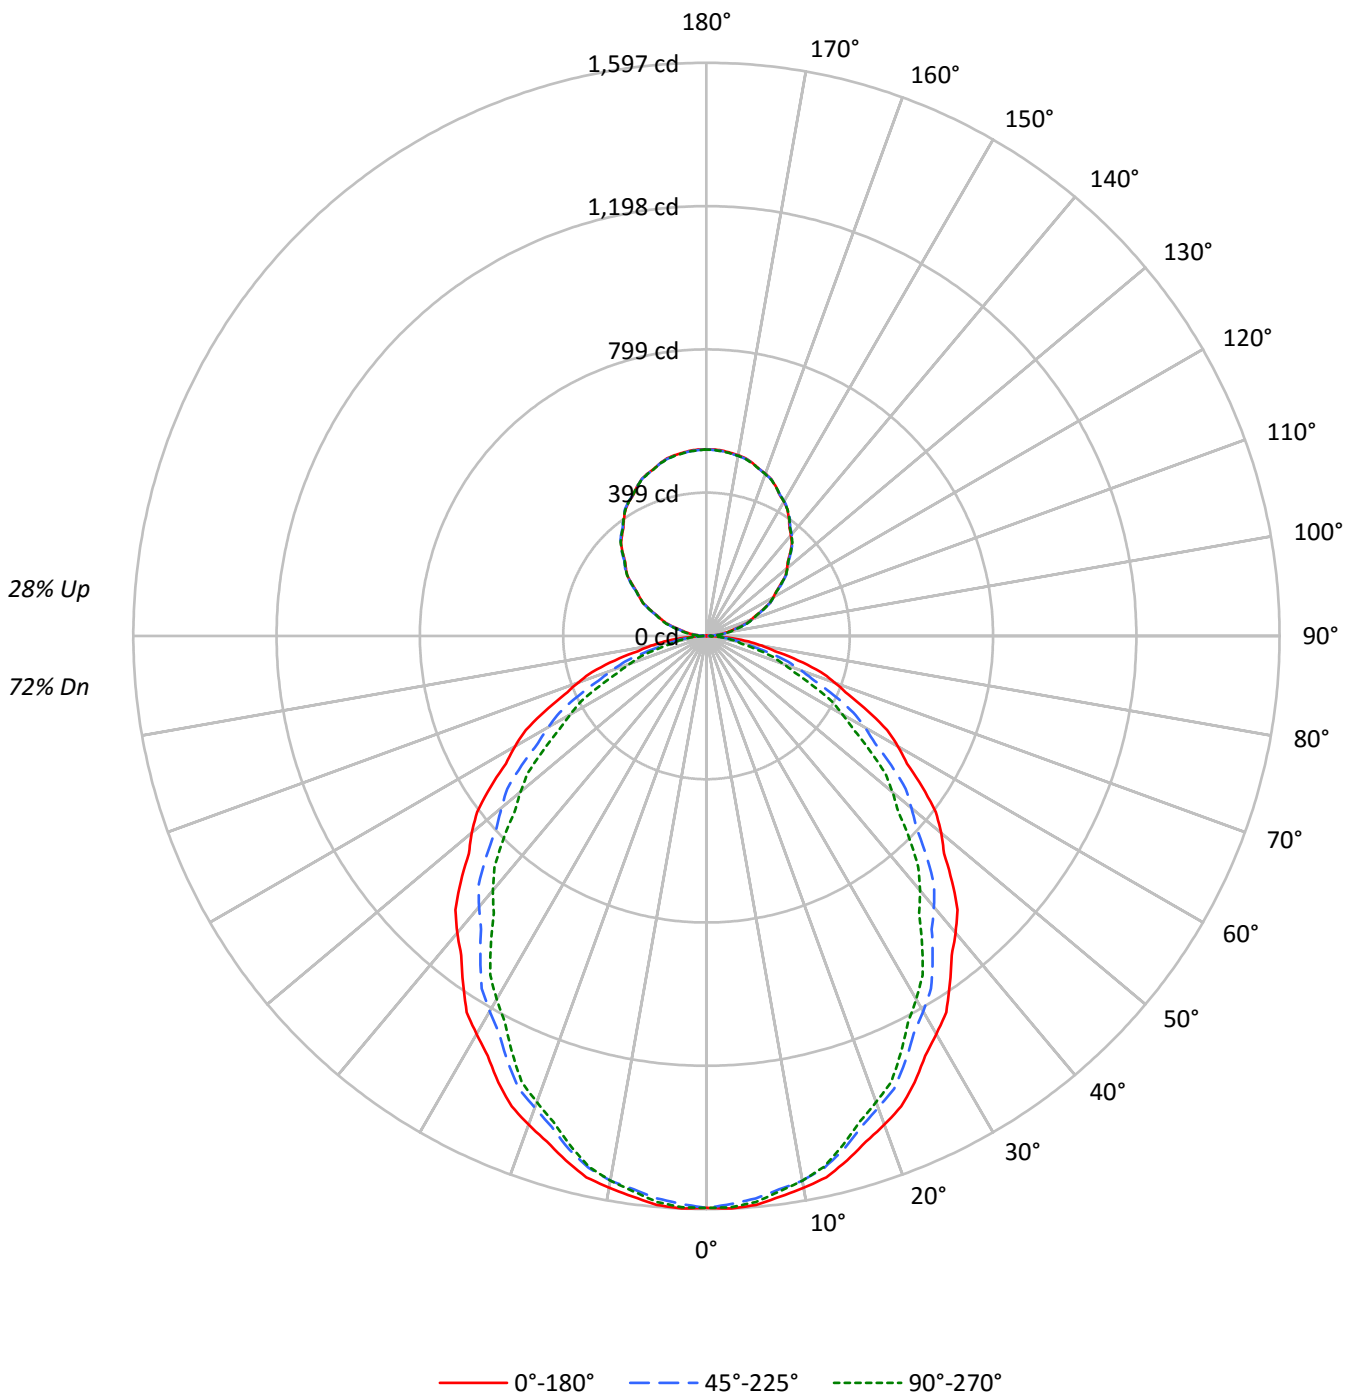



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	72
1	103	99	95	91	98	94	90	87	85	82	79	76	74	72	68	67	65	62
2	94	87	80	75	89	82	77	72	74	70	66	67	64	61	60	58	55	52
3	86	76	69	63	81	73	66	61	66	61	56	60	55	52	54	50	48	44
4	79	68	60	54	75	65	57	52	59	53	48	53	49	45	48	44	41	38
5	73	61	52	46	69	58	51	45	53	47	42	48	43	39	44	39	36	33
6	67	55	46	41	64	52	45	39	48	42	37	44	38	34	40	35	32	29
7	62	50	42	36	59	48	40	35	44	37	33	40	35	31	36	32	29	26
8	58	45	37	32	55	43	36	31	40	34	29	37	31	27	33	29	26	24
9	54	42	34	29	51	40	33	28	37	31	26	34	29	25	31	27	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10293	10293	10293
5°	10317	10200	10263
10°	10239	10105	10105
15°	10117	9900	9819
20°	9961	9614	9498
25°	9779	9333	9128
30°	9552	9004	8717
35°	9320	8665	8257
40°	9104	8312	7804
45°	8840	7916	7311
50°	8575	7486	6797
55°	8268	7076	6248
60°	7962	6577	5660
65°	7597	5997	4985
70°	7183	5274	4296
75°	6608	4447	3573
80°	5821	3492	2998
85°	4905	2853	2675



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.9	2.9
10°-20°	418.8	8.0
20°-30°	607.3	11.6
30°-40°	692.2	13.3
40°-50°	674.7	12.9
50°-60°	567.9	10.9
60°-70°	398.1	7.6
70°-80°	204.6	3.9
80°-90°	52.8	1.0
90°-100°	34.8	0.7
100°-110°	102.7	2.0
110°-120°	174.0	3.3
120°-130°	229.0	4.4
130°-140°	256.6	4.9
140°-150°	251.5	4.8
150°-160°	211.2	4.0
160°-170°	140.4	2.7
170°-180°	49.1	0.9
0°-30°	1176.0	22.5
0°-40°	1868.2	35.8
0°-60°	3110.9	59.6
0°-90°	3766.4	72.2
90°-120°	311.5	6.0
90°-150°	1048.5	20.1
90°-180°	1449.0	27.8
0°-180°	5215.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1594	1594	1594	1594	1594	
5°	1591	1586	1573	1585	1583	151
15°	1513	1505	1481	1479	1469	426
25°	1372	1353	1310	1294	1281	631
35°	1182	1152	1099	1065	1047	740
45°	968	931	867	820	800	746
55°	734	694	628	576	555	657
65°	497	455	392	346	326	492
75°	265	228	178	153	143	280
85°	66	45	38	37	36	74
90°	0	4	6	8	10	4
95°	26	27	31	34	35	28
105°	92	94	97	99	100	98
115°	174	176	177	176	176	172
125°	254	257	257	256	256	228
135°	331	333	333	333	332	255
145°	401	402	403	403	402	250
155°	458	458	459	460	458	211
165°	498	498	498	499	497	141
175°	518	517	516	519	516	49
180°	519	519	519	519	519	



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1596.7	1596.1	1595.4	1594.7	1594.1	1592.8	1590.6	1588.5	1586.4	1584.2	1586.4
5°	1591.4	1590.4	1589.3	1588.2	1587.2	1585.1	1582.2	1579.2	1576.3	1573.3	1576.0
7.5°	1575.7	1574.8	1573.7	1572.7	1571.6	1569.4	1565.8	1562.4	1558.8	1555.3	1557.2
10°	1561.3	1560.5	1559.7	1558.9	1558.1	1555.9	1552.1	1548.4	1544.6	1540.9	1541.7
12.5°	1544.9	1543.9	1542.9	1541.9	1540.9	1537.8	1532.9	1527.8	1522.8	1517.7	1518.3
15°	1513.1	1511.5	1509.9	1508.3	1506.7	1503.2	1497.5	1491.9	1486.3	1480.7	1480.4
17.5°	1477.3	1474.8	1472.4	1469.9	1467.4	1462.7	1455.6	1448.6	1441.5	1434.4	1433.1
20°	1449.4	1446.7	1444.0	1441.4	1438.7	1433.1	1424.5	1415.9	1407.4	1398.8	1397.5
22.5°	1418.5	1415.9	1413.2	1410.5	1407.8	1402.0	1393.0	1384.0	1375.0	1366.0	1363.4
25°	1372.3	1368.3	1364.3	1360.3	1356.3	1349.3	1339.4	1329.5	1319.6	1309.7	1306.3
27.5°	1319.4	1314.5	1309.6	1304.8	1299.8	1292.2	1281.6	1271.0	1260.3	1249.7	1244.9
30°	1280.9	1275.8	1270.7	1265.6	1260.5	1252.3	1241.1	1229.8	1218.6	1207.4	1201.2
32.5°	1243.2	1237.3	1231.4	1225.5	1219.5	1210.9	1199.4	1187.9	1176.4	1165.0	1158.2
35°	1182.1	1175.7	1169.3	1162.9	1156.5	1147.2	1135.1	1123.1	1111.1	1099.0	1091.3
37.5°	1122.1	1114.4	1106.5	1098.8	1090.9	1080.8	1068.4	1056.0	1043.6	1031.2	1021.8
40°	1079.8	1071.7	1063.7	1055.7	1047.7	1037.2	1024.4	1011.6	998.7	985.9	975.7
42.5°	1035.5	1027.3	1019.0	1010.8	1002.6	991.8	978.5	965.3	952.0	938.7	929.0
45°	967.9	960.1	952.3	944.6	936.8	925.6	910.9	896.2	881.5	866.7	856.0
47.5°	897.8	889.6	881.4	873.3	865.0	853.5	838.7	823.9	809.0	794.2	783.2
50°	853.5	844.6	835.8	827.0	818.1	806.1	790.9	775.6	760.4	745.1	733.9
52.5°	805.3	796.3	787.2	778.2	769.2	757.4	743.1	728.6	714.3	699.9	687.8
55°	734.3	725.8	717.2	708.6	700.1	688.3	673.3	658.4	643.4	628.4	616.4
57.5°	662.5	653.4	644.3	635.1	626.0	614.2	599.8	585.3	570.9	556.4	544.7
60°	616.4	607.0	597.6	588.3	578.9	566.9	552.5	538.1	523.6	509.2	497.4
62.5°	567.2	558.3	549.4	540.4	531.5	519.7	505.1	490.4	475.7	461.0	450.1
65°	497.1	488.0	478.9	469.8	460.7	449.2	435.0	420.8	406.6	392.4	381.7
67.5°	427.6	418.5	409.4	400.3	391.2	379.9	366.2	352.7	339.1	325.5	315.8
70°	380.4	371.3	362.2	353.1	344.0	332.8	319.4	306.0	292.7	279.3	271.0
72.5°	334.2	325.3	316.4	307.6	298.6	287.9	275.4	262.9	250.4	237.9	230.2
75°	264.8	256.8	248.8	240.8	232.7	223.1	211.9	200.6	189.4	178.2	172.3
77.5°	196.0	189.6	183.2	176.7	170.3	162.6	153.6	144.6	135.6	126.6	122.5
80°	156.5	150.1	143.7	137.2	130.8	123.9	116.4	108.9	101.4	93.9	91.5
82.5°	118.0	112.2	106.4	100.7	94.9	89.4	84.3	79.1	74.0	68.8	67.8
85°	66.2	61.3	56.5	51.7	46.9	43.9	42.5	41.2	39.9	38.5	38.3
87.5°	22.2	20.9	19.5	18.2	16.9	16.1	16.0	15.9	15.8	15.7	15.9
90°	0.4	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.5	7.0
92.5°	9.8	10.3	10.8	11.3	11.8	12.4	13.2	14.0	14.7	15.5	16.1
95°	26.3	26.5	26.7	26.8	27.0	27.6	28.4	29.3	30.2	31.1	31.7
97.5°	43.6	43.7	43.8	43.9	44.0	44.6	45.8	47.1	48.3	49.6	50.1
100°	56.6	56.6	56.6	56.6	56.6	57.2	58.3	59.5	60.6	61.8	62.7
102.5°	70.4	70.8	71.2	71.6	72.0	72.4	73.0	73.6	74.2	74.7	75.6
105°	92.1	92.6	93.0	93.5	94.0	94.4	95.0	95.5	96.0	96.6	97.1
107.5°	116.1	116.5	117.0	117.4	117.9	118.3	118.7	119.1	119.6	119.9	120.2
110°	132.6	133.0	133.5	133.9	134.4	134.7	135.0	135.3	135.5	135.8	136.1



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	149.4	149.6	149.8	150.1	150.3	150.6	151.0	151.3	151.6	151.9	152.1
115°	174.2	174.5	175.0	175.3	175.7	175.9	176.1	176.3	176.5	176.6	176.6
117.5°	199.1	199.2	199.4	199.6	199.7	199.9	200.1	200.2	200.4	200.5	200.6
120°	214.6	215.1	215.5	216.0	216.4	216.7	216.8	216.9	217.0	217.0	217.0
122.5°	231.4	231.6	231.8	231.9	232.0	232.3	232.5	232.7	233.0	233.2	233.1
125°	254.2	254.8	255.3	255.8	256.4	256.7	256.8	256.9	257.0	257.1	256.9
127.5°	278.5	278.7	279.1	279.4	279.7	279.9	280.0	280.1	280.2	280.4	280.3
130°	293.0	293.5	293.9	294.4	294.8	295.2	295.3	295.5	295.7	295.9	295.8
132.5°	307.6	308.3	309.1	309.8	310.5	310.9	310.9	310.8	310.8	310.7	310.6
135°	330.6	331.2	331.7	332.3	332.8	333.1	333.1	333.2	333.3	333.4	333.4
137.5°	352.2	352.8	353.3	353.8	354.4	354.7	354.9	355.1	355.3	355.5	355.6
140°	366.1	366.6	367.0	367.5	367.9	368.4	368.6	368.9	369.2	369.4	369.6
142.5°	380.0	380.4	380.8	381.2	381.6	381.9	382.3	382.6	383.0	383.3	383.4
145°	400.6	400.9	401.3	401.6	402.0	402.3	402.5	402.8	403.1	403.3	403.3
147.5°	419.5	419.6	419.8	420.0	420.3	420.4	420.6	420.9	421.1	421.3	421.5
150°	432.0	431.9	431.9	431.8	431.7	431.9	432.2	432.6	432.9	433.3	433.3
152.5°	442.4	442.6	442.6	442.7	442.9	443.0	443.2	443.4	443.4	443.6	443.8
155°	458.3	458.3	458.3	458.3	458.3	458.3	458.4	458.5	458.6	458.7	459.1
157.5°	472.5	472.3	472.2	472.0	471.7	471.7	471.8	471.9	472.0	472.1	472.4
160°	481.0	480.7	480.4	480.1	479.8	479.7	479.8	479.9	480.0	480.1	480.5
162.5°	488.4	488.2	488.0	487.8	487.6	487.5	487.5	487.5	487.6	487.6	488.0
165°	498.3	498.1	497.9	497.8	497.6	497.6	497.7	497.8	497.8	497.9	498.3
167.5°	506.8	506.4	506.0	505.7	505.3	505.2	505.2	505.2	505.2	505.2	505.7
170°	511.2	510.9	510.5	510.1	509.8	509.6	509.6	509.6	509.6	509.6	510.1
172.5°	514.5	514.2	513.8	513.4	513.1	512.9	512.9	512.9	512.9	512.9	513.4
175°	518.2	517.7	517.4	517.0	516.7	516.5	516.5	516.5	516.5	516.5	517.0
177.5°	520.0	519.7	519.4	519.2	518.8	518.6	518.6	518.5	518.4	518.4	518.8
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1588.5	1590.6	1592.8	1593.7	1593.5	1593.3	1593.0	1592.9
5°	1578.7	1581.4	1584.0	1585.1	1584.6	1584.0	1583.5	1583.0
7.5°	1559.1	1560.9	1562.8	1563.4	1562.8	1562.3	1561.7	1561.0
10°	1542.5	1543.3	1544.1	1544.1	1543.3	1542.5	1541.7	1540.9
12.5°	1518.9	1519.5	1520.1	1519.7	1518.5	1517.3	1516.1	1514.8
15°	1480.2	1479.9	1479.6	1478.3	1475.9	1473.5	1471.1	1468.6
17.5°	1431.7	1430.4	1429.1	1427.5	1425.4	1423.4	1421.5	1419.5
20°	1396.2	1394.8	1393.5	1391.6	1389.2	1386.8	1384.4	1382.0
22.5°	1360.8	1358.2	1355.6	1353.3	1351.3	1349.3	1347.3	1345.3
25°	1302.8	1299.3	1295.8	1292.6	1289.7	1286.7	1283.8	1280.9
27.5°	1240.0	1235.2	1230.3	1226.5	1223.6	1220.8	1217.9	1215.1
30°	1195.1	1188.9	1182.8	1178.5	1176.1	1173.7	1171.3	1168.9
32.5°	1151.5	1144.6	1137.8	1132.9	1129.9	1126.9	1123.7	1120.7
35°	1083.5	1075.8	1068.0	1062.3	1058.5	1054.8	1051.1	1047.3
37.5°	1012.5	1003.3	993.9	987.5	983.8	980.2	976.5	972.9
40°	965.5	955.4	945.2	938.5	935.3	932.1	928.9	925.7
42.5°	919.3	909.5	899.7	892.5	887.8	883.2	878.4	873.7
45°	845.3	834.6	823.9	816.5	812.5	808.5	804.5	800.5
47.5°	772.2	761.2	750.2	742.4	738.0	733.5	729.2	724.7
50°	722.6	711.4	700.2	692.6	688.6	684.6	680.6	676.5
52.5°	675.7	663.6	651.5	643.5	639.4	635.4	631.4	627.4
55°	604.3	592.3	580.2	572.0	567.8	563.5	559.2	554.9
57.5°	532.9	521.1	509.3	501.5	497.8	493.9	490.1	486.3
60°	485.6	473.9	462.1	454.2	450.2	446.2	442.2	438.2
62.5°	439.3	428.3	417.4	409.9	405.9	401.9	397.9	393.9
65°	371.0	360.3	349.6	342.2	338.2	334.2	330.2	326.2
67.5°	305.9	296.1	286.3	279.8	276.6	273.4	270.2	267.0
70°	262.7	254.4	246.1	240.3	237.1	233.9	230.7	227.5
72.5°	222.6	214.9	207.2	202.3	200.2	198.0	195.9	193.8
75°	166.4	160.5	154.6	150.7	148.8	147.0	145.1	143.2
77.5°	118.4	114.3	110.1	107.4	106.0	104.6	103.3	101.8
80°	89.1	86.7	84.3	82.8	82.2	81.7	81.1	80.6
82.5°	66.6	65.5	64.4	63.7	63.3	63.0	62.7	62.3
85°	38.0	37.7	37.5	37.2	36.9	36.6	36.4	36.1
87.5°	16.0	16.1	16.1	16.1	15.9	15.8	15.6	15.4
90°	7.4	7.8	8.3	8.6	8.9	9.2	9.5	9.7
92.5°	16.7	17.3	17.9	18.3	18.5	18.6	18.9	19.1
95°	32.4	33.0	33.6	34.1	34.2	34.4	34.6	34.8
97.5°	50.7	51.4	51.9	52.3	52.3	52.5	52.6	52.7
100°	63.5	64.3	65.1	65.5	65.7	65.9	66.1	66.3
102.5°	76.5	77.4	78.3	78.8	79.1	79.4	79.6	79.9
105°	97.6	98.2	98.7	99.2	99.4	99.7	100.0	100.2
107.5°	120.5	120.7	121.0	121.2	121.2	121.1	121.1	121.1
110°	136.3	136.6	136.9	137.0	136.9	136.8	136.7	136.6



TEST NUMBER: P333703-940

CATALOG NUMBER: S125RDIW-S1090D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	152.2	152.3	152.5	152.5	152.3	152.1	151.9	151.8
115°	176.5	176.4	176.3	176.2	176.1	176.0	175.9	175.8
117.5°	200.7	200.7	200.8	200.7	200.4	200.0	199.6	199.2
120°	217.0	217.0	217.0	216.9	216.5	216.2	215.8	215.4
122.5°	233.1	233.0	232.9	232.7	232.5	232.2	231.8	231.6
125°	256.7	256.5	256.4	256.2	256.1	256.0	255.9	255.8
127.5°	280.2	280.1	280.0	279.8	279.6	279.5	279.3	279.1
130°	295.7	295.6	295.5	295.3	295.2	295.0	294.8	294.6
132.5°	310.5	310.4	310.3	310.2	310.0	309.7	309.4	309.2
135°	333.4	333.4	333.4	333.2	332.9	332.5	332.2	331.8
137.5°	355.7	355.8	356.0	355.8	355.3	354.9	354.4	353.9
140°	369.8	370.0	370.1	370.0	369.5	369.1	368.6	368.2
142.5°	383.5	383.6	383.7	383.5	383.1	382.6	382.2	381.7
145°	403.3	403.3	403.3	403.2	403.0	402.7	402.4	402.2
147.5°	421.7	422.0	422.1	422.0	421.3	420.7	420.1	419.5
150°	433.3	433.3	433.3	433.2	433.0	432.8	432.7	432.5
152.5°	444.1	444.3	444.4	444.4	444.1	443.8	443.4	443.1
155°	459.4	459.8	460.1	460.1	459.7	459.2	458.8	458.3
157.5°	472.8	473.1	473.5	473.4	472.8	472.2	471.6	471.0
160°	480.9	481.3	481.6	481.5	481.1	480.6	480.2	479.7
162.5°	488.5	488.8	489.3	489.3	488.7	488.2	487.7	487.1
165°	498.6	499.0	499.4	499.3	498.7	498.2	497.7	497.1
167.5°	506.2	506.8	507.3	507.3	506.7	506.1	505.6	505.1
170°	510.7	511.2	511.8	511.8	511.1	510.5	509.9	509.3
172.5°	514.0	514.5	515.1	515.1	514.4	513.9	513.4	512.8
175°	517.5	518.2	518.7	518.6	518.0	517.4	516.7	516.1
177.5°	519.2	519.7	520.1	520.0	519.6	519.1	518.5	518.1
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3

(END OF REPORT)