

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333722-940

Luminaire Tested: **S125RDIW-S1270D470U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333722-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D470U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6020.9 lumens
Efficiency: N/A
Efficacy: 114.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

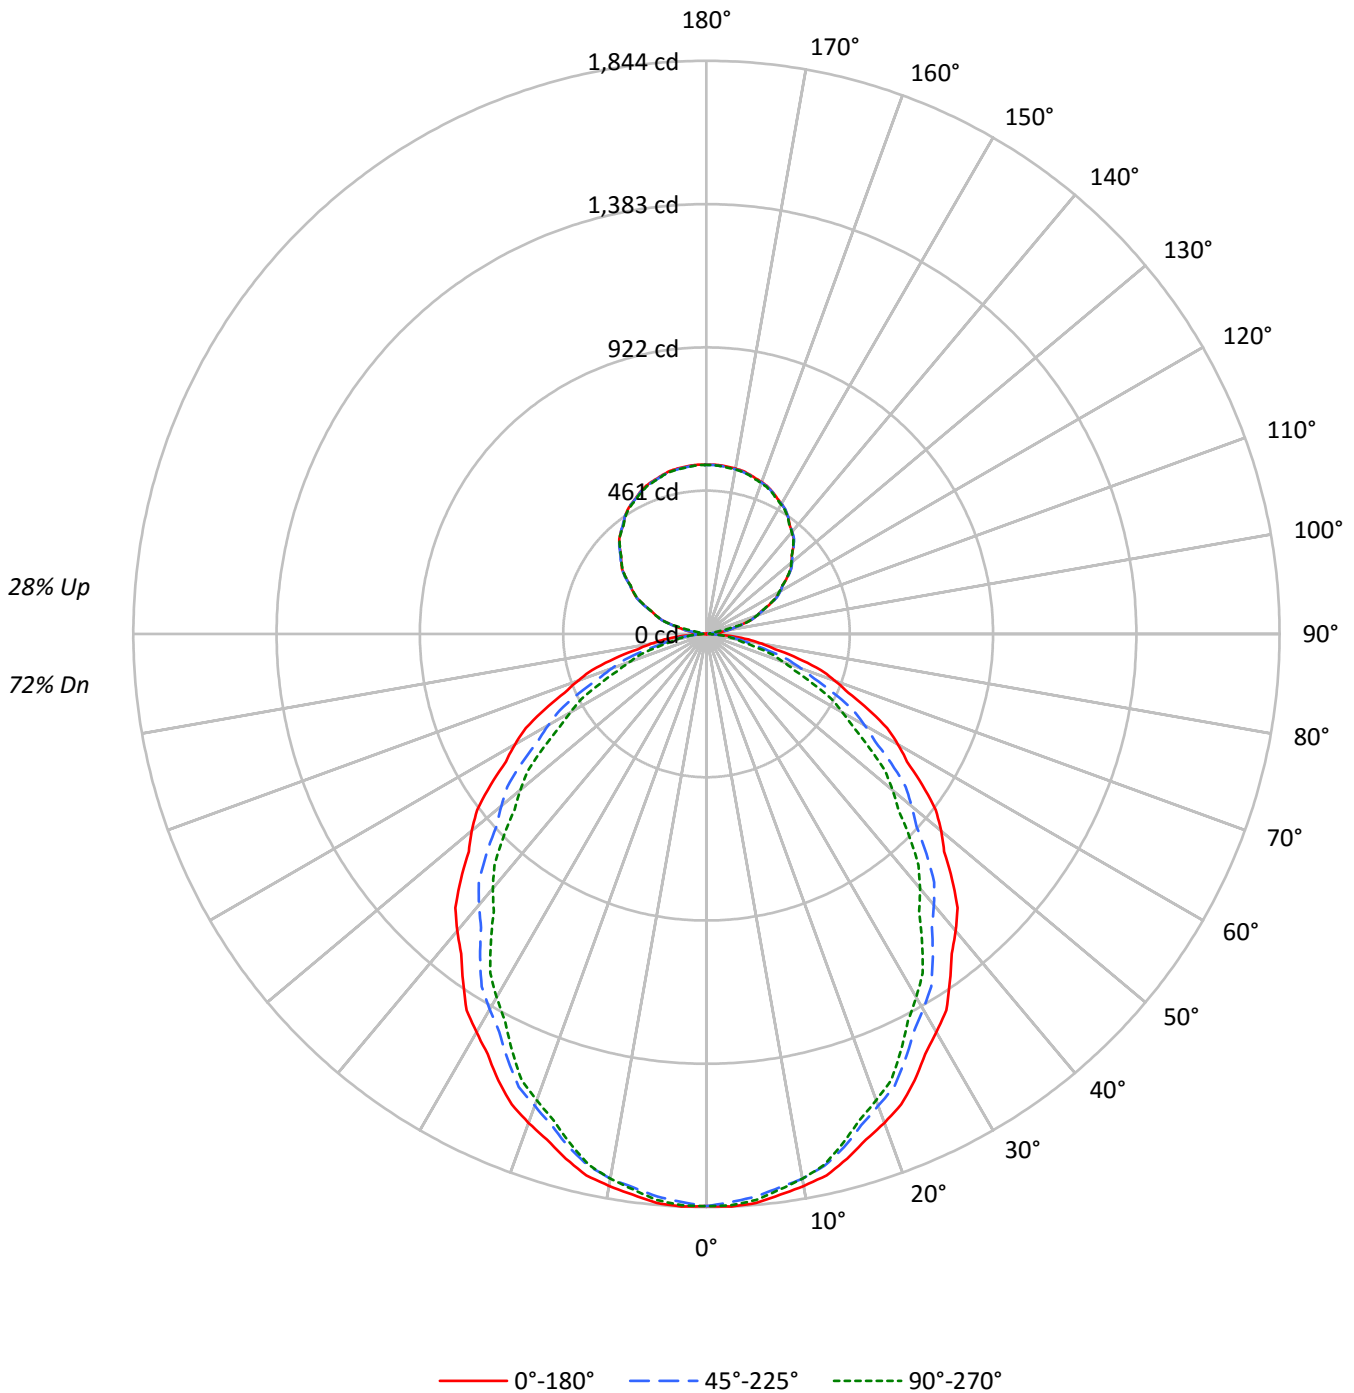



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	72
1	103	99	95	91	98	94	90	87	85	82	80	76	74	72	68	67	65	62
2	94	87	80	75	89	82	77	72	74	70	66	67	64	61	60	58	56	52
3	86	76	69	63	81	73	66	61	66	61	56	60	55	52	54	50	48	44
4	79	68	60	54	75	65	57	52	59	53	48	53	49	45	48	44	41	38
5	73	61	52	46	69	58	51	45	53	47	42	48	43	39	44	39	36	33
6	67	55	46	41	64	52	45	39	48	42	37	44	38	34	40	35	32	29
7	62	50	42	36	59	48	40	35	44	37	33	40	35	31	36	32	29	26
8	58	45	37	32	55	43	36	31	40	34	29	37	31	27	33	29	26	24
9	54	42	34	29	51	40	33	28	37	31	26	34	29	25	31	27	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11889	11889	11889
5°	11916	11780	11852
10°	11825	11671	11671
15°	11685	11433	11340
20°	11504	11103	10970
25°	11294	10779	10541
30°	11032	10399	10068
35°	10764	10008	9536
40°	10514	9599	9014
45°	10209	9143	8444
50°	9904	8647	7850
55°	9549	8172	7218
60°	9195	7596	6536
65°	8775	6927	5757
70°	8295	6090	4962
75°	7633	5133	4127
80°	6721	4032	3466
85°	5669	3298	3090



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.1	2.9
10°-20°	483.7	8.0
20°-30°	701.4	11.7
30°-40°	799.4	13.3
40°-50°	779.2	12.9
50°-60°	655.9	10.9
60°-70°	459.8	7.6
70°-80°	236.3	3.9
80°-90°	60.8	1.0
90°-100°	19.8	0.3
100°-110°	121.9	2.0
110°-120°	221.0	3.7
120°-130°	283.7	4.7
130°-140°	305.1	5.1
140°-150°	286.4	4.8
150°-160°	231.7	3.8
160°-170°	149.8	2.5
170°-180°	51.7	0.9
0°-30°	1358.2	22.6
0°-40°	2157.6	35.8
0°-60°	3592.8	59.7
0°-90°	4349.8	72.2
90°-120°	362.7	6.0
90°-150°	1237.9	20.6
90°-180°	1671.0	27.8
0°-180°	6020.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1841	1841	1841	1841	1841	
5°	1838	1832	1817	1830	1828	174
15°	1748	1738	1710	1708	1696	492
25°	1585	1562	1513	1495	1479	729
35°	1365	1330	1269	1230	1210	854
45°	1118	1075	1001	947	924	862
55°	848	802	726	665	641	758
65°	574	525	453	400	377	569
75°	306	263	206	176	165	324
85°	76	52	44	43	42	86
90°	0	4	6	8	10	4
95°	23	21	6	8	8	29
105°	119	120	120	120	120	126
115°	223	225	225	223	221	221
125°	317	319	320	318	317	283
135°	395	397	396	396	393	304
145°	458	459	459	459	457	286
155°	504	502	503	504	501	232
165°	532	530	530	532	529	150
175°	544	542	542	545	542	52
180°	544	544	544	544	544	



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8
2.5°	1844.1	1843.3	1842.5	1841.8	1841.1	1839.5	1837.0	1834.5	1832.1	1829.6	1832.1
5°	1838.0	1836.7	1835.5	1834.2	1833.0	1830.7	1827.3	1823.9	1820.5	1817.1	1820.2
7.5°	1819.9	1818.7	1817.6	1816.3	1815.2	1812.6	1808.5	1804.4	1800.4	1796.3	1798.4
10°	1803.2	1802.2	1801.3	1800.5	1799.5	1796.9	1792.5	1788.2	1783.9	1779.6	1780.5
12.5°	1784.3	1783.2	1781.9	1780.7	1779.6	1776.1	1770.3	1764.5	1758.6	1752.8	1753.5
15°	1747.6	1745.7	1743.9	1742.0	1740.2	1736.0	1729.5	1723.1	1716.5	1710.0	1709.8
17.5°	1706.1	1703.3	1700.5	1697.6	1694.8	1689.3	1681.1	1672.9	1664.8	1656.6	1655.1
20°	1673.9	1670.8	1667.7	1664.6	1661.5	1655.0	1645.2	1635.3	1625.4	1615.5	1614.0
22.5°	1638.3	1635.2	1632.1	1629.1	1625.9	1619.3	1608.8	1598.5	1588.0	1577.7	1574.7
25°	1584.9	1580.3	1575.7	1571.0	1566.4	1558.4	1546.9	1535.5	1524.0	1512.6	1508.6
27.5°	1523.8	1518.1	1512.5	1506.9	1501.3	1492.4	1480.1	1467.8	1455.6	1443.4	1437.8
30°	1479.3	1473.4	1467.5	1461.7	1455.8	1446.4	1433.3	1420.4	1407.4	1394.5	1387.3
32.5°	1435.9	1429.1	1422.2	1415.3	1408.5	1398.4	1385.2	1372.0	1358.7	1345.5	1337.7
35°	1365.3	1357.8	1350.4	1343.0	1335.6	1324.9	1311.0	1297.2	1283.3	1269.4	1260.3
37.5°	1296.0	1287.0	1278.0	1269.0	1259.9	1248.2	1233.9	1219.6	1205.2	1190.9	1180.2
40°	1247.1	1237.8	1228.5	1219.2	1210.1	1197.9	1183.1	1168.3	1153.4	1138.6	1126.9
42.5°	1196.0	1186.4	1176.9	1167.3	1157.9	1145.4	1130.2	1114.8	1099.5	1084.1	1072.9
45°	1117.8	1108.8	1099.8	1090.9	1081.9	1069.0	1052.0	1035.0	1018.0	1001.0	988.6
47.5°	1036.9	1027.4	1018.0	1008.5	999.1	985.8	968.7	951.5	934.4	917.3	904.6
50°	985.7	975.5	965.3	955.1	944.9	931.0	913.4	895.8	878.2	860.6	847.6
52.5°	930.1	919.6	909.2	898.8	888.3	874.8	858.2	841.6	824.9	808.3	794.3
55°	848.1	838.2	828.3	818.4	808.5	795.0	777.7	760.4	743.1	725.8	711.9
57.5°	765.2	754.7	744.0	733.5	722.9	709.4	692.7	675.9	659.2	642.6	629.0
60°	711.9	701.0	690.2	679.4	668.6	654.8	638.1	621.4	604.8	588.1	574.5
62.5°	655.1	644.8	634.5	624.1	613.9	600.2	583.3	566.3	549.4	532.4	519.9
65°	574.2	563.7	553.2	542.7	532.2	518.7	502.4	486.0	469.6	453.3	440.9
67.5°	493.8	483.3	472.8	462.4	451.8	438.7	423.0	407.3	391.6	375.9	364.6
70°	439.3	428.8	418.3	407.8	397.3	384.3	368.9	353.5	338.0	322.5	313.0
72.5°	385.9	375.7	365.4	355.2	344.9	332.5	318.1	303.6	289.2	274.7	265.9
75°	305.9	296.6	287.3	278.0	268.8	257.7	244.7	231.8	218.7	205.7	198.9
77.5°	226.3	218.9	211.5	204.1	196.7	187.8	177.4	167.0	156.7	146.2	141.5
80°	180.7	173.3	165.9	158.5	151.1	143.0	134.4	125.7	117.1	108.4	105.7
82.5°	136.3	129.6	122.9	116.2	109.6	103.3	97.3	91.4	85.4	79.5	78.2
85°	76.5	70.9	65.4	59.7	54.2	50.6	49.1	47.6	46.0	44.5	44.1
87.5°	25.7	24.1	22.5	20.9	19.4	18.5	18.4	18.2	18.1	18.0	18.1
90°	0.4	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.4	6.9
92.5°	6.2	5.7	5.2	4.7	4.2	4.2	4.8	5.4	5.9	6.4	6.9
95°	23.0	22.7	22.5	22.2	21.9	20.1	16.7	13.3	9.9	6.4	6.9
97.5°	48.0	48.5	49.0	49.5	49.9	46.8	40.0	33.3	26.6	19.9	17.3
100°	67.3	67.7	67.9	68.2	68.5	68.8	69.1	69.5	69.8	70.2	56.8
102.5°	87.0	87.4	87.7	88.1	88.5	88.7	88.9	89.1	89.3	89.5	87.0
105°	118.6	119.0	119.3	119.7	120.0	120.2	120.2	120.2	120.2	120.2	120.2
107.5°	151.3	151.3	151.3	151.3	151.3	151.4	151.6	151.8	151.9	152.1	152.2
110°	172.6	172.6	172.6	172.6	172.6	172.7	172.9	173.1	173.3	173.4	173.2



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	192.7	192.9	193.1	193.3	193.5	193.7	193.8	193.9	194.0	194.1	193.8
115°	222.7	223.1	223.6	224.0	224.4	224.7	224.8	224.9	225.0	225.1	224.7
117.5°	253.8	253.7	253.7	253.7	253.7	253.9	254.1	254.5	254.9	255.2	254.8
120°	273.1	273.0	273.0	272.9	272.8	272.9	273.1	273.4	273.7	273.9	273.8
122.5°	290.3	290.5	290.9	291.2	291.6	291.8	291.9	292.0	292.2	292.3	292.1
125°	316.6	317.3	317.9	318.5	319.1	319.5	319.5	319.5	319.5	319.5	319.1
127.5°	341.9	342.4	342.9	343.3	343.8	343.9	343.8	343.8	343.8	343.7	343.5
130°	357.4	357.8	358.3	358.7	359.2	359.4	359.5	359.6	359.7	359.8	359.5
132.5°	372.9	373.4	374.0	374.4	375.0	375.1	375.0	374.8	374.5	374.3	374.3
135°	394.9	395.5	396.0	396.5	397.1	397.3	397.1	396.9	396.7	396.5	396.4
137.5°	415.2	415.6	416.1	416.6	417.1	417.2	417.1	416.9	416.7	416.5	416.6
140°	428.4	428.6	428.7	428.9	429.1	429.2	429.1	429.0	428.9	428.8	429.0
142.5°	440.3	440.5	440.6	440.7	440.8	440.9	441.0	441.1	441.3	441.4	441.4
145°	457.9	458.1	458.3	458.4	458.6	458.7	458.7	458.7	458.7	458.7	458.8
147.5°	473.2	473.1	473.1	473.1	473.1	473.1	473.2	473.3	473.4	473.5	473.6
150°	482.9	482.7	482.5	482.3	482.1	482.1	482.3	482.5	482.7	482.9	483.0
152.5°	492.2	491.9	491.4	491.1	490.6	490.5	490.7	490.9	491.1	491.2	491.4
155°	504.3	503.7	503.2	502.7	502.1	501.9	502.1	502.3	502.5	502.7	502.9
157.5°	513.5	513.2	512.9	512.6	512.2	512.1	512.1	512.1	512.1	512.2	512.5
160°	520.0	519.4	518.9	518.4	517.8	517.6	517.7	517.8	517.9	518.0	518.4
162.5°	525.1	524.6	524.1	523.5	523.0	522.8	522.9	523.0	523.1	523.2	523.6
165°	532.1	531.5	531.0	530.5	529.9	529.7	529.8	529.9	529.9	530.0	530.6
167.5°	537.3	536.7	536.2	535.6	535.0	534.8	534.8	534.9	535.0	535.1	535.8
170°	540.2	539.6	538.9	538.2	537.6	537.3	537.4	537.5	537.6	537.7	538.4
172.5°	542.1	541.4	540.8	540.2	539.6	539.4	539.5	539.7	539.8	540.0	540.6
175°	544.2	543.7	543.1	542.6	542.1	541.8	541.9	542.0	542.1	542.2	542.9
177.5°	545.2	544.7	544.3	543.9	543.4	543.2	543.3	543.4	543.5	543.6	544.0
180°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8
2.5°	1834.5	1837.0	1839.5	1840.6	1840.4	1840.1	1839.9	1839.6
5°	1823.3	1826.4	1829.4	1830.7	1830.1	1829.4	1828.8	1828.2
7.5°	1800.5	1802.8	1804.9	1805.6	1804.9	1804.3	1803.6	1803.0
10°	1781.4	1782.4	1783.2	1783.2	1782.4	1781.4	1780.5	1779.6
12.5°	1754.3	1754.9	1755.6	1755.2	1753.8	1752.4	1751.0	1749.5
15°	1709.4	1709.1	1708.8	1707.3	1704.5	1701.7	1698.9	1696.1
17.5°	1653.6	1652.0	1650.5	1648.6	1646.3	1644.0	1641.7	1639.4
20°	1612.4	1610.9	1609.4	1607.1	1604.4	1601.6	1598.8	1596.1
22.5°	1571.6	1568.6	1565.6	1562.9	1560.7	1558.4	1556.0	1553.8
25°	1504.6	1500.6	1496.6	1492.8	1489.4	1486.0	1482.6	1479.3
27.5°	1432.2	1426.6	1420.9	1416.5	1413.2	1409.9	1406.6	1403.4
30°	1380.3	1373.1	1366.0	1361.1	1358.3	1355.5	1352.7	1350.0
32.5°	1329.8	1322.0	1314.1	1308.4	1304.9	1301.4	1297.9	1294.3
35°	1251.4	1242.4	1233.5	1226.8	1222.5	1218.2	1213.9	1209.5
37.5°	1169.4	1158.7	1147.9	1140.4	1136.2	1132.0	1127.8	1123.6
40°	1115.2	1103.4	1091.7	1084.0	1080.2	1076.6	1072.8	1069.2
42.5°	1061.7	1050.4	1039.2	1030.8	1025.4	1019.9	1014.5	1009.1
45°	976.2	963.9	951.5	943.1	938.4	933.8	929.2	924.5
47.5°	891.9	879.1	866.4	857.5	852.3	847.2	842.0	837.0
50°	834.6	821.6	808.7	799.9	795.2	790.6	786.0	781.3
52.5°	780.3	766.4	752.4	743.2	738.5	733.9	729.2	724.6
55°	697.9	684.0	670.1	660.7	655.8	650.8	645.9	641.0
57.5°	615.4	601.8	588.2	579.3	574.8	570.4	566.1	561.7
60°	560.9	547.3	533.7	524.6	520.0	515.3	510.7	506.0
62.5°	507.3	494.6	482.1	473.4	468.8	464.1	459.5	454.9
65°	428.6	416.2	403.8	395.3	390.7	386.0	381.4	376.7
67.5°	353.3	342.0	330.7	323.2	319.5	315.8	312.1	308.4
70°	303.4	293.8	284.3	277.6	273.8	270.2	266.4	262.8
72.5°	257.1	248.3	239.3	233.7	231.2	228.8	226.3	223.8
75°	192.2	185.4	178.6	174.1	171.9	169.8	167.6	165.4
77.5°	136.7	132.0	127.2	124.0	122.4	120.8	119.2	117.6
80°	102.9	100.1	97.3	95.6	95.0	94.3	93.8	93.2
82.5°	77.0	75.6	74.4	73.5	73.1	72.8	72.4	72.1
85°	43.9	43.6	43.2	43.0	42.6	42.4	42.0	41.7
87.5°	18.2	18.3	18.4	18.3	18.1	17.9	17.7	17.5
90°	7.3	7.8	8.2	8.6	8.9	9.2	9.5	9.7
92.5°	7.3	7.8	8.2	8.6	8.6	8.8	8.9	9.0
95°	7.3	7.8	8.2	8.5	8.5	8.5	8.5	8.5
97.5°	14.8	12.3	9.7	8.5	8.5	8.5	8.5	8.5
100°	43.5	30.1	16.8	9.9	9.5	9.2	8.8	8.5
102.5°	84.5	81.9	79.5	75.2	69.0	63.0	56.8	50.7
105°	120.2	120.2	120.2	120.2	120.1	120.0	119.9	119.8
107.5°	152.2	152.2	152.2	152.1	151.9	151.6	151.3	151.1
110°	172.9	172.6	172.4	172.3	172.4	172.5	172.5	172.6



TEST NUMBER: P333722-940

CATALOG NUMBER: S125RDIW-S1270D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	193.4	193.1	192.8	192.5	192.4	192.3	192.2	192.0
115°	224.4	224.0	223.6	223.2	222.7	222.1	221.6	221.1
117.5°	254.2	253.8	253.3	253.0	252.7	252.5	252.3	252.1
120°	273.6	273.4	273.2	272.9	272.4	272.0	271.5	271.1
122.5°	291.9	291.8	291.6	291.2	290.7	290.2	289.7	289.2
125°	318.8	318.4	318.1	317.7	317.4	317.2	316.9	316.6
127.5°	343.3	343.1	343.0	342.5	341.8	341.2	340.5	339.8
130°	359.3	359.0	358.7	358.4	357.9	357.5	357.0	356.6
132.5°	374.3	374.2	374.2	373.9	373.4	373.0	372.6	372.1
135°	396.2	396.0	395.8	395.5	394.9	394.4	393.9	393.3
137.5°	416.6	416.7	416.7	416.5	416.0	415.5	415.1	414.6
140°	429.2	429.4	429.5	429.4	428.8	428.3	427.8	427.2
142.5°	441.5	441.5	441.6	441.3	440.8	440.2	439.7	439.2
145°	458.9	459.0	459.1	458.8	458.3	457.7	457.2	456.6
147.5°	473.8	473.9	473.9	473.7	473.1	472.4	471.7	471.1
150°	483.2	483.4	483.6	483.3	482.6	481.9	481.2	480.5
152.5°	491.6	491.8	492.0	491.8	491.1	490.4	489.8	489.2
155°	503.2	503.5	503.7	503.5	502.7	502.0	501.3	500.6
157.5°	512.7	513.0	513.3	513.1	512.4	511.7	511.0	510.2
160°	518.7	519.1	519.4	519.2	518.5	517.8	517.1	516.4
162.5°	524.1	524.7	525.1	525.0	524.2	523.4	522.6	521.8
165°	531.2	531.7	532.3	532.2	531.5	530.7	529.9	529.2
167.5°	536.5	537.1	537.7	537.7	536.8	536.0	535.2	534.4
170°	539.1	539.9	540.6	540.6	539.8	539.0	538.1	537.3
172.5°	541.3	541.9	542.6	542.5	541.7	540.9	540.1	539.3
175°	543.6	544.3	545.0	545.0	544.2	543.4	542.6	541.8
177.5°	544.6	545.0	545.5	545.5	544.9	544.4	543.8	543.2
180°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2

(END OF REPORT)