

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333691-940

Luminaire Tested: **S125RDIW-S850D1050U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333691-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S850D1050U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6139.1 lumens
Efficiency: N/A
Efficacy: 116.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

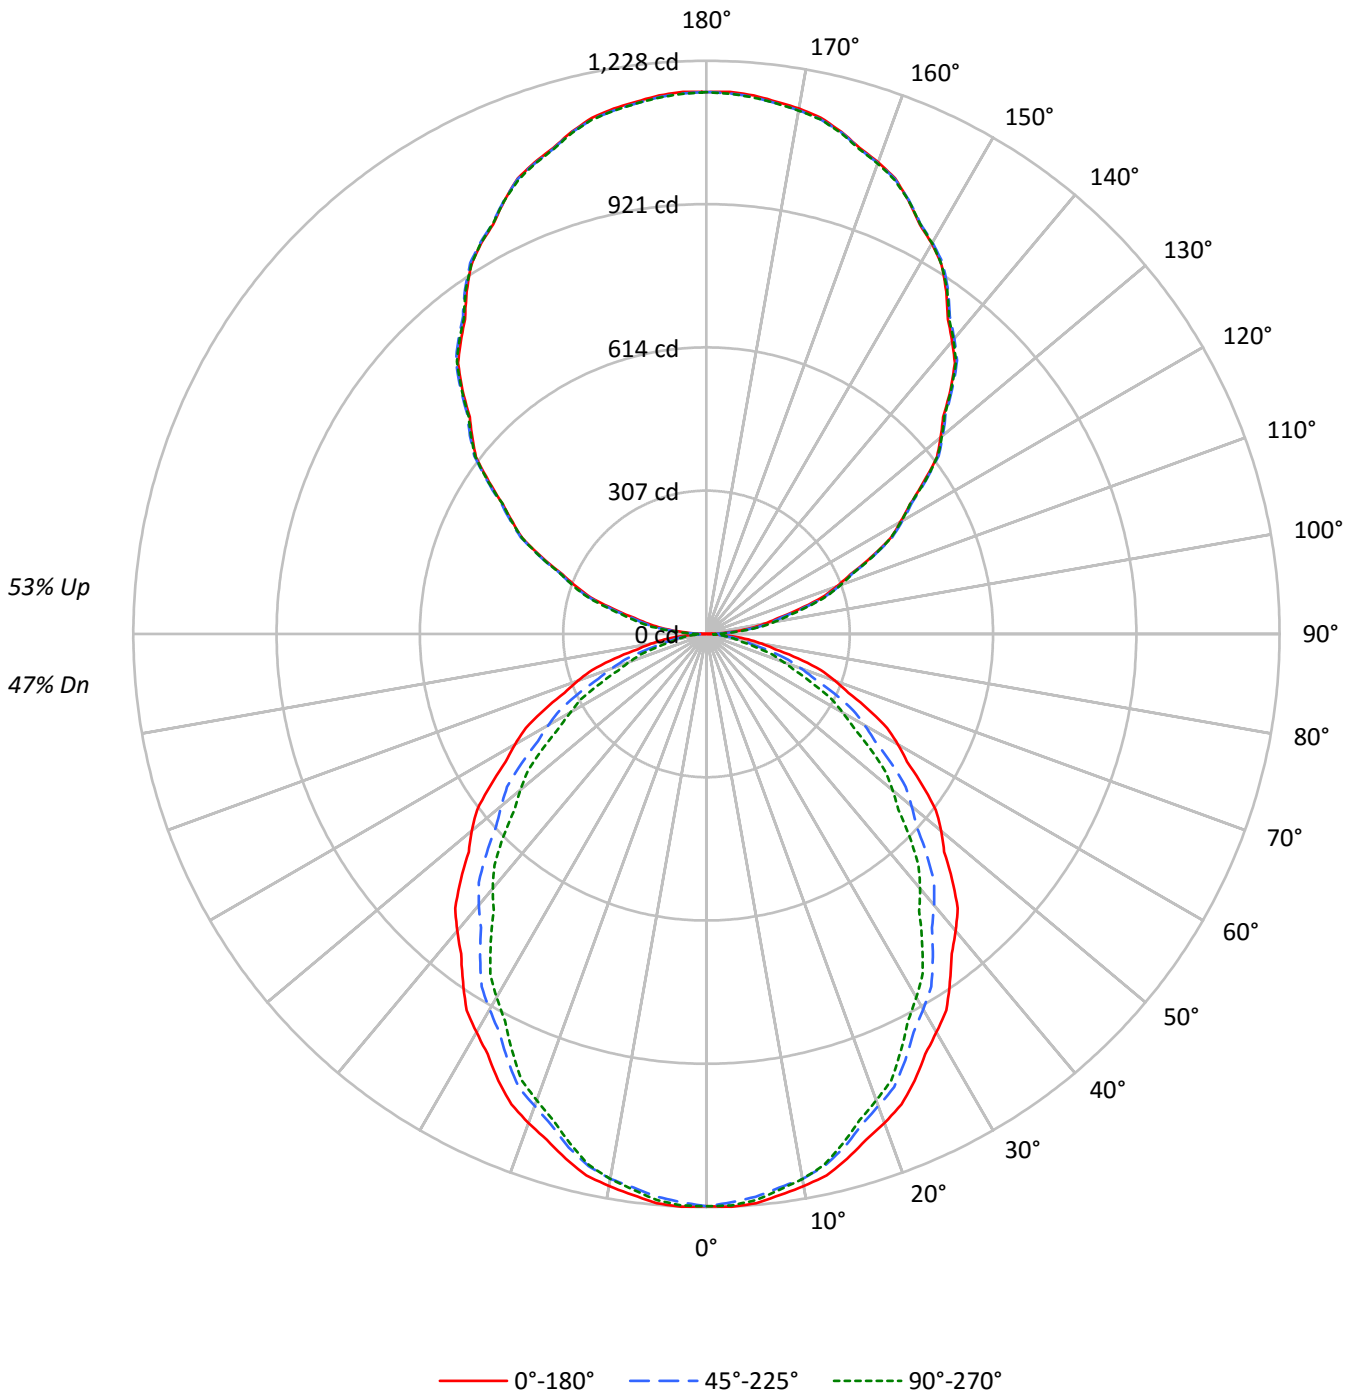



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47
1	97	93	89	86	89	86	83	80	72	70	68	59	58	56	48	47	46	40
2	89	82	76	70	81	75	70	66	63	60	56	52	50	47	42	40	39	34
3	81	72	65	59	74	66	60	55	56	51	47	46	43	40	38	35	33	29
4	74	64	56	50	68	59	52	47	50	45	41	41	38	35	34	31	29	25
5	68	57	49	43	63	53	46	40	45	39	35	37	33	30	30	27	25	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22	19
7	58	46	38	33	53	43	36	31	37	31	27	31	27	23	25	22	20	17
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18	15
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	21	18	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7919	7919	7919
5°	7937	7847	7895
10°	7877	7774	7774
15°	7783	7616	7554
20°	7663	7396	7307
25°	7524	7180	7021
30°	7348	6927	6706
35°	7171	6666	6352
40°	7003	6395	6004
45°	6801	6090	5624
50°	6597	5760	5230
55°	6361	5443	4808
60°	6124	5059	4354
65°	5845	4614	3834
70°	5527	4056	3305
75°	5085	3421	2750
80°	4478	2685	2310
85°	3772	2193	2060



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	1.9
10°-20°	322.2	5.2
20°-30°	467.2	7.6
30°-40°	532.5	8.7
40°-50°	519.1	8.5
50°-60°	436.9	7.1
60°-70°	306.3	5.0
70°-80°	157.4	2.6
80°-90°	42.3	0.7
90°-100°	77.8	1.3
100°-110°	229.6	3.7
110°-120°	388.9	6.3
120°-130°	511.9	8.3
130°-140°	573.6	9.3
140°-150°	562.1	9.2
150°-160°	472.2	7.7
160°-170°	313.9	5.1
170°-180°	109.8	1.8
0°-30°	904.7	14.7
0°-40°	1437.3	23.4
0°-60°	2393.2	39.0
0°-90°	2899.3	47.2
90°-120°	696.4	11.3
90°-150°	2344.0	38.2
90°-180°	3240.0	52.8
0°-180°	6139.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1226	1226	1226	1226	1226	
5°	1224	1220	1210	1219	1218	116
15°	1164	1158	1139	1138	1130	328
25°	1056	1041	1008	996	985	486
35°	910	886	846	819	806	569
45°	745	716	667	631	616	574
55°	565	534	483	443	427	505
65°	382	350	302	266	251	379
75°	204	175	137	118	110	216
85°	51	35	30	29	28	57
90°	1	8	14	19	22	6
95°	59	61	70	76	78	63
105°	206	211	216	221	224	220
115°	389	393	395	394	393	385
125°	568	573	575	573	572	509
135°	739	744	745	745	742	569
145°	895	899	902	902	899	560
155°	1025	1025	1026	1029	1025	472
165°	1114	1112	1113	1116	1111	314
175°	1158	1155	1155	1160	1154	110
180°	1161	1161	1161	1161	1161	



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1228.3	1227.9	1227.4	1226.9	1226.4	1225.3	1223.7	1222.0	1220.4	1218.7	1220.4
5°	1224.3	1223.5	1222.6	1221.8	1221.0	1219.5	1217.2	1215.0	1212.6	1210.4	1212.5
7.5°	1212.3	1211.5	1210.7	1209.9	1209.2	1207.4	1204.7	1201.9	1199.3	1196.5	1197.9
10°	1201.1	1200.5	1199.9	1199.3	1198.6	1196.9	1194.1	1191.1	1188.3	1185.4	1186.0
12.5°	1188.6	1187.8	1187.0	1186.2	1185.4	1183.1	1179.2	1175.4	1171.5	1167.6	1168.1
15°	1164.1	1162.9	1161.6	1160.4	1159.1	1156.4	1152.1	1147.7	1143.4	1139.1	1138.9
17.5°	1136.5	1134.6	1132.7	1130.9	1128.9	1125.2	1119.8	1114.4	1108.9	1103.5	1102.5
20°	1115.0	1112.9	1110.9	1108.8	1106.8	1102.4	1095.9	1089.3	1082.7	1076.1	1075.1
22.5°	1091.3	1089.2	1087.2	1085.1	1083.1	1078.6	1071.7	1064.8	1057.8	1051.0	1048.9
25°	1055.8	1052.7	1049.5	1046.5	1043.4	1038.0	1030.5	1022.8	1015.2	1007.6	1005.0
27.5°	1015.0	1011.3	1007.5	1003.8	1000.1	994.1	986.0	977.8	969.6	961.4	957.7
30°	985.3	981.4	977.6	973.7	969.7	963.4	954.8	946.2	937.5	928.9	924.2
32.5°	956.4	951.9	947.4	942.8	938.2	931.5	922.7	913.9	905.1	896.3	891.1
35°	909.5	904.5	899.6	894.6	889.7	882.5	873.3	864.1	854.8	845.5	839.5
37.5°	863.3	857.3	851.3	845.3	839.3	831.5	822.0	812.3	802.8	793.3	786.1
40°	830.7	824.6	818.3	812.2	806.0	798.0	788.1	778.2	768.4	758.5	750.6
42.5°	796.7	790.3	784.0	777.6	771.2	763.0	752.8	742.6	732.4	722.2	714.7
45°	744.6	738.6	732.6	726.7	720.7	712.0	700.7	689.5	678.1	666.8	658.5
47.5°	690.7	684.4	678.1	671.8	665.5	656.7	645.2	633.8	622.4	611.0	602.5
50°	656.6	649.8	643.0	636.2	629.5	620.2	608.4	596.7	585.0	573.3	564.6
52.5°	619.6	612.6	605.6	598.7	591.7	582.7	571.7	560.6	549.5	538.4	529.1
55°	564.9	558.3	551.8	545.2	538.6	529.5	518.0	506.5	495.0	483.4	474.1
57.5°	509.7	502.7	495.6	488.6	481.6	472.5	461.4	450.2	439.2	428.0	419.0
60°	474.1	467.0	459.8	452.5	445.3	436.2	425.1	413.9	402.9	391.7	382.7
62.5°	436.4	429.5	422.7	415.7	408.8	399.8	388.5	377.3	366.0	354.7	346.3
65°	382.5	375.5	368.5	361.5	354.5	345.5	334.7	323.7	312.8	301.9	293.6
67.5°	329.0	321.9	315.0	308.0	301.0	292.2	281.8	271.3	260.9	250.4	242.9
70°	292.7	285.6	278.7	271.6	264.7	256.0	245.8	235.4	225.2	214.8	208.5
72.5°	257.1	250.2	243.4	236.6	229.8	221.5	211.9	202.2	192.6	183.0	177.1
75°	203.8	197.6	191.4	185.2	179.1	171.7	163.0	154.4	145.7	137.1	132.5
77.5°	150.8	145.8	140.9	136.0	131.0	125.1	118.2	111.3	104.3	97.5	94.3
80°	120.4	115.5	110.5	105.6	100.7	95.3	89.5	83.7	78.0	72.2	70.4
82.5°	90.8	86.3	81.9	77.4	72.9	68.8	64.8	60.9	56.9	53.0	52.1
85°	50.9	47.3	43.5	39.9	36.1	33.7	32.7	31.7	30.7	29.6	29.4
87.5°	17.2	16.4	15.5	14.7	13.9	13.6	13.6	13.7	13.9	14.0	14.2
90°	0.9	2.5	4.1	5.7	7.3	8.8	10.3	11.7	13.0	14.4	15.4
92.5°	21.8	23.0	24.1	25.2	26.4	27.8	29.5	31.2	33.0	34.7	36.0
95°	58.8	59.1	59.6	59.9	60.4	61.5	63.6	65.5	67.6	69.6	71.0
97.5°	97.6	97.7	97.9	98.1	98.3	99.7	102.5	105.2	108.0	110.8	112.1
100°	126.5	126.5	126.5	126.5	126.5	127.8	130.4	133.0	135.6	138.2	140.1
102.5°	157.6	158.4	159.2	160.0	160.8	161.8	163.2	164.5	165.9	167.2	169.2
105°	206.0	207.0	208.0	209.0	210.0	211.2	212.3	213.6	214.7	216.0	217.1
107.5°	259.5	260.5	261.5	262.5	263.5	264.5	265.4	266.4	267.2	268.1	268.8
110°	296.3	297.4	298.4	299.3	300.4	301.2	301.8	302.4	303.0	303.6	304.2



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	333.9	334.5	335.0	335.6	336.0	336.7	337.4	338.2	338.9	339.7	340.0
115°	389.4	390.2	391.0	391.8	392.6	393.2	393.6	394.0	394.4	394.8	394.7
117.5°	445.1	445.4	445.8	446.1	446.6	446.9	447.3	447.6	448.0	448.4	448.5
120°	479.7	480.8	481.8	482.8	483.8	484.4	484.6	484.8	485.0	485.2	485.2
122.5°	517.4	517.7	518.1	518.4	518.8	519.2	519.8	520.3	520.8	521.4	521.2
125°	568.3	569.5	570.7	571.9	573.1	573.8	574.1	574.3	574.4	574.6	574.3
127.5°	622.5	623.2	623.9	624.6	625.3	625.7	626.0	626.2	626.4	626.7	626.5
130°	655.1	656.0	657.1	658.1	659.1	659.8	660.2	660.6	661.0	661.4	661.2
132.5°	687.6	689.2	690.9	692.5	694.2	695.0	694.9	694.8	694.7	694.6	694.5
135°	739.0	740.3	741.5	742.7	744.0	744.6	744.8	745.0	745.2	745.4	745.4
137.5°	787.6	788.7	789.9	791.0	792.2	793.0	793.4	793.9	794.3	794.8	795.0
140°	818.6	819.6	820.6	821.6	822.6	823.4	824.0	824.7	825.2	825.8	826.3
142.5°	849.7	850.5	851.4	852.2	853.1	853.9	854.6	855.4	856.1	856.9	857.1
145°	895.4	896.2	897.0	897.8	898.6	899.3	899.9	900.5	901.2	901.7	901.7
147.5°	937.7	938.2	938.6	939.0	939.4	940.0	940.4	940.8	941.4	941.8	942.4
150°	965.9	965.7	965.5	965.3	965.1	965.4	966.2	967.0	967.8	968.6	968.6
152.5°	989.0	989.3	989.5	989.9	990.2	990.4	990.8	991.0	991.4	991.8	992.2
155°	1024.6	1024.6	1024.6	1024.6	1024.6	1024.7	1024.9	1025.1	1025.3	1025.6	1026.4
157.5°	1056.4	1056.0	1055.5	1055.1	1054.6	1054.5	1054.7	1054.9	1055.2	1055.3	1056.1
160°	1075.2	1074.6	1074.0	1073.4	1072.8	1072.6	1072.8	1073.0	1073.2	1073.4	1074.2
162.5°	1091.8	1091.4	1090.9	1090.5	1090.0	1089.8	1089.9	1089.9	1090.0	1090.0	1091.0
165°	1114.1	1113.7	1113.2	1112.9	1112.4	1112.3	1112.6	1112.8	1112.9	1113.1	1113.9
167.5°	1132.8	1132.0	1131.2	1130.4	1129.6	1129.3	1129.3	1129.3	1129.3	1129.3	1130.4
170°	1143.0	1142.2	1141.4	1140.6	1139.8	1139.3	1139.3	1139.3	1139.3	1139.3	1140.6
172.5°	1150.2	1149.4	1148.6	1147.8	1147.0	1146.6	1146.6	1146.6	1146.6	1146.6	1147.8
175°	1158.3	1157.5	1156.7	1155.9	1155.1	1154.7	1154.7	1154.7	1154.7	1154.7	1155.9
177.5°	1162.5	1161.8	1161.2	1160.6	1159.9	1159.5	1159.3	1159.2	1159.0	1158.9	1159.8
180°	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1222.0	1223.7	1225.3	1226.1	1225.9	1225.7	1225.6	1225.4
5°	1214.5	1216.6	1218.6	1219.5	1219.1	1218.6	1218.3	1217.8
7.5°	1199.4	1200.9	1202.3	1202.7	1202.3	1201.8	1201.4	1201.0
10°	1186.6	1187.2	1187.8	1187.8	1187.2	1186.6	1186.0	1185.4
12.5°	1168.5	1168.9	1169.4	1169.2	1168.2	1167.2	1166.4	1165.4
15°	1138.7	1138.4	1138.3	1137.3	1135.4	1133.5	1131.7	1129.8
17.5°	1101.4	1100.5	1099.4	1098.1	1096.6	1095.1	1093.6	1092.1
20°	1074.1	1073.0	1072.0	1070.6	1068.7	1066.8	1065.0	1063.2
22.5°	1046.9	1044.9	1042.9	1041.1	1039.6	1038.0	1036.5	1035.0
25°	1002.3	999.6	996.9	994.4	992.1	989.9	987.7	985.3
27.5°	954.0	950.2	946.5	943.5	941.4	939.1	937.0	934.8
30°	919.4	914.7	909.9	906.7	904.8	902.9	901.1	899.2
32.5°	885.8	880.6	875.4	871.6	869.2	866.9	864.5	862.2
35°	833.6	827.6	821.6	817.3	814.3	811.5	808.6	805.7
37.5°	779.0	771.8	764.6	759.6	756.9	754.0	751.3	748.5
40°	742.8	735.0	727.2	722.0	719.6	717.1	714.6	712.2
42.5°	707.2	699.7	692.2	686.6	683.1	679.4	675.7	672.2
45°	650.3	642.1	633.8	628.2	625.1	622.1	618.9	615.8
47.5°	594.1	585.6	577.1	571.1	567.8	564.4	560.9	557.5
50°	556.0	547.3	538.7	532.8	529.8	526.6	523.5	520.5
52.5°	519.9	510.5	501.2	495.0	492.0	488.8	485.8	482.7
55°	464.9	455.7	446.4	440.1	436.8	433.5	430.3	427.0
57.5°	409.9	400.9	391.8	385.8	382.9	380.0	377.1	374.2
60°	373.6	364.5	355.5	349.5	346.3	343.3	340.2	337.1
62.5°	337.9	329.5	321.1	315.4	312.3	309.2	306.1	303.0
65°	285.4	277.2	268.9	263.3	260.2	257.2	254.0	250.9
67.5°	235.3	227.8	220.3	215.3	212.9	210.4	207.9	205.5
70°	202.1	195.7	189.3	184.9	182.4	179.9	177.5	175.0
72.5°	171.2	165.3	159.4	155.7	154.0	152.4	150.8	149.1
75°	128.0	123.5	119.0	116.0	114.5	113.1	111.6	110.2
77.5°	91.0	87.9	84.7	82.7	81.6	80.5	79.5	78.4
80°	68.6	66.7	64.8	63.7	63.3	62.9	62.4	62.1
82.5°	51.3	50.4	49.5	49.0	48.7	48.5	48.2	48.0
85°	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8
87.5°	14.4	14.6	14.8	14.9	14.8	14.8	14.7	14.7
90°	16.5	17.5	18.5	19.3	19.9	20.5	21.0	21.7
92.5°	37.4	38.7	40.0	40.8	41.3	41.7	42.2	42.6
95°	72.4	73.7	75.2	76.1	76.5	76.9	77.3	77.7
97.5°	113.4	114.8	116.1	116.8	117.1	117.3	117.6	117.8
100°	141.9	143.7	145.4	146.6	147.0	147.4	147.8	148.2
102.5°	171.1	173.1	175.0	176.3	176.8	177.5	178.0	178.5
105°	218.4	219.5	220.8	221.7	222.3	222.8	223.5	224.1
107.5°	269.4	270.0	270.5	270.9	270.8	270.8	270.7	270.7
110°	304.8	305.4	306.0	306.2	306.0	305.8	305.6	305.4



TEST NUMBER: P333691-940

CATALOG NUMBER: S125RDIW-S850D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	340.3	340.5	340.8	340.8	340.5	340.1	339.7	339.4
115°	394.4	394.2	394.0	393.9	393.6	393.4	393.2	393.1
117.5°	448.6	448.8	449.0	448.6	447.8	447.0	446.2	445.4
120°	485.2	485.2	485.2	484.8	484.0	483.2	482.4	481.6
122.5°	521.0	520.8	520.7	520.3	519.7	519.0	518.4	517.7
125°	573.8	573.5	573.0	572.7	572.6	572.3	572.1	571.9
127.5°	626.2	626.1	625.9	625.6	625.2	624.8	624.4	624.0
130°	661.0	660.8	660.6	660.3	659.9	659.5	659.1	658.7
132.5°	694.2	694.0	693.8	693.5	692.9	692.3	691.8	691.2
135°	745.4	745.4	745.4	745.0	744.2	743.4	742.6	741.8
137.5°	795.2	795.5	795.7	795.3	794.3	793.4	792.3	791.3
140°	826.6	827.1	827.4	827.2	826.2	825.1	824.1	823.1
142.5°	857.4	857.6	857.9	857.5	856.5	855.5	854.5	853.5
145°	901.7	901.7	901.7	901.4	900.8	900.2	899.6	899.0
147.5°	942.8	943.3	943.8	943.3	942.0	940.6	939.2	937.9
150°	968.6	968.6	968.6	968.4	968.0	967.6	967.1	966.8
152.5°	992.7	993.2	993.6	993.5	992.8	992.1	991.3	990.6
155°	1027.2	1028.0	1028.8	1028.6	1027.6	1026.6	1025.6	1024.6
157.5°	1056.9	1057.7	1058.5	1058.3	1056.9	1055.6	1054.3	1053.0
160°	1075.0	1075.8	1076.7	1076.5	1075.5	1074.5	1073.5	1072.5
162.5°	1092.0	1092.9	1093.9	1093.8	1092.6	1091.5	1090.3	1089.1
165°	1114.7	1115.5	1116.3	1116.2	1115.0	1113.7	1112.6	1111.3
167.5°	1131.7	1132.8	1134.1	1134.1	1132.8	1131.6	1130.3	1129.1
170°	1141.7	1143.0	1144.2	1144.1	1142.6	1141.3	1139.9	1138.4
172.5°	1149.0	1150.2	1151.4	1151.4	1150.1	1148.9	1147.6	1146.4
175°	1157.1	1158.3	1159.6	1159.4	1158.1	1156.6	1155.2	1153.8
177.5°	1160.8	1161.8	1162.7	1162.6	1161.5	1160.4	1159.3	1158.2
180°	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0

(END OF REPORT)