

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333694-940

Luminaire Tested: **S125RDIW-S850D1340U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333694-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S850D1340U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7682.7 lumens
Efficiency: N/A
Efficacy: 125.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

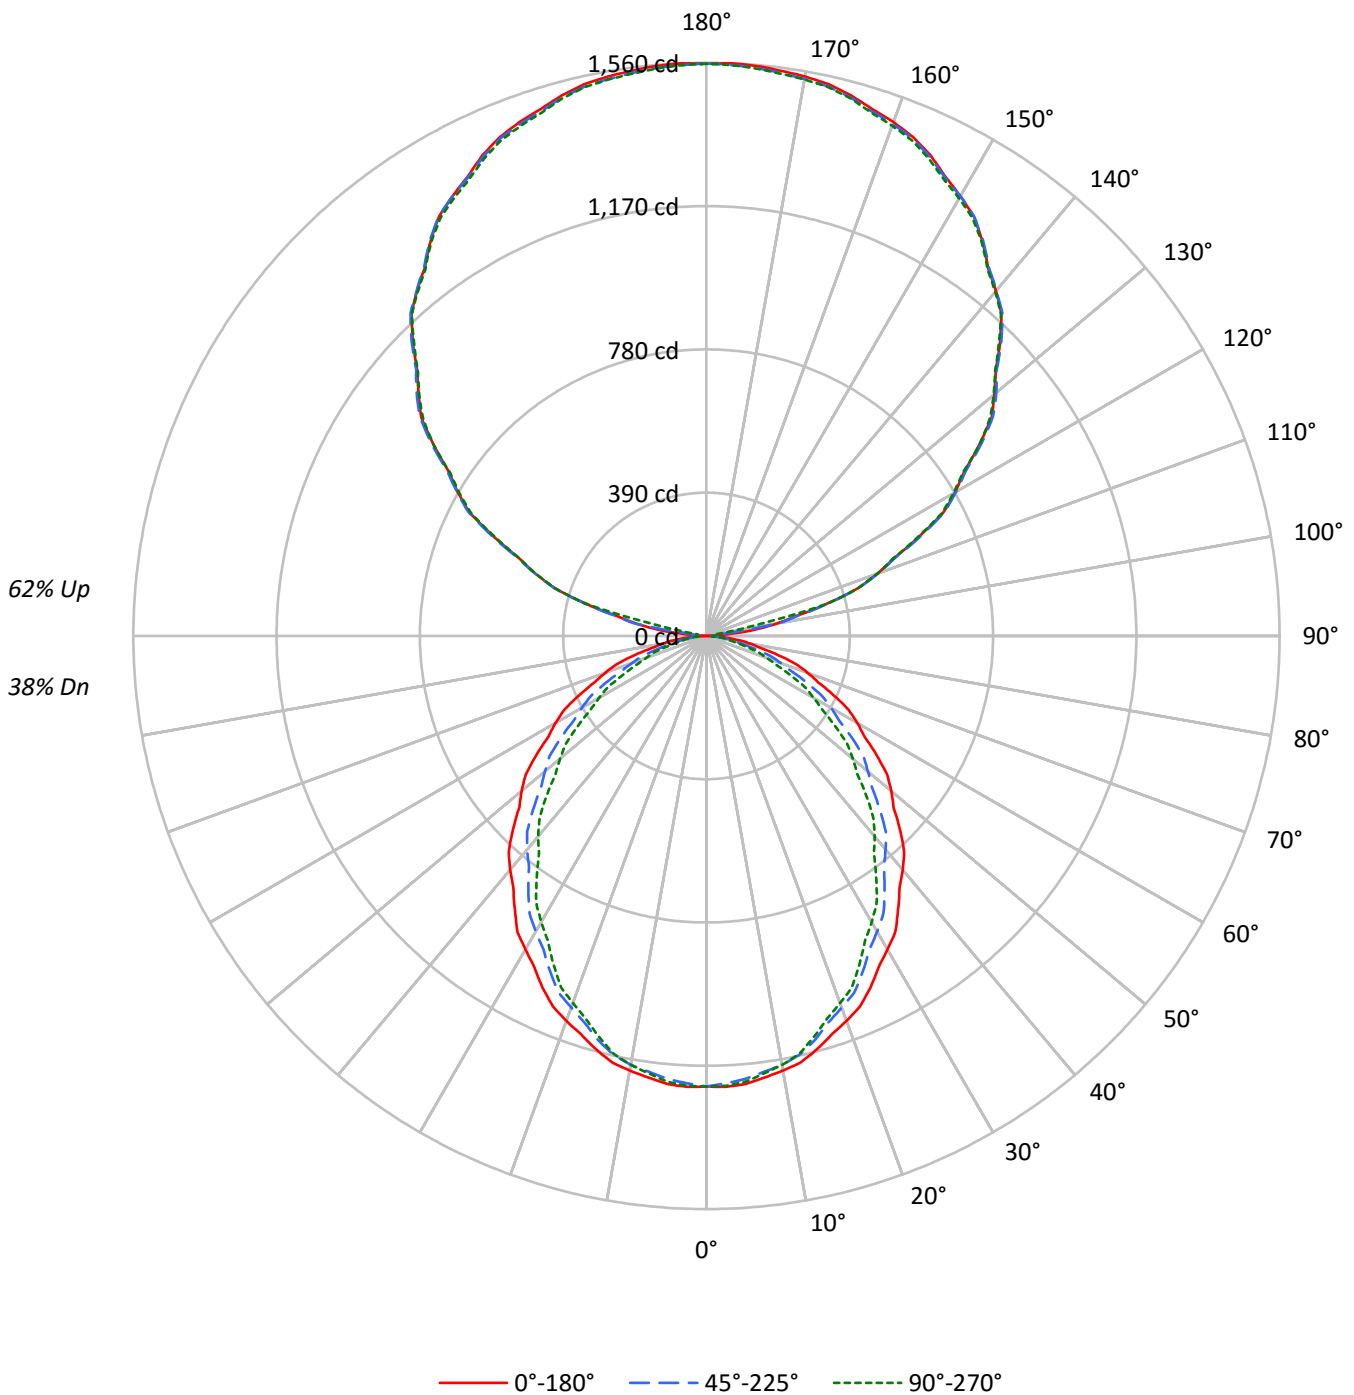



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38	32
2	87	80	74	69	79	72	67	63	59	56	52	47	44	42	35	34	32	27
3	79	70	63	57	72	64	58	53	52	48	44	41	38	36	31	29	28	23
4	73	62	54	49	66	57	50	45	46	42	38	37	34	31	28	26	24	20
5	67	55	47	42	60	51	44	39	42	36	33	33	30	27	25	23	21	17
6	61	50	42	36	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	57	45	37	32	51	41	34	29	34	29	25	27	23	21	21	18	16	14
8	52	41	33	28	48	37	31	26	31	26	22	25	21	18	19	17	15	12
9	49	37	30	25	44	34	27	23	28	23	20	23	19	17	18	15	13	11
10	46	34	27	22	41	31	25	21	26	21	18	21	18	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7919	7919	7919
5°	7937	7847	7895
10°	7877	7774	7774
15°	7783	7616	7554
20°	7663	7396	7307
25°	7524	7180	7021
30°	7348	6927	6706
35°	7171	6666	6352
40°	7003	6395	6004
45°	6801	6090	5624
50°	6597	5760	5230
55°	6361	5443	4808
60°	6124	5059	4354
65°	5845	4614	3834
70°	5527	4056	3305
75°	5085	3421	2750
80°	4478	2685	2310
85°	3772	2193	2060



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	1.5
10°-20°	322.2	4.2
20°-30°	467.2	6.1
30°-40°	532.5	6.9
40°-50°	519.1	6.8
50°-60°	436.9	5.7
60°-70°	306.3	4.0
70°-80°	157.4	2.0
80°-90°	43.0	0.6
90°-100°	56.6	0.7
100°-110°	348.8	4.5
110°-120°	632.6	8.2
120°-130°	811.9	10.6
130°-140°	873.3	11.4
140°-150°	819.7	10.7
150°-160°	663.1	8.6
160°-170°	428.8	5.6
170°-180°	147.9	1.9
0°-30°	904.7	11.8
0°-40°	1437.3	18.7
0°-60°	2393.2	31.2
0°-90°	2900.0	37.7
90°-120°	1038.1	13.5
90°-150°	3542.9	46.1
90°-180°	4783.0	62.3
0°-180°	7682.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1226	1226	1226	1226	1226	
5°	1224	1220	1210	1219	1218	116
15°	1164	1158	1139	1138	1130	328
25°	1056	1041	1008	996	985	486
35°	910	886	846	819	806	569
45°	745	716	667	631	616	574
55°	565	534	483	443	427	505
65°	382	350	302	266	251	379
75°	204	175	137	118	110	216
85°	51	35	30	29	28	57
90°	1	10	18	24	28	5
95°	66	60	18	24	24	84
105°	340	344	344	344	343	360
115°	637	643	644	640	633	632
125°	906	914	914	910	906	809
135°	1130	1137	1135	1132	1126	871
145°	1310	1313	1313	1313	1307	819
155°	1443	1437	1439	1441	1433	665
165°	1523	1516	1517	1523	1515	430
175°	1558	1551	1552	1560	1550	148
180°	1558	1558	1558	1558	1558	



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1228.3	1227.9	1227.4	1226.9	1226.4	1225.3	1223.7	1222.0	1220.4	1218.7	1220.4
5°	1224.3	1223.5	1222.6	1221.8	1221.0	1219.5	1217.2	1215.0	1212.6	1210.4	1212.5
7.5°	1212.3	1211.5	1210.7	1209.9	1209.2	1207.4	1204.7	1201.9	1199.3	1196.5	1197.9
10°	1201.1	1200.5	1199.9	1199.3	1198.6	1196.9	1194.1	1191.1	1188.3	1185.4	1186.0
12.5°	1188.6	1187.8	1187.0	1186.2	1185.4	1183.1	1179.2	1175.4	1171.5	1167.6	1168.1
15°	1164.1	1162.9	1161.6	1160.4	1159.1	1156.4	1152.1	1147.7	1143.4	1139.1	1138.9
17.5°	1136.5	1134.6	1132.7	1130.9	1128.9	1125.2	1119.8	1114.4	1108.9	1103.5	1102.5
20°	1115.0	1112.9	1110.9	1108.8	1106.8	1102.4	1095.9	1089.3	1082.7	1076.1	1075.1
22.5°	1091.3	1089.2	1087.2	1085.1	1083.1	1078.6	1071.7	1064.8	1057.8	1051.0	1048.9
25°	1055.8	1052.7	1049.5	1046.5	1043.4	1038.0	1030.5	1022.8	1015.2	1007.6	1005.0
27.5°	1015.0	1011.3	1007.5	1003.8	1000.1	994.1	986.0	977.8	969.6	961.4	957.7
30°	985.3	981.4	977.6	973.7	969.7	963.4	954.8	946.2	937.5	928.9	924.2
32.5°	956.4	951.9	947.4	942.8	938.2	931.5	922.7	913.9	905.1	896.3	891.1
35°	909.5	904.5	899.6	894.6	889.7	882.5	873.3	864.1	854.8	845.5	839.5
37.5°	863.3	857.3	851.3	845.3	839.3	831.5	822.0	812.3	802.8	793.3	786.1
40°	830.7	824.6	818.3	812.2	806.0	798.0	788.1	778.2	768.4	758.5	750.6
42.5°	796.7	790.3	784.0	777.6	771.2	763.0	752.8	742.6	732.4	722.2	714.7
45°	744.6	738.6	732.6	726.7	720.7	712.0	700.7	689.5	678.1	666.8	658.5
47.5°	690.7	684.4	678.1	671.8	665.5	656.7	645.2	633.8	622.4	611.0	602.5
50°	656.6	649.8	643.0	636.2	629.5	620.2	608.4	596.7	585.0	573.3	564.6
52.5°	619.6	612.6	605.6	598.7	591.7	582.7	571.7	560.6	549.5	538.4	529.1
55°	564.9	558.3	551.8	545.2	538.6	529.5	518.0	506.5	495.0	483.4	474.1
57.5°	509.7	502.7	495.6	488.6	481.6	472.5	461.4	450.2	439.2	428.0	419.0
60°	474.1	467.0	459.8	452.5	445.3	436.2	425.1	413.9	402.9	391.7	382.7
62.5°	436.4	429.5	422.7	415.7	408.8	399.8	388.5	377.3	366.0	354.7	346.3
65°	382.5	375.5	368.5	361.5	354.5	345.5	334.7	323.7	312.8	301.9	293.6
67.5°	329.0	321.9	315.0	308.0	301.0	292.2	281.8	271.3	260.9	250.4	242.9
70°	292.7	285.6	278.7	271.6	264.7	256.0	245.8	235.4	225.2	214.8	208.5
72.5°	257.1	250.2	243.4	236.6	229.8	221.5	211.9	202.2	192.6	183.0	177.1
75°	203.8	197.6	191.4	185.2	179.1	171.7	163.0	154.4	145.7	137.1	132.5
77.5°	150.8	145.8	140.9	136.0	131.0	125.1	118.2	111.3	104.3	97.5	94.3
80°	120.4	115.5	110.5	105.6	100.7	95.3	89.5	83.7	78.0	72.2	70.4
82.5°	90.8	86.3	81.9	77.4	72.9	68.8	64.8	60.9	56.9	53.0	52.1
85°	50.9	47.3	43.5	39.9	36.1	33.7	32.7	31.7	30.7	29.6	29.4
87.5°	17.3	16.5	15.8	15.1	14.3	14.0	14.3	14.4	14.6	14.8	15.1
90°	1.2	3.2	5.3	7.3	9.4	11.3	13.1	14.9	16.7	18.5	19.8
92.5°	17.7	16.3	14.9	13.5	12.0	12.1	13.7	15.2	16.9	18.5	19.8
95°	65.8	65.0	64.3	63.5	62.7	57.4	47.7	38.0	28.2	18.5	19.8
97.5°	137.4	138.8	140.2	141.5	142.9	133.9	114.7	95.4	76.1	56.8	49.6
100°	192.8	193.6	194.3	195.1	195.9	196.8	197.8	198.9	199.8	200.9	162.6
102.5°	249.1	250.1	251.1	252.1	253.1	253.9	254.5	255.1	255.7	256.3	249.1
105°	339.5	340.5	341.5	342.5	343.6	344.0	344.0	344.0	344.0	344.0	344.0
107.5°	433.2	433.2	433.2	433.2	433.2	433.5	434.0	434.4	435.0	435.5	435.5
110°	494.2	494.2	494.2	494.2	494.2	494.4	494.9	495.4	496.0	496.4	495.7



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	551.4	552.1	552.7	553.2	553.8	554.4	554.6	554.9	555.3	555.5	554.6
115°	637.3	638.6	639.9	641.1	642.5	643.2	643.5	643.7	644.0	644.3	643.2
117.5°	726.2	726.1	726.1	726.0	726.0	726.5	727.5	728.4	729.4	730.4	729.1
120°	781.6	781.4	781.1	780.9	780.6	780.9	781.6	782.4	783.2	783.9	783.5
122.5°	830.5	831.5	832.5	833.5	834.5	835.2	835.5	835.9	836.2	836.6	836.1
125°	906.3	908.1	909.9	911.7	913.5	914.4	914.4	914.4	914.4	914.4	913.4
127.5°	978.6	979.9	981.1	982.4	983.7	984.3	984.1	984.0	983.8	983.6	983.1
130°	1022.9	1024.2	1025.5	1026.8	1028.1	1028.9	1029.1	1029.3	1029.6	1029.8	1029.1
132.5°	1067.3	1068.7	1070.2	1071.7	1073.2	1073.7	1073.1	1072.5	1072.0	1071.4	1071.3
135°	1130.3	1131.8	1133.4	1134.9	1136.5	1136.9	1136.5	1136.0	1135.4	1134.9	1134.4
137.5°	1188.3	1189.5	1190.9	1192.2	1193.6	1194.0	1193.6	1193.1	1192.7	1192.2	1192.3
140°	1226.1	1226.6	1227.2	1227.6	1228.2	1228.3	1228.1	1227.8	1227.5	1227.3	1227.8
142.5°	1260.3	1260.6	1260.9	1261.2	1261.5	1261.9	1262.2	1262.6	1262.9	1263.3	1263.4
145°	1310.4	1310.9	1311.4	1312.0	1312.4	1312.7	1312.7	1312.7	1312.7	1312.7	1313.0
147.5°	1354.2	1354.2	1354.1	1354.0	1353.9	1354.0	1354.2	1354.6	1354.9	1355.2	1355.5
150°	1382.0	1381.4	1381.0	1380.5	1379.9	1379.9	1380.5	1381.0	1381.4	1382.0	1382.5
152.5°	1408.7	1407.7	1406.5	1405.4	1404.3	1403.9	1404.4	1405.0	1405.5	1406.0	1406.5
155°	1443.1	1441.6	1440.1	1438.6	1437.0	1436.5	1437.0	1437.5	1438.1	1438.6	1439.3
157.5°	1469.7	1468.8	1467.8	1467.0	1466.1	1465.6	1465.6	1465.7	1465.8	1465.8	1466.6
160°	1488.2	1486.7	1485.1	1483.5	1482.0	1481.4	1481.7	1481.9	1482.2	1482.5	1483.5
162.5°	1503.0	1501.5	1499.9	1498.3	1496.8	1496.2	1496.5	1496.7	1496.9	1497.2	1498.6
165°	1522.9	1521.3	1519.7	1518.2	1516.7	1516.0	1516.3	1516.5	1516.8	1517.1	1518.6
167.5°	1537.6	1536.1	1534.5	1532.9	1531.2	1530.6	1530.8	1531.1	1531.3	1531.6	1533.5
170°	1546.0	1544.2	1542.3	1540.5	1538.7	1537.9	1538.2	1538.5	1538.7	1539.0	1541.1
172.5°	1551.5	1549.7	1547.9	1546.0	1544.3	1543.6	1544.1	1544.5	1545.0	1545.4	1547.3
175°	1557.5	1555.9	1554.4	1552.8	1551.3	1550.7	1551.0	1551.2	1551.5	1551.7	1553.7
177.5°	1560.2	1559.0	1557.8	1556.6	1555.3	1554.8	1555.1	1555.2	1555.4	1555.6	1557.1
180°	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1222.0	1223.7	1225.3	1226.1	1225.9	1225.7	1225.6	1225.4
5°	1214.5	1216.6	1218.6	1219.5	1219.1	1218.6	1218.3	1217.8
7.5°	1199.4	1200.9	1202.3	1202.7	1202.3	1201.8	1201.4	1201.0
10°	1186.6	1187.2	1187.8	1187.8	1187.2	1186.6	1186.0	1185.4
12.5°	1168.5	1168.9	1169.4	1169.2	1168.2	1167.2	1166.4	1165.4
15°	1138.7	1138.4	1138.3	1137.3	1135.4	1133.5	1131.7	1129.8
17.5°	1101.4	1100.5	1099.4	1098.1	1096.6	1095.1	1093.6	1092.1
20°	1074.1	1073.0	1072.0	1070.6	1068.7	1066.8	1065.0	1063.2
22.5°	1046.9	1044.9	1042.9	1041.1	1039.6	1038.0	1036.5	1035.0
25°	1002.3	999.6	996.9	994.4	992.1	989.9	987.7	985.3
27.5°	954.0	950.2	946.5	943.5	941.4	939.1	937.0	934.8
30°	919.4	914.7	909.9	906.7	904.8	902.9	901.1	899.2
32.5°	885.8	880.6	875.4	871.6	869.2	866.9	864.5	862.2
35°	833.6	827.6	821.6	817.3	814.3	811.5	808.6	805.7
37.5°	779.0	771.8	764.6	759.6	756.9	754.0	751.3	748.5
40°	742.8	735.0	727.2	722.0	719.6	717.1	714.6	712.2
42.5°	707.2	699.7	692.2	686.6	683.1	679.4	675.7	672.2
45°	650.3	642.1	633.8	628.2	625.1	622.1	618.9	615.8
47.5°	594.1	585.6	577.1	571.1	567.8	564.4	560.9	557.5
50°	556.0	547.3	538.7	532.8	529.8	526.6	523.5	520.5
52.5°	519.9	510.5	501.2	495.0	492.0	488.8	485.8	482.7
55°	464.9	455.7	446.4	440.1	436.8	433.5	430.3	427.0
57.5°	409.9	400.9	391.8	385.8	382.9	380.0	377.1	374.2
60°	373.6	364.5	355.5	349.5	346.3	343.3	340.2	337.1
62.5°	337.9	329.5	321.1	315.4	312.3	309.2	306.1	303.0
65°	285.4	277.2	268.9	263.3	260.2	257.2	254.0	250.9
67.5°	235.3	227.8	220.3	215.3	212.9	210.4	207.9	205.5
70°	202.1	195.7	189.3	184.9	182.4	179.9	177.5	175.0
72.5°	171.2	165.3	159.4	155.7	154.0	152.4	150.8	149.1
75°	128.0	123.5	119.0	116.0	114.5	113.1	111.6	110.2
77.5°	91.0	87.9	84.7	82.7	81.6	80.5	79.5	78.4
80°	68.6	66.7	64.8	63.7	63.3	62.9	62.4	62.1
82.5°	51.3	50.4	49.5	49.0	48.7	48.5	48.2	48.0
85°	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8
87.5°	15.3	15.6	15.9	16.0	16.0	16.0	16.0	15.9
90°	21.0	22.3	23.6	24.6	25.4	26.1	26.9	27.7
92.5°	21.0	22.3	23.6	24.4	24.8	25.1	25.5	25.9
95°	21.0	22.3	23.6	24.3	24.3	24.3	24.3	24.3
97.5°	42.4	35.1	27.8	24.3	24.3	24.3	24.3	24.3
100°	124.4	86.2	48.0	28.4	27.3	26.3	25.2	24.3
102.5°	241.8	234.6	227.4	215.0	197.6	180.1	162.6	145.3
105°	344.0	344.0	344.0	343.9	343.7	343.4	343.1	342.9
107.5°	435.6	435.7	435.7	435.3	434.5	433.8	433.0	432.3
110°	494.9	494.2	493.4	493.1	493.4	493.7	493.9	494.2



TEST NUMBER: P333694-940

CATALOG NUMBER: S125RDIW-S850D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	553.6	552.7	551.7	551.0	550.6	550.3	549.9	549.6
115°	642.2	641.1	640.2	638.8	637.3	635.8	634.2	632.7
117.5°	727.7	726.4	725.1	724.0	723.4	722.7	722.0	721.4
120°	782.9	782.4	781.9	781.0	779.7	778.4	777.1	775.9
122.5°	835.5	835.0	834.6	833.5	832.1	830.5	829.0	827.6
125°	912.3	911.3	910.3	909.4	908.7	907.9	907.0	906.3
127.5°	982.6	982.0	981.4	980.2	978.3	976.4	974.5	972.6
130°	1028.3	1027.5	1026.8	1025.7	1024.5	1023.1	1021.9	1020.7
132.5°	1071.1	1070.9	1070.8	1070.1	1068.8	1067.6	1066.2	1065.0
135°	1133.9	1133.4	1132.8	1131.8	1130.3	1128.7	1127.2	1125.7
137.5°	1192.4	1192.5	1192.6	1191.9	1190.6	1189.3	1187.9	1186.6
140°	1228.3	1228.8	1229.3	1228.8	1227.3	1225.7	1224.2	1222.6
142.5°	1263.5	1263.6	1263.7	1263.0	1261.4	1259.9	1258.4	1256.9
145°	1313.2	1313.5	1313.8	1313.1	1311.5	1310.0	1308.5	1307.0
147.5°	1355.8	1356.1	1356.5	1355.7	1353.8	1351.9	1350.1	1348.3
150°	1383.0	1383.5	1384.0	1383.2	1381.2	1379.1	1377.1	1375.0
152.5°	1407.0	1407.6	1408.0	1407.4	1405.5	1403.7	1401.9	1400.0
155°	1440.1	1440.8	1441.6	1441.0	1439.0	1436.9	1434.9	1432.8
157.5°	1467.5	1468.3	1469.1	1468.5	1466.4	1464.4	1462.3	1460.3
160°	1484.5	1485.5	1486.6	1486.0	1484.0	1481.9	1479.9	1477.8
162.5°	1500.0	1501.6	1503.0	1502.5	1500.3	1498.0	1495.8	1493.5
165°	1520.1	1521.7	1523.2	1523.0	1520.9	1518.9	1516.8	1514.7
167.5°	1535.3	1537.1	1539.0	1538.7	1536.4	1534.2	1531.9	1529.6
170°	1543.1	1545.2	1547.2	1547.1	1544.8	1542.5	1540.2	1537.8
172.5°	1549.2	1551.0	1552.8	1552.6	1550.3	1548.0	1545.7	1543.4
175°	1555.8	1557.8	1559.9	1559.8	1557.5	1555.1	1552.8	1550.5
177.5°	1558.5	1560.0	1561.4	1561.3	1559.6	1558.0	1556.3	1554.7
180°	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5	1557.5

(END OF REPORT)