

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P402022

Luminaire Tested: **LA1MR012D010 EA1M12509027MW1MW**

Issue Date: 6/3/2020



Test Information

Test Method: LM-41-14
Report Number: P402022
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1912-604-8)
Test Lab: INNOVATION CENTER (G3)
Issue Date: 6/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LA1MR012D010 EA1M12509027MW1MW
Description: 1 INCH 50° OPTIC WITH MATTE WHITE BAFFLE
Light Source: HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 219.8 lumens
Efficiency: N/A
Efficacy: 61.0 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.71
Luminous Opening: Rectangular (W 0.1' x L: 1.29' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P402022

CATALOG NUMBER: LA1MR012D010 EA1M12509027MW1MW

Luminous Intensity Polar Plot

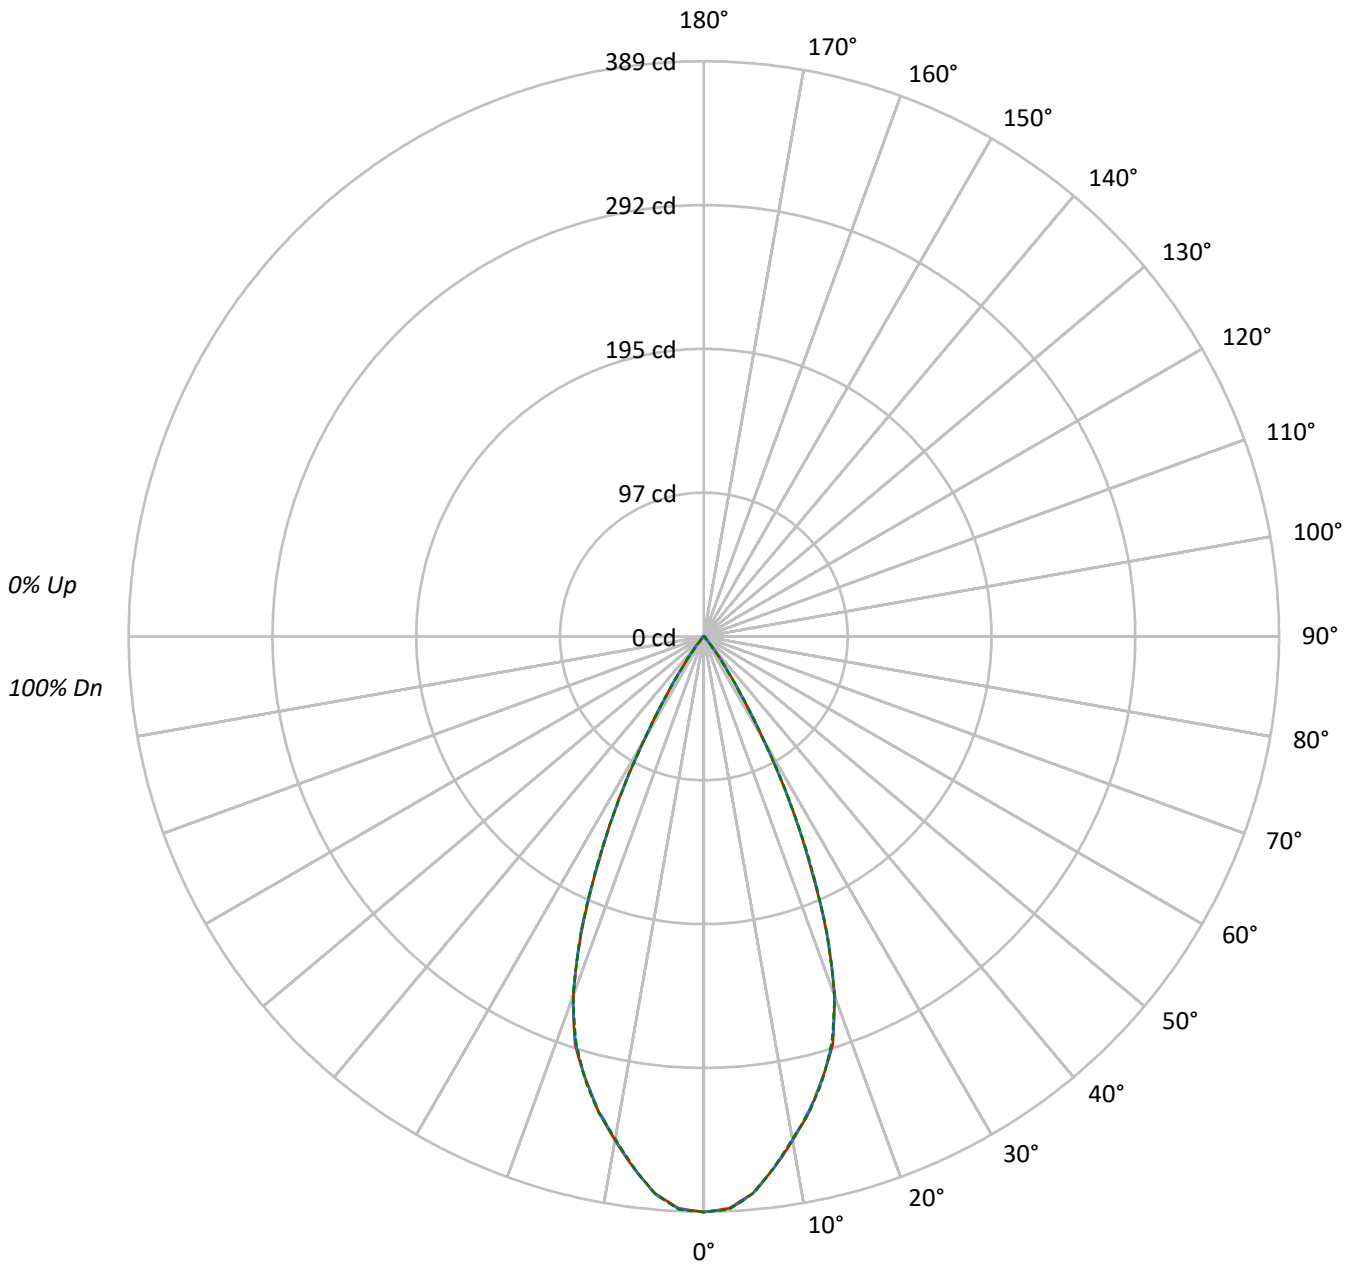



TEST NUMBER: P402022

CATALOG NUMBER: LA1MR012D010 EA1M12509027MW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95																			
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90																			
3	105	99	95	92	103	98	94	91	96	92	90	93	90	88	91	89	87	85																			
4	101	94	89	86	99	93	89	85	91	87	84	89	86	83	87	85	82	81																			
5	97	89	84	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77																			
6	93	85	80	76	91	84	79	76	83	79	75	82	78	75	80	77	75	73																			
7	89	81	76	72	88	80	76	72	79	75	72	78	74	71	77	74	71	70																			
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	67																			
9	82	74	69	65	81	73	69	65	73	68	65	72	68	65	71	67	65	64																			
10	79	71	66	62	78	70	66	62	70	65	62	69	65	62	68	64	62	61																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	31144	31144	31144
5°	30364	30404	30380
10°	28107	28066	28026
15°	25625	25650	25691
20°	21982	22050	21965
25°	14900	15085	15059
30°	7381	7427	7399
35°	2461	2481	2334
40°	564	543	470
45°	215	249	204
50°	174	187	162
55°	167	167	139
60°	128	144	112
65°	76	95	76
70°	0	23	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P402022

CATALOG NUMBER: LA1MR012D010 EA1M12509027MW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.0	15.9
10°-20°	85.9	39.1
20°-30°	76.5	34.8
30°-40°	19.1	8.7
40°-50°	1.8	0.8
50°-60°	1.0	0.5
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	197.5	89.9
0°-40°	216.6	98.5
0°-60°	219.4	99.8
0°-90°	219.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	219.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	389	389	389	389	389	
5°	378	379	379	378	378	35
15°	309	311	310	309	310	86
25°	169	171	171	172	171	76
35°	25	26	25	25	24	19
45°	2	2	2	2	2	2
55°	1	1	1	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P402022

CATALOG NUMBER: LA1MR012D010 EA1M12509027MW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	389.3	389.3	389.3	389.3	389.3
2.5°	387.1	388.8	387.6	387.7	387.8
5°	378.1	379.4	378.6	378.3	378.3
7.5°	362.7	364.0	362.6	363.1	362.5
10°	346.0	347.3	345.5	345.5	345.0
12.5°	329.1	330.4	328.3	328.1	329.4
15°	309.4	311.0	309.7	309.2	310.2
17.5°	289.5	289.2	288.5	288.2	287.8
20°	258.2	259.5	259.0	256.8	258.0
22.5°	217.0	217.1	217.8	218.2	217.3
25°	168.8	170.7	170.9	172.0	170.6
27.5°	125.1	125.4	123.5	123.6	125.0
30°	79.9	81.0	80.4	81.0	80.1
32.5°	46.1	47.0	46.7	47.1	47.2
35°	25.2	26.2	25.4	25.0	23.9
37.5°	12.5	12.5	12.8	11.8	11.2
40°	5.4	5.5	5.2	5.0	4.5
42.5°	2.7	2.7	2.9	2.4	2.4
45°	1.9	1.9	2.2	1.9	1.8
47.5°	1.7	1.7	1.8	1.6	1.5
50°	1.4	1.4	1.5	1.4	1.3
52.5°	1.3	1.3	1.4	1.2	1.2
55°	1.2	1.2	1.2	1.1	1.0
57.5°	0.9	1.0	1.0	0.9	0.9
60°	0.8	0.8	0.9	0.8	0.7
62.5°	0.6	0.6	0.6	0.6	0.6
65°	0.4	0.4	0.5	0.4	0.4
67.5°	0.1	0.1	0.4	0.0	0.0
70°	0.0	0.0	0.1	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)