

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P402203

Luminaire Tested: **LD1MR012D010 ED1M12509030SB1MW**

Issue Date: 6/3/2020



Test Information

Test Method: LM-41-14
Report Number: P402203
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1912-604-8)
Test Lab: INNOVATION CENTER (G3)
Issue Date: 6/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD1MR012D010 ED1M12509030SB1MW
Description: 1 INCH 50° OPTIC WITH SPECULAR BLACK BAFFLE
Light Source: HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 220.3 lumens
Efficiency: N/A
Efficacy: 61.2 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.71
Luminous Opening: Rectangular (W 0.1' x L: 1.29' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P402203

CATALOG NUMBER: LD1MR012D010 ED1M12509030SB1MW

Luminous Intensity Polar Plot

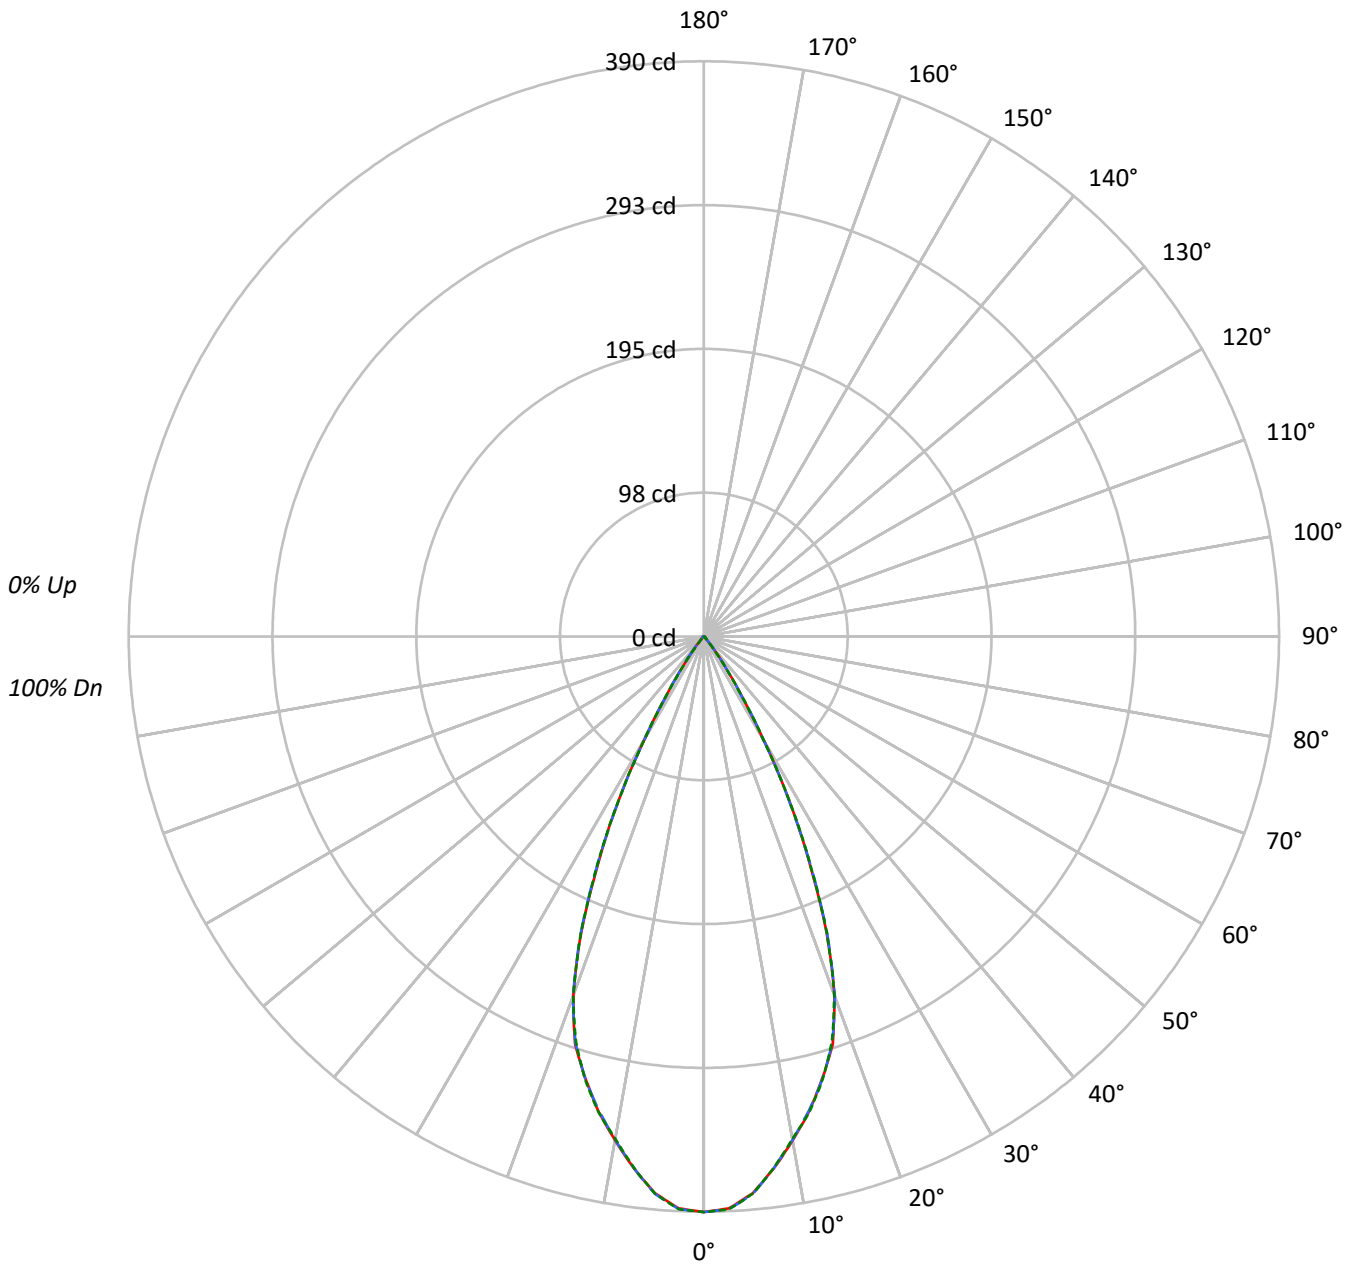



TEST NUMBER: P402203

CATALOG NUMBER: LD1MR012D010 ED1M12509030SB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	99	98	97	95		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	93	92	91	89	87	85	
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90	90	88	87	85	83	81	79	
3	105	99	95	92	103	98	94	91	96	92	90	93	90	88	91	89	87	85	85	83	82	80	78	77	75	
4	101	94	89	86	99	93	89	85	91	87	84	89	86	83	87	85	82	81	81	79	78	76	74	73	71	
5	97	89	84	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77	77	75	74	72	70	69	67	
6	93	85	80	76	91	84	79	76	83	79	75	82	78	75	80	77	75	73	73	71	70	68	67	65	64	
7	89	81	76	72	88	80	76	72	79	75	72	78	74	71	77	74	71	70	70	68	67	65	64	62	61	
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	67	67	65	64	62	61	60	59	
9	82	74	69	65	81	73	69	65	73	68	65	72	68	65	71	67	65	64	64	62	61	60	59	58	57	
10	79	71	66	62	78	70	66	62	70	65	62	69	65	62	68	64	62	61	61	59	58	57	56	55	54	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	31224	31224	31224
5°	30436	30476	30460
10°	28180	28139	28099
15°	25691	25716	25758
20°	22033	22101	22016
25°	14935	15121	15094
30°	7399	7446	7418
35°	2471	2490	2334
40°	564	553	470
45°	215	249	204
50°	174	187	162
55°	167	167	139
60°	128	144	112
65°	76	95	76
70°	0	23	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P402203

CATALOG NUMBER: LD1MR012D010 ED1M12509030SB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.1	15.9
10°-20°	86.1	39.1
20°-30°	76.7	34.8
30°-40°	19.1	8.7
40°-50°	1.8	0.8
50°-60°	1.0	0.5
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	198.0	89.9
0°-40°	217.1	98.5
0°-60°	219.9	99.8
0°-90°	220.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	220.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	390	390	390	390	390	
5°	379	380	380	379	379	35
15°	310	312	310	310	311	86
25°	169	171	171	172	171	76
35°	25	26	26	25	24	19
45°	2	2	2	2	2	2
55°	1	1	1	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P402203

CATALOG NUMBER: LD1MR012D010 ED1M12509030SB1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	390.3	390.3	390.3	390.3	390.3
2.5°	388.1	389.8	388.6	388.7	388.7
5°	379.0	380.4	379.5	379.2	379.3
7.5°	363.7	364.9	363.5	364.0	363.4
10°	346.9	348.2	346.4	346.4	345.9
12.5°	329.9	331.2	329.1	328.9	330.3
15°	310.2	311.7	310.5	309.9	311.0
17.5°	290.2	290.0	289.3	288.9	288.5
20°	258.8	260.1	259.6	257.5	258.6
22.5°	217.6	217.7	218.4	218.7	217.8
25°	169.2	171.1	171.3	172.5	171.0
27.5°	125.4	125.7	123.8	123.9	125.3
30°	80.1	81.2	80.6	81.2	80.3
32.5°	46.2	47.2	46.8	47.2	47.3
35°	25.3	26.2	25.5	25.1	23.9
37.5°	12.5	12.5	12.8	11.8	11.2
40°	5.4	5.6	5.3	5.0	4.5
42.5°	2.7	2.7	2.9	2.5	2.4
45°	1.9	1.9	2.2	1.9	1.8
47.5°	1.7	1.7	1.8	1.6	1.5
50°	1.4	1.4	1.5	1.4	1.3
52.5°	1.3	1.3	1.4	1.2	1.2
55°	1.2	1.2	1.2	1.1	1.0
57.5°	0.9	1.0	1.0	0.9	0.9
60°	0.8	0.8	0.9	0.8	0.7
62.5°	0.6	0.6	0.6	0.6	0.6
65°	0.4	0.4	0.5	0.4	0.4
67.5°	0.1	0.1	0.4	0.0	0.0
70°	0.0	0.0	0.1	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)