

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P402207

Luminaire Tested: **LD1MR012D010 ED1M12509035SB1MW**

Issue Date: 6/3/2020



Test Information

Test Method: LM-41-14
Report Number: P402207
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1912-604-8)
Test Lab: INNOVATION CENTER (G3)
Issue Date: 6/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD1MR012D010 ED1M12509035SB1MW
Description: 1 INCH 50° OPTIC WITH SPECULAR BLACK BAFFLE
Light Source: HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 231.3 lumens
Efficiency: N/A
Efficacy: 64.2 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.71
Luminous Opening: Rectangular (W 0.1' x L: 1.29' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P402207

CATALOG NUMBER: LD1MR012D010 ED1M12509035SB1MW

Luminous Intensity Polar Plot

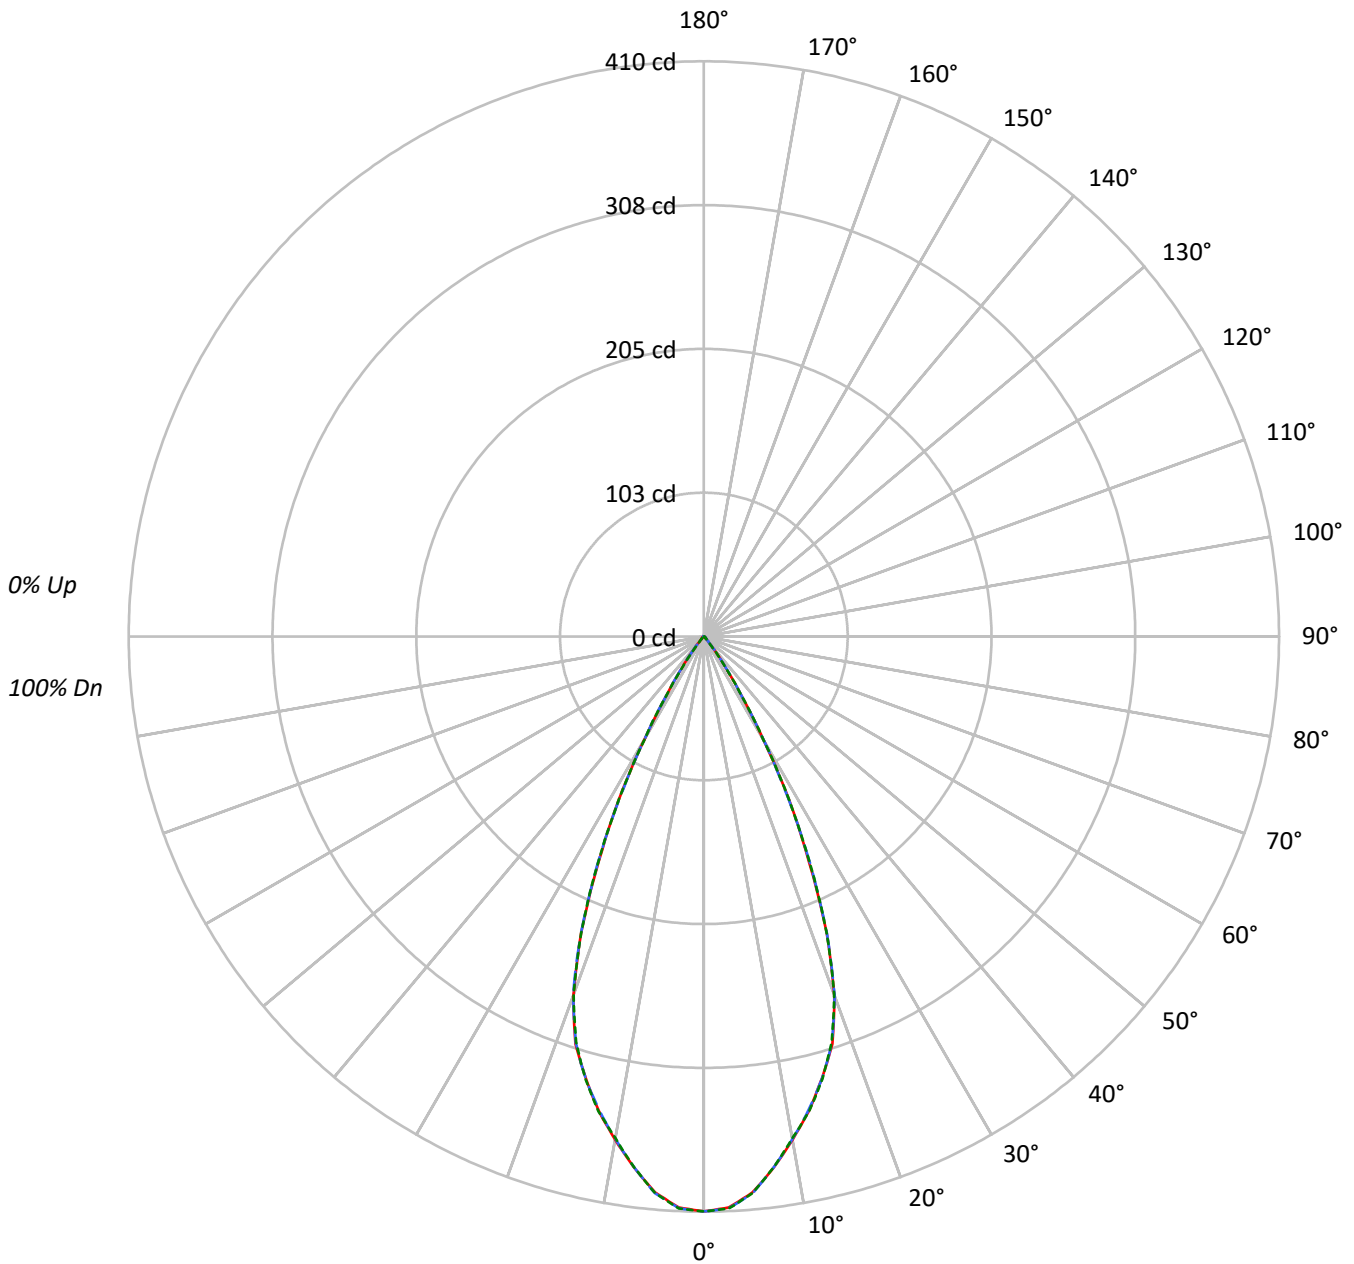



TEST NUMBER: P402207

CATALOG NUMBER: LD1MR012D010 ED1M12509035SB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95																			
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90																			
3	105	99	95	92	103	98	94	91	96	92	90	93	90	88	91	89	87	85																			
4	101	94	89	86	99	93	89	85	91	87	84	89	86	83	87	85	82	81																			
5	97	89	84	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77																			
6	93	85	80	76	91	84	79	76	83	79	75	82	78	75	80	77	75	73																			
7	89	81	76	72	88	80	76	72	79	75	72	78	74	71	77	74	71	70																			
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	67																			
9	82	74	69	65	81	73	69	65	73	68	65	72	68	65	71	67	65	64																			
10	79	71	66	62	78	70	66	62	70	65	62	69	65	62	68	64	62	61																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	32784	32784	32784
5°	31954	31994	31978
10°	29585	29545	29496
15°	26967	27000	27033
20°	23131	23199	23114
25°	15677	15871	15844
30°	7769	7815	7787
35°	2598	2608	2451
40°	595	574	501
45°	226	260	215
50°	187	199	174
55°	167	167	153
60°	128	144	128
65°	95	95	76
70°	0	23	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P402207

CATALOG NUMBER: LD1MR012D010 ED1M12509035SB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.9	15.9
10°-20°	90.4	39.1
20°-30°	80.5	34.8
30°-40°	20.1	8.7
40°-50°	1.9	0.8
50°-60°	1.1	0.5
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	207.8	89.8
0°-40°	227.9	98.5
0°-60°	230.9	99.8
0°-90°	231.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	231.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	410	410	410	410	410	
5°	398	399	398	398	398	37
15°	326	327	326	325	326	90
25°	178	180	180	181	180	80
35°	27	28	27	26	25	20
45°	2	2	2	2	2	2
55°	1	1	1	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P402207

CATALOG NUMBER: LD1MR012D010 ED1M12509035SB1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	409.8	409.8	409.8	409.8	409.8
2.5°	407.4	409.2	407.9	408.0	408.1
5°	397.9	399.3	398.4	398.1	398.2
7.5°	381.8	383.0	381.6	382.1	381.5
10°	364.2	365.5	363.7	363.7	363.1
12.5°	346.3	347.7	345.5	345.3	346.7
15°	325.6	327.3	326.0	325.4	326.4
17.5°	304.6	304.4	303.6	303.3	302.9
20°	271.7	273.1	272.5	270.3	271.5
22.5°	228.4	228.5	229.2	229.6	228.6
25°	177.6	179.6	179.8	181.0	179.5
27.5°	131.6	132.0	130.0	130.1	131.5
30°	84.1	85.2	84.6	85.2	84.3
32.5°	48.5	49.5	49.1	49.6	49.6
35°	26.6	27.5	26.7	26.3	25.1
37.5°	13.2	13.2	13.5	12.4	11.8
40°	5.7	5.8	5.5	5.2	4.8
42.5°	2.9	2.9	3.0	2.6	2.5
45°	2.0	2.0	2.3	2.0	1.9
47.5°	1.7	1.7	1.9	1.7	1.6
50°	1.5	1.5	1.6	1.4	1.4
52.5°	1.4	1.4	1.4	1.3	1.2
55°	1.2	1.2	1.2	1.1	1.1
57.5°	1.0	1.1	1.1	1.0	0.9
60°	0.8	0.8	0.9	0.8	0.8
62.5°	0.7	0.7	0.7	0.7	0.6
65°	0.5	0.5	0.5	0.5	0.4
67.5°	0.1	0.2	0.4	0.0	0.0
70°	0.0	0.0	0.1	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)