

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P402274

Luminaire Tested: **LD1MR022D010 ED1M22509040MW1MW**

Issue Date: 6/3/2020



Test Information

Test Method: LM-41-14
Report Number: P402274
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1912-604-8)
Test Lab: INNOVATION CENTER (G3)
Issue Date: 6/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD1MR022D010 ED1M22509040MW1MW
Description: 1 INCH 50° OPTIC WITH MATTE WHITE BAFFLE
Light Source: HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 455.6 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.71
Luminous Opening: Rectangular (W 0.1' x L: 1.29' x H: 0')
CIE Type: Direct

Input Watts (W): 5.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P402274

CATALOG NUMBER: LD1MR022D010 ED1M22509040MW1MW

Luminous Intensity Polar Plot

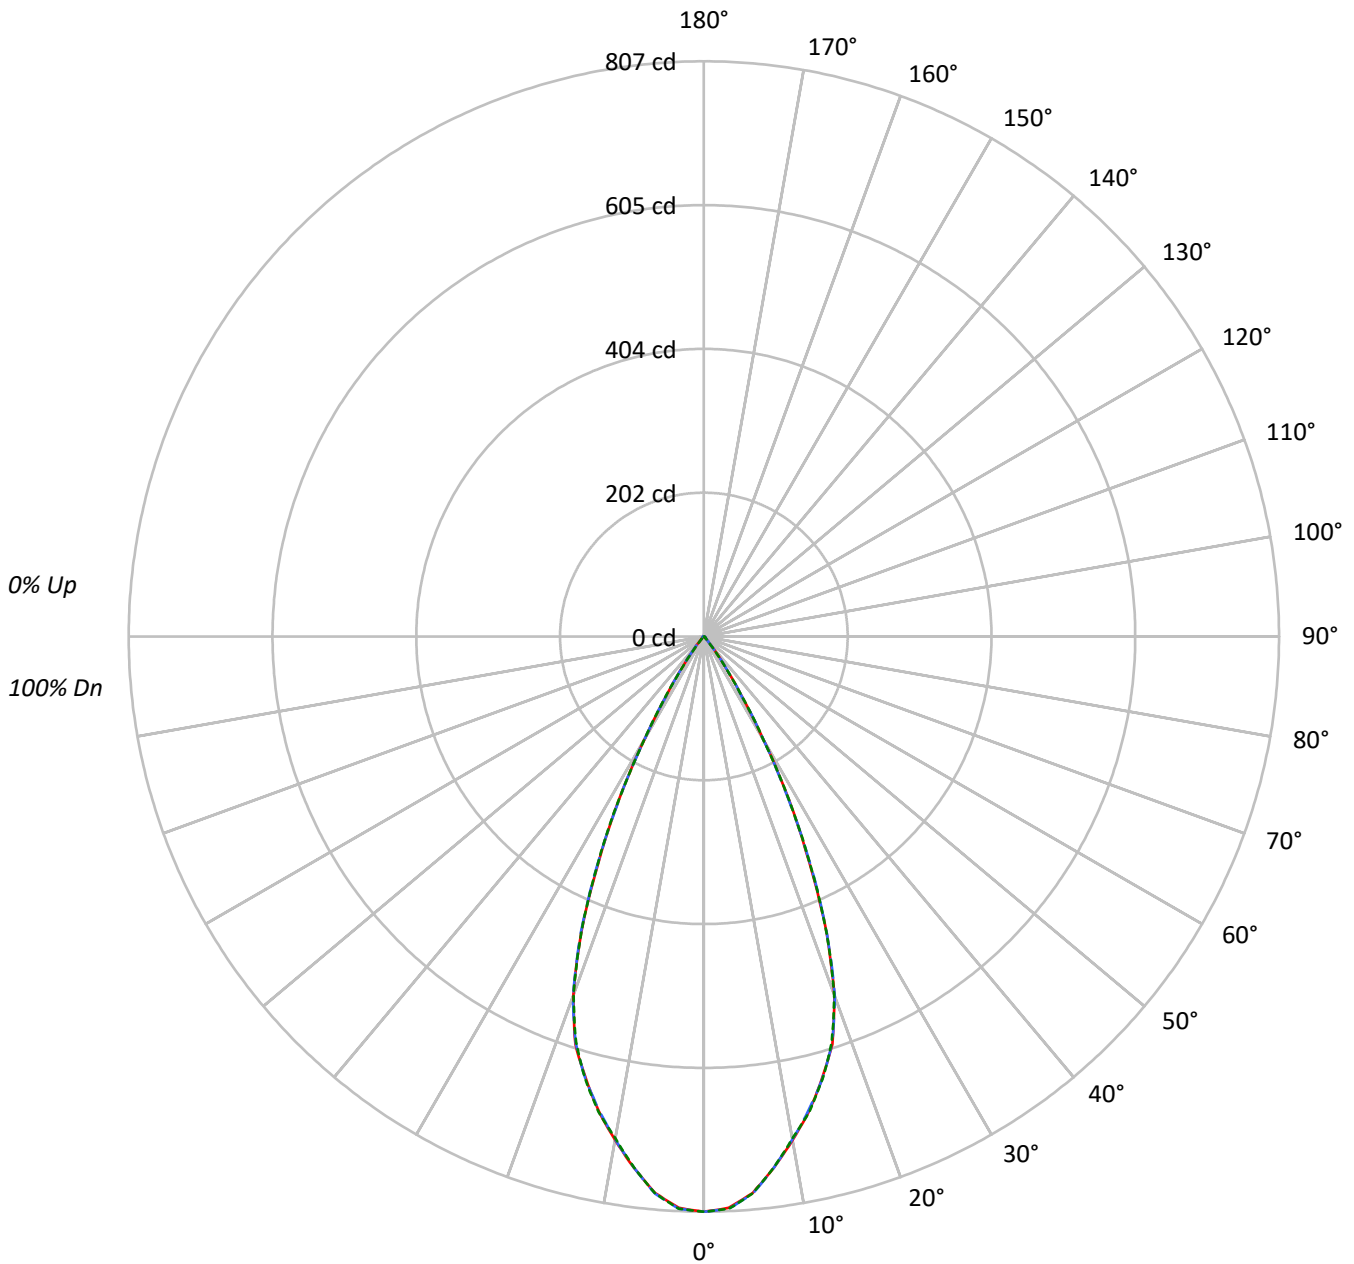



TEST NUMBER: P402274

CATALOG NUMBER: LD1MR022D010 ED1M22509040MW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95					95			
2	110	105	102	99	107	104	100	98	100	98	96	98	95	94	95	93	92	90					90			
3	105	99	95	92	103	98	94	91	96	92	90	93	90	88	91	89	87	85					85			
4	101	94	89	86	99	93	89	85	91	87	84	89	86	83	87	85	82	81					81			
5	97	89	84	81	95	89	84	80	87	83	80	85	82	79	84	81	78	77					77			
6	93	85	80	76	91	84	79	76	83	79	75	82	78	75	80	77	75	73					73			
7	89	81	76	72	88	80	76	72	79	75	72	78	74	71	77	74	71	70					70			
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	67					67			
9	82	74	69	65	81	73	69	65	73	68	65	72	68	65	71	67	65	64					64			
10	79	71	66	62	78	70	66	62	70	65	62	69	65	62	68	64	62	61					61			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	64568	64568	64568
5°	62935	63024	62984
10°	58277	58188	58090
15°	53114	53180	53255
20°	45564	45700	45521
25°	30886	31265	31212
30°	15297	15399	15344
35°	5108	5137	4834
40°	1170	1138	982
45°	453	509	419
50°	373	386	336
55°	335	335	293
60°	256	288	240
65°	170	189	133
70°	0	23	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P402274

CATALOG NUMBER: LD1MR022D010 ED1M22509040MW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.7	15.9
10°-20°	178.1	39.1
20°-30°	158.6	34.8
30°-40°	39.6	8.7
40°-50°	3.8	0.8
50°-60°	2.1	0.5
60°-70°	0.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	409.3	89.9
0°-40°	448.9	98.5
0°-60°	454.7	99.8
0°-90°	455.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	455.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	807	807	807	807	807	
5°	784	786	785	784	784	73
15°	641	645	642	641	643	178
25°	350	354	354	357	354	158
35°	52	54	53	52	50	39
45°	4	4	4	4	4	4
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P402274

CATALOG NUMBER: LD1MR022D010 ED1M22509040MW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	807.1	807.1	807.1	807.1	807.1
2.5°	802.5	806.1	803.5	803.7	803.8
5°	783.7	786.5	784.8	784.2	784.3
7.5°	752.0	754.5	751.7	752.7	751.5
10°	717.4	719.9	716.3	716.3	715.1
12.5°	682.2	684.9	680.5	680.1	682.9
15°	641.3	644.6	642.1	640.9	643.0
17.5°	600.0	599.6	598.1	597.4	596.6
20°	535.2	537.9	536.8	532.4	534.7
22.5°	449.9	450.1	451.6	452.3	450.4
25°	349.9	353.8	354.2	356.6	353.6
27.5°	259.2	260.0	256.0	256.3	259.1
30°	165.6	167.9	166.7	167.9	166.1
32.5°	95.6	97.5	96.8	97.6	97.8
35°	52.3	54.3	52.6	51.9	49.5
37.5°	25.9	25.9	26.5	24.4	23.3
40°	11.2	11.5	10.9	10.3	9.4
42.5°	5.7	5.7	6.0	5.1	4.9
45°	4.0	4.0	4.5	3.9	3.7
47.5°	3.4	3.4	3.7	3.3	3.1
50°	3.0	3.0	3.1	2.8	2.7
52.5°	2.7	2.7	2.8	2.5	2.4
55°	2.4	2.4	2.4	2.2	2.1
57.5°	1.9	2.1	2.1	1.9	1.8
60°	1.6	1.6	1.8	1.6	1.5
62.5°	1.3	1.3	1.3	1.3	1.2
65°	0.9	0.9	1.0	0.9	0.7
67.5°	0.1	0.3	0.7	0.0	0.0
70°	0.0	0.0	0.1	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)