

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225387

Luminaire Tested: **LSSQ2B10FL409024D010 2LBDC\*MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P225387  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14834)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQ2B10FL409024D010 2LBDC\*MB  
Description: 1000 Lumen, 2inch Portfolio LED Cylinder  
FLOOD OPTIC  
CAST ROUND TRIM WITH MATTE BLACK FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 728.5 lumens  
Efficiency: N/A  
Efficacy: 70.7 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.6  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P225387

CATALOG NUMBER: LSSQ2B10FL409024D010 2LBDC\*MB

### Luminous Intensity Polar Plot

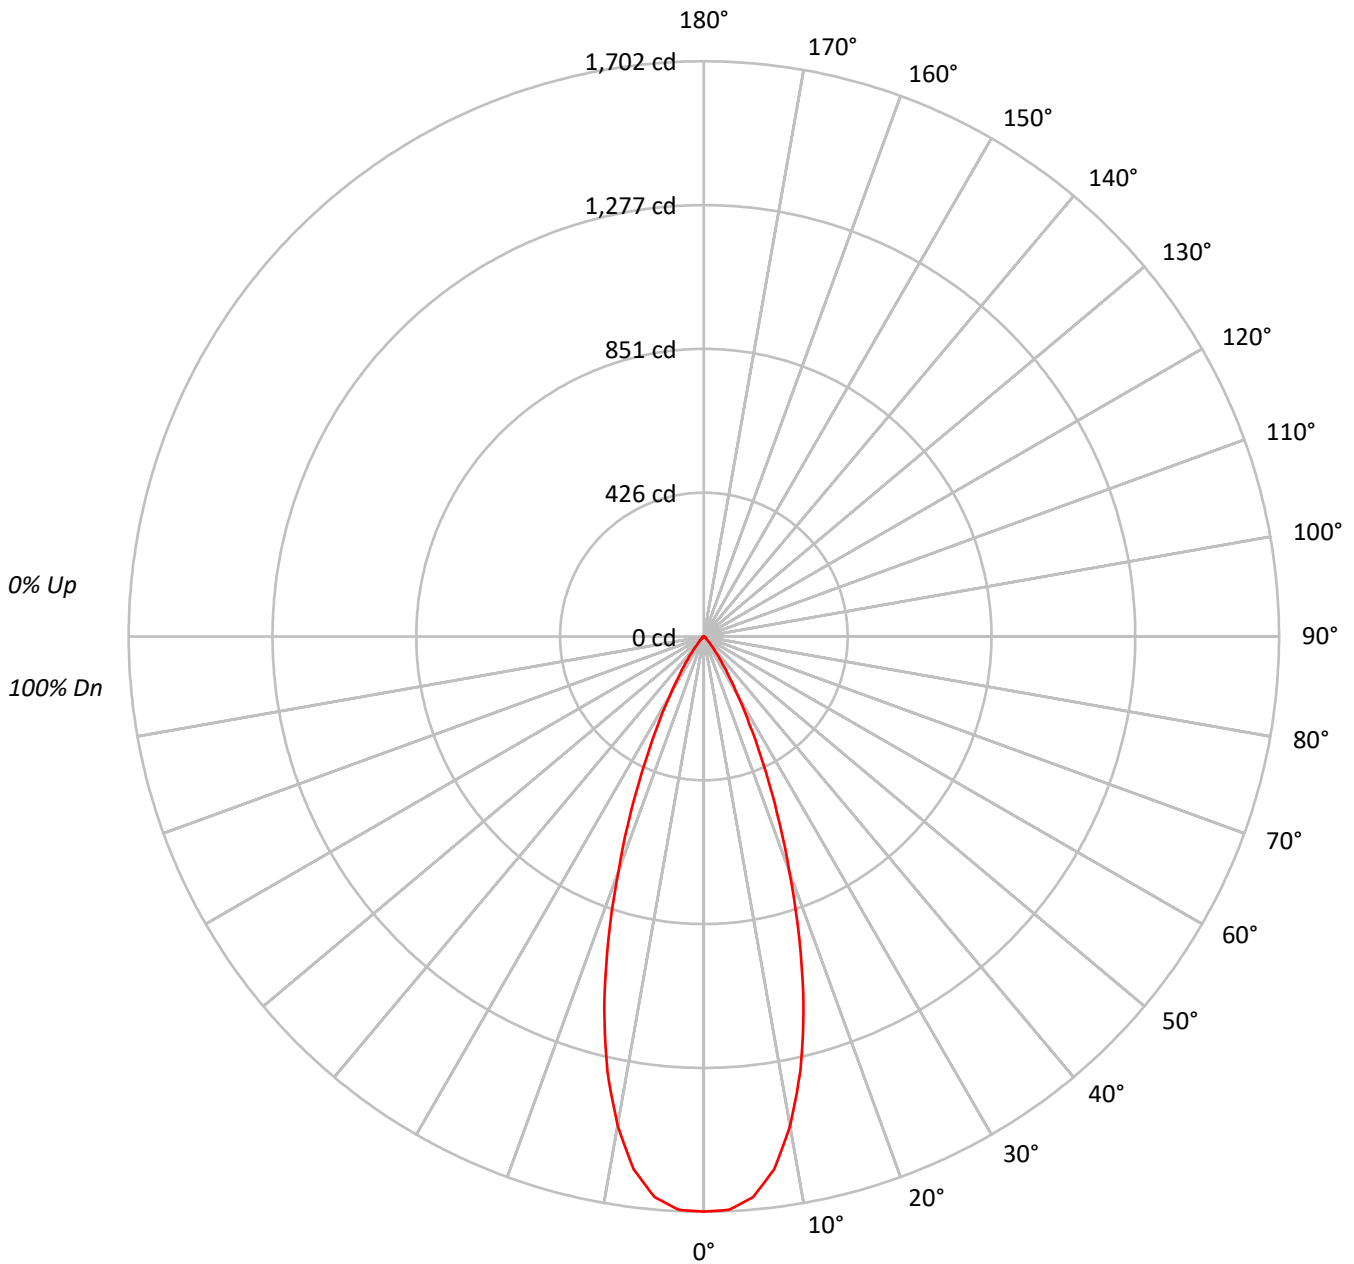



TEST NUMBER: P225387

CATALOG NUMBER: LSSQ2B10FL409024D010 2LBDC\*MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	96	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87	87	87	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83	83	83	83
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79	79	79	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76	76	76	76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72	72	72	72
8	87	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	69	69	69	69
9	84	77	72	69	83	76	72	68	75	71	68	74	71	68	74	70	68	67	67	67	67
10	82	74	69	66	81	73	69	66	73	68	65	72	68	65	71	68	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	659147
5°	647667
10°	577789
15°	456710
20°	304537
25°	176683
30°	88425
35°	41612
40°	16282
45°	7231
50°	3435
55°	1891
60°	697
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225387

CATALOG NUMBER: LSSQ2B10FL409024D010 2LBDC\*MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	152.7	21.0
10°-20°	308.3	42.3
20°-30°	193.9	26.6
30°-40°	59.3	8.1
40°-50°	11.6	1.6
50°-60°	2.6	0.4
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	654.9	89.9
0°-40°	714.2	98.0
0°-60°	728.4	100.0
0°-90°	728.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	728.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1702	
5°	1666	153
15°	1139	308
25°	413	194
35°	88	59
45°	13	12
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225387

CATALOG NUMBER: LSSQ2B10FL409024D010 2LBDC\*MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1701.7
2.5°	1697.9
5°	1665.7
7.5°	1590.1
10°	1469.0
12.5°	1317.6
15°	1138.9
17.5°	940.2
20°	738.8
22.5°	566.6
25°	413.4
27.5°	291.3
30°	197.7
32.5°	133.4
35°	88.0
37.5°	53.9
40°	32.2
42.5°	20.8
45°	13.2
47.5°	8.5
50°	5.7
52.5°	3.8
55°	2.8
57.5°	1.9
60°	0.9
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)