

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B10WFL559035D010 2LBD\*GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14806)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQWM2B10WFL559035D010 2LBD\*GPH  
Description: 1000 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH GRAPHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 792.5 lumens  
Efficiency: N/A  
Efficacy: 76.9 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSSQWM2B10WFL559035D010 2LBD\*GPH

### Luminous Intensity Polar Plot

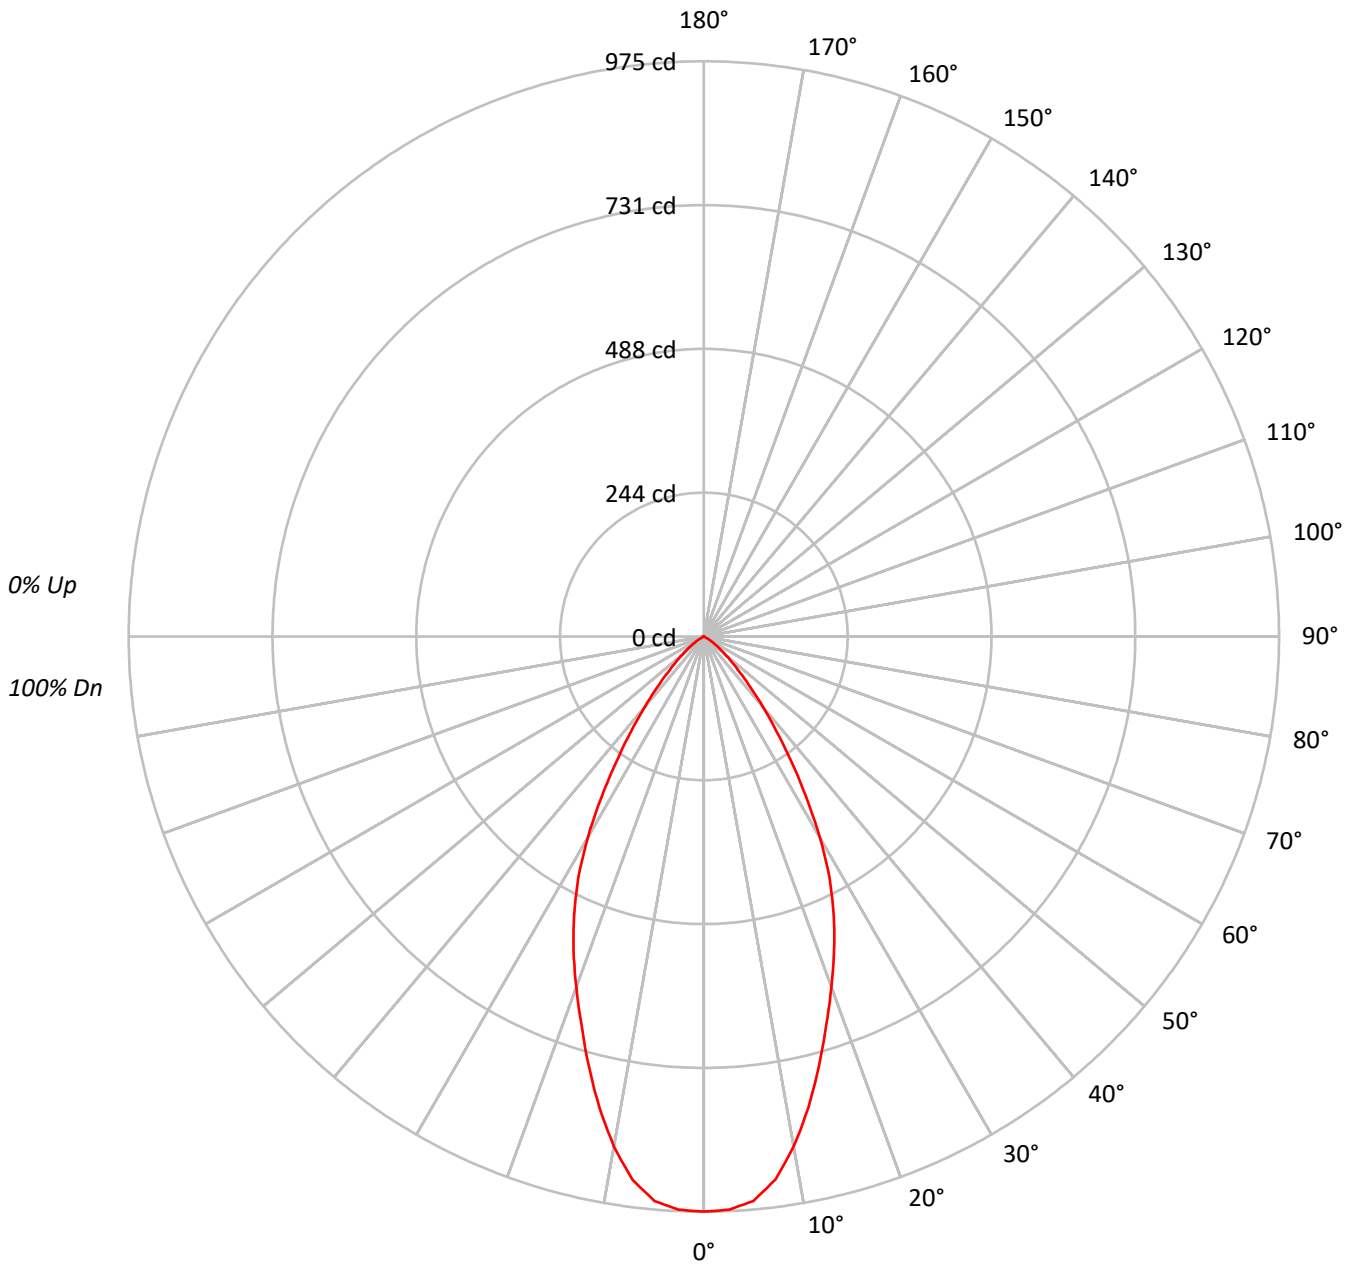



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559035D010 2LBD\*GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69			
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64			
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	74	64	59	55	63	58	54	62	58	54	62	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	377585
5°	373467
10°	345179
15°	302281
20°	260596
25°	222499
30°	176000
35°	121762
40°	78779
45°	47822
50°	27961
55°	15667
60°	5965
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559035D010 2LBD\*GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	89.0	11.2
10°-20°	210.1	26.5
20°-30°	236.5	29.8
30°-40°	163.1	20.6
40°-50°	70.4	8.9
50°-60°	21.9	2.8
60°-70°	1.5	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	535.6	67.6
0°-40°	698.7	88.2
0°-60°	791.0	99.8
0°-90°	792.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	792.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	975	
5°	960	89
15°	754	210
25°	521	236
35°	258	163
45°	87	70
55°	23	22
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559035D010 2LBD\*GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	974.8
2.5°	972.6
5°	960.5
7.5°	928.4
10°	877.6
12.5°	817.9
15°	753.8
17.5°	689.7
20°	632.2
22.5°	576.9
25°	520.6
27.5°	460.9
30°	393.5
32.5°	322.7
35°	257.5
37.5°	202.3
40°	155.8
42.5°	117.2
45°	87.3
47.5°	64.1
50°	46.4
52.5°	33.2
55°	23.2
57.5°	15.5
60°	7.7
62.5°	2.2
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)