

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224774

Luminaire Tested: **LSR2B15FL409024D010 2LBDL\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P224774  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR2B15FL409024D010 2LBDL\*MW  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 924.9 lumens  
Efficiency: N/A  
Efficacy: 64.7 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P224774

CATALOG NUMBER: LSR2B15FL409024D010 2LBDL\*MW

### Luminous Intensity Polar Plot

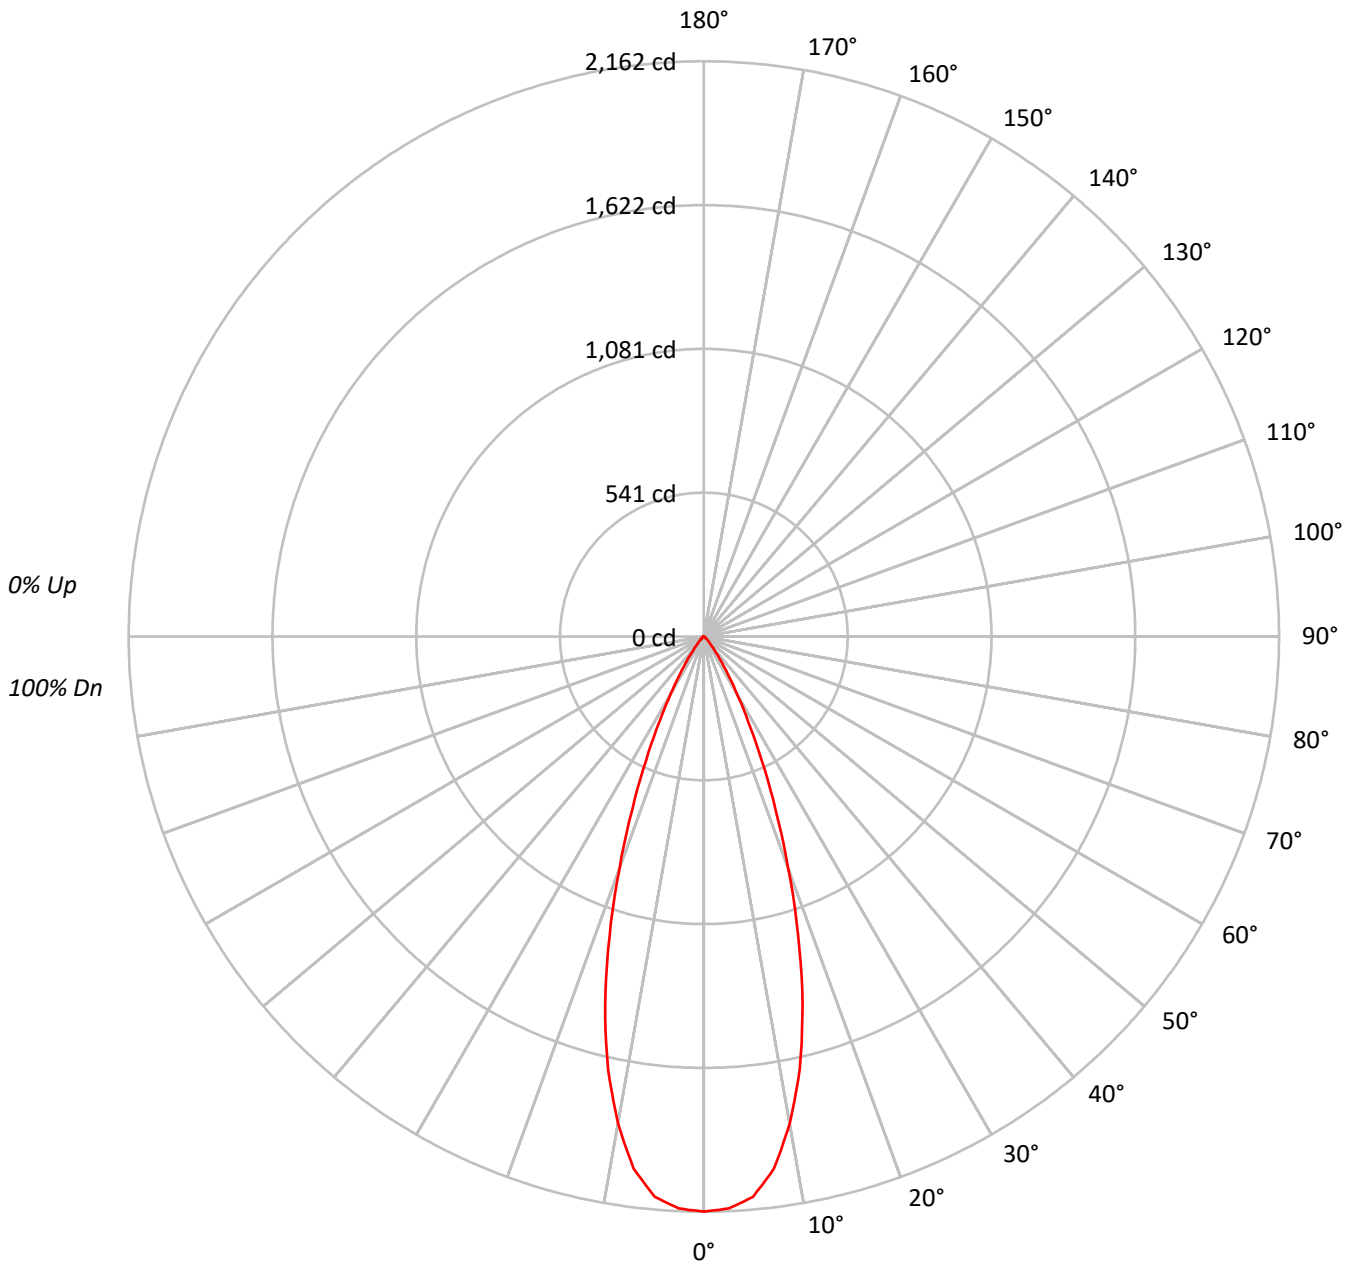



TEST NUMBER: P224774

CATALOG NUMBER: LSR2B15FL409024D010 2LBDL\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86	86	86	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82	82	82	82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79	79	79	79
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	837326
5°	822055
10°	730791
15°	574728
20°	382444
25°	219550
30°	110923
35°	52157
40°	20984
45°	10408
50°	5725
55°	3984
60°	3641
65°	2200
70°	2718
75°	1796
80°	2677
85°	0



TEST NUMBER: P224774

CATALOG NUMBER: LSR2B15FL409024D010 2LBDL\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.6	20.9
10°-20°	388.2	42.0
20°-30°	241.5	26.1
30°-40°	74.2	8.0
40°-50°	16.3	1.8
50°-60°	5.8	0.6
60°-70°	3.0	0.3
70°-80°	1.7	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	823.4	89.0
0°-40°	897.6	97.0
0°-60°	919.8	99.4
0°-90°	924.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	924.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2162	
5°	2114	194
15°	1433	388
25°	514	242
35°	110	74
45°	19	16
55°	6	6
65°	2	3
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P224774

CATALOG NUMBER: LSR2B15FL409024D010 2LBDL\*MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2161.7
2.5°	2152.2
5°	2114.2
7.5°	2018.1
10°	1858.0
12.5°	1665.8
15°	1433.2
17.5°	1179.3
20°	927.8
22.5°	703.6
25°	513.7
27.5°	361.9
30°	248.0
32.5°	167.3
35°	110.3
37.5°	66.4
40°	41.5
42.5°	28.5
45°	19.0
47.5°	13.1
50°	9.5
52.5°	8.3
55°	5.9
57.5°	4.7
60°	4.7
62.5°	3.6
65°	2.4
67.5°	2.4
70°	2.4
72.5°	2.4
75°	1.2
77.5°	1.2
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)