

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSRWM2B15WFL559024D010 2LBDL\*WMH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14805)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSRWM2B15WFL559024D010 2LBDL\*WMH  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH WHEAT METALLIC HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 856.6 lumens  
Efficiency: N/A  
Efficacy: 59.9 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSRWM2B15WFL559024D010 2LBDL\*WMH

### Luminous Intensity Polar Plot

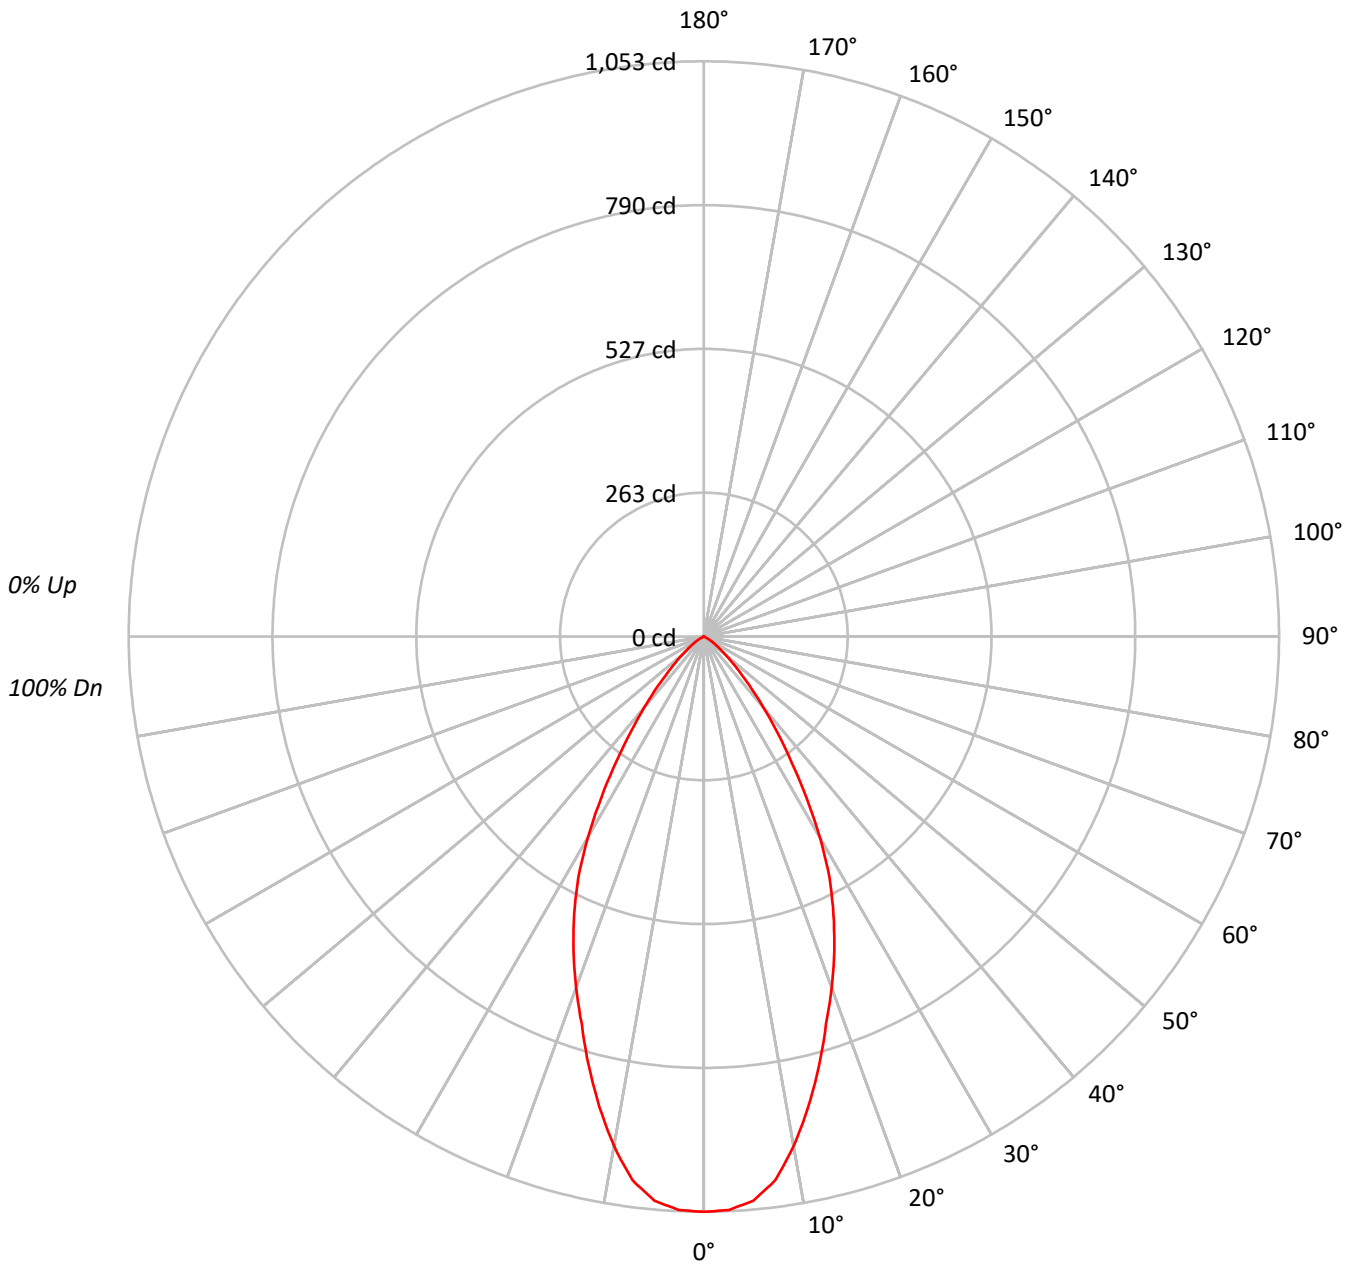



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B15WFL559024D010 2LBDL\*WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	78	86	81	78	84	80	77	82	78	76	74			
5	92	83	77	73	90	82	77	72	80	75	72	79	74	71	77	73	70	69			
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64			
7	82	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	407953
5°	403095
10°	372593
15°	326543
20°	281825
25°	239893
30°	190000
35°	131881
40°	85707
45°	51547
50°	29769
55°	16680
60°	7282
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B15WFL559024D010 2LBDL\*WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.1	11.2
10°-20°	226.9	26.5
20°-30°	255.4	29.8
30°-40°	176.4	20.6
40°-50°	76.4	8.9
50°-60°	23.7	2.8
60°-70°	1.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	578.4	67.5
0°-40°	754.8	88.1
0°-60°	854.9	99.8
0°-90°	856.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	856.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1053	
5°	1037	96
15°	814	227
25°	561	255
35°	279	176
45°	94	76
55°	25	24
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B15WFL559024D010 2LBDL\*WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1053.2
2.5°	1050.8
5°	1036.7
7.5°	1003.8
10°	947.3
12.5°	882.6
15°	814.3
17.5°	743.7
20°	683.7
22.5°	623.7
25°	561.3
27.5°	497.8
30°	424.8
32.5°	348.3
35°	278.9
37.5°	218.9
40°	169.5
42.5°	128.3
45°	94.1
47.5°	69.4
50°	49.4
52.5°	35.3
55°	24.7
57.5°	17.7
60°	9.4
62.5°	2.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)