

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225305

Luminaire Tested: **LSSQ2B15FL409024D010 2LBDC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225305
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQ2B15FL409024D010 2LBDC*MMS
Description: 1500 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 993.1 lumens
Efficiency: N/A
Efficacy: 69.4 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225305

CATALOG NUMBER: LSSQ2B15FL409024D010 2LBDC*MMS

Luminous Intensity Polar Plot

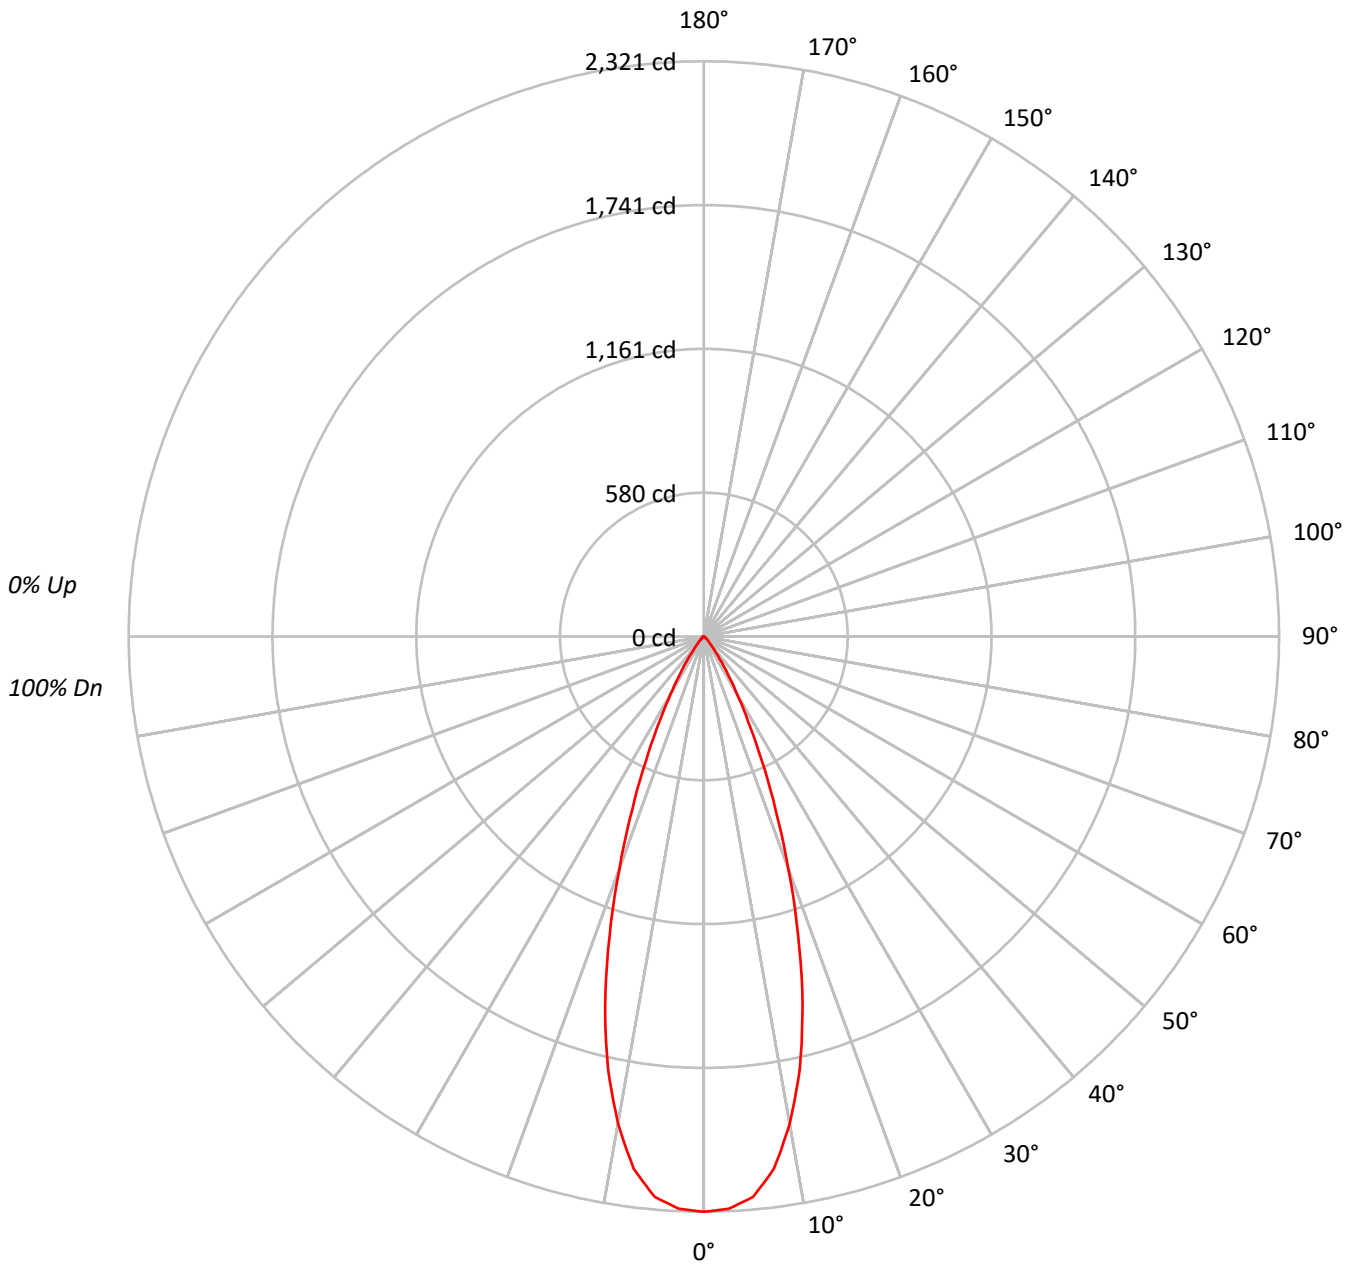



TEST NUMBER: P225305

CATALOG NUMBER: LSSQ2B15FL409024D010 2LBDC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86	86	86	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82	82	82	82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	84	80	77	83	80	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	899069
5°	882673
10°	784676
15°	617114
20°	410639
25°	235748
30°	119063
35°	56034
40°	22552
45°	11175
50°	6147
55°	4322
60°	3951
65°	2291
70°	2831
75°	1946
80°	2900
85°	0



TEST NUMBER: P225305

CATALOG NUMBER: LSSQ2B15FL409024D010 2LBDC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.9	20.9
10°-20°	416.9	42.0
20°-30°	259.3	26.1
30°-40°	79.7	8.0
40°-50°	17.5	1.8
50°-60°	6.2	0.6
60°-70°	3.1	0.3
70°-80°	1.8	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	884.1	89.0
0°-40°	963.8	97.1
0°-60°	987.6	99.4
0°-90°	993.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	993.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2321	
5°	2270	208
15°	1539	417
25°	552	259
35°	118	80
45°	20	18
55°	6	6
65°	2	3
75°	1	2
85°	0	1
90°	0	



TEST NUMBER: P225305

CATALOG NUMBER: LSSQ2B15FL409024D010 2LBDC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	2321.1
2.5°	2310.9
5°	2270.1
7.5°	2166.9
10°	1995.0
12.5°	1788.6
15°	1538.9
17.5°	1266.3
20°	996.2
22.5°	755.4
25°	551.6
27.5°	388.5
30°	266.2
32.5°	179.6
35°	118.5
37.5°	71.3
40°	44.6
42.5°	30.6
45°	20.4
47.5°	14.0
50°	10.2
52.5°	8.9
55°	6.4
57.5°	5.1
60°	5.1
62.5°	3.8
65°	2.5
67.5°	2.5
70°	2.5
72.5°	2.5
75°	1.3
77.5°	1.3
80°	1.3
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)