

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2B15WFL559727D010 2LBDC\*MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14809)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR2B15WFL559727D010 2LBDC\*MB  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
CAST ROUND TRIM WITH MATTE BLACK FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 883.6 lumens  
Efficiency: N/A  
Efficacy: 61.8 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSR2B15WFL559727D010 2LBDC\*MB

### Luminous Intensity Polar Plot

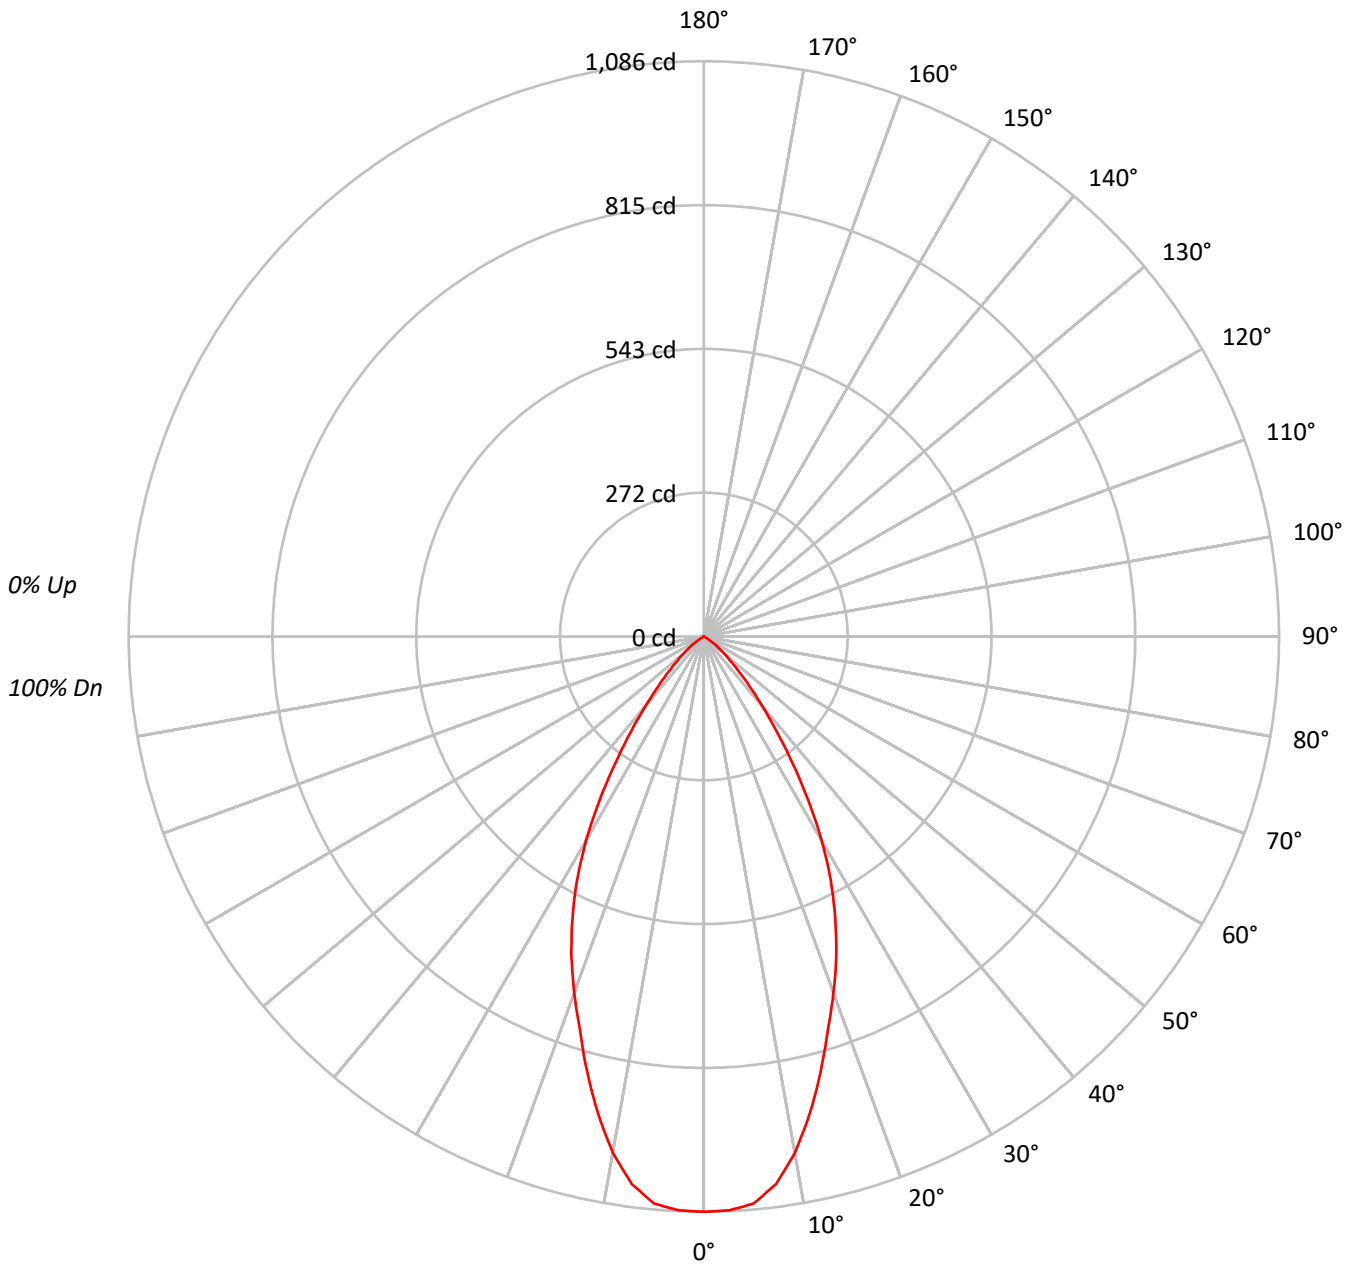



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15WFL559727D010 2LBDC\*MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93																											
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																											
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																											
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																											
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																											
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																											
7	83	73	67	63	81	73	67	63	71	66	63	70	66	62	69	65	62	60																											
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57																											
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53																											
10	71	62	56	52	70	61	56	52	60	55	52	60	55	52	59	55	51	50																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	420658
5°	417910
10°	389231
15°	341340
20°	294850
25°	250792
30°	198945
35°	137272
40°	86212
45°	51437
50°	29769
55°	14992
60°	930
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15WFL559727D010 2LBDC\*MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.8	11.3
10°-20°	237.2	26.9
20°-30°	267.0	30.2
30°-40°	183.5	20.8
40°-50°	76.2	8.6
50°-60°	19.6	2.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	604.1	68.4
0°-40°	787.6	89.1
0°-60°	883.4	100.0
0°-90°	883.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	883.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1086	
5°	1075	100
15°	851	237
25°	587	267
35°	290	183
45°	94	76
55°	22	20
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15WFL559727D010 2LBDC\*MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1086.0
2.5°	1084.7
5°	1074.8
7.5°	1042.7
10°	989.6
12.5°	922.9
15°	851.2
17.5°	778.3
20°	715.3
22.5°	653.6
25°	586.8
27.5°	518.9
30°	444.8
32.5°	365.7
35°	290.3
37.5°	226.1
40°	170.5
42.5°	128.5
45°	93.9
47.5°	67.9
50°	49.4
52.5°	34.6
55°	22.2
57.5°	7.4
60°	1.2
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)