

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSRWM2B15WFL559727D010 2LBDLC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14811)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSRWM2B15WFL559727D010 2LBDLC\*MMS  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 815.3 lumens  
Efficiency: N/A  
Efficacy: 57.0 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSRWM2B15WFL559727D010 2LBDLC\*MMS

### Luminous Intensity Polar Plot

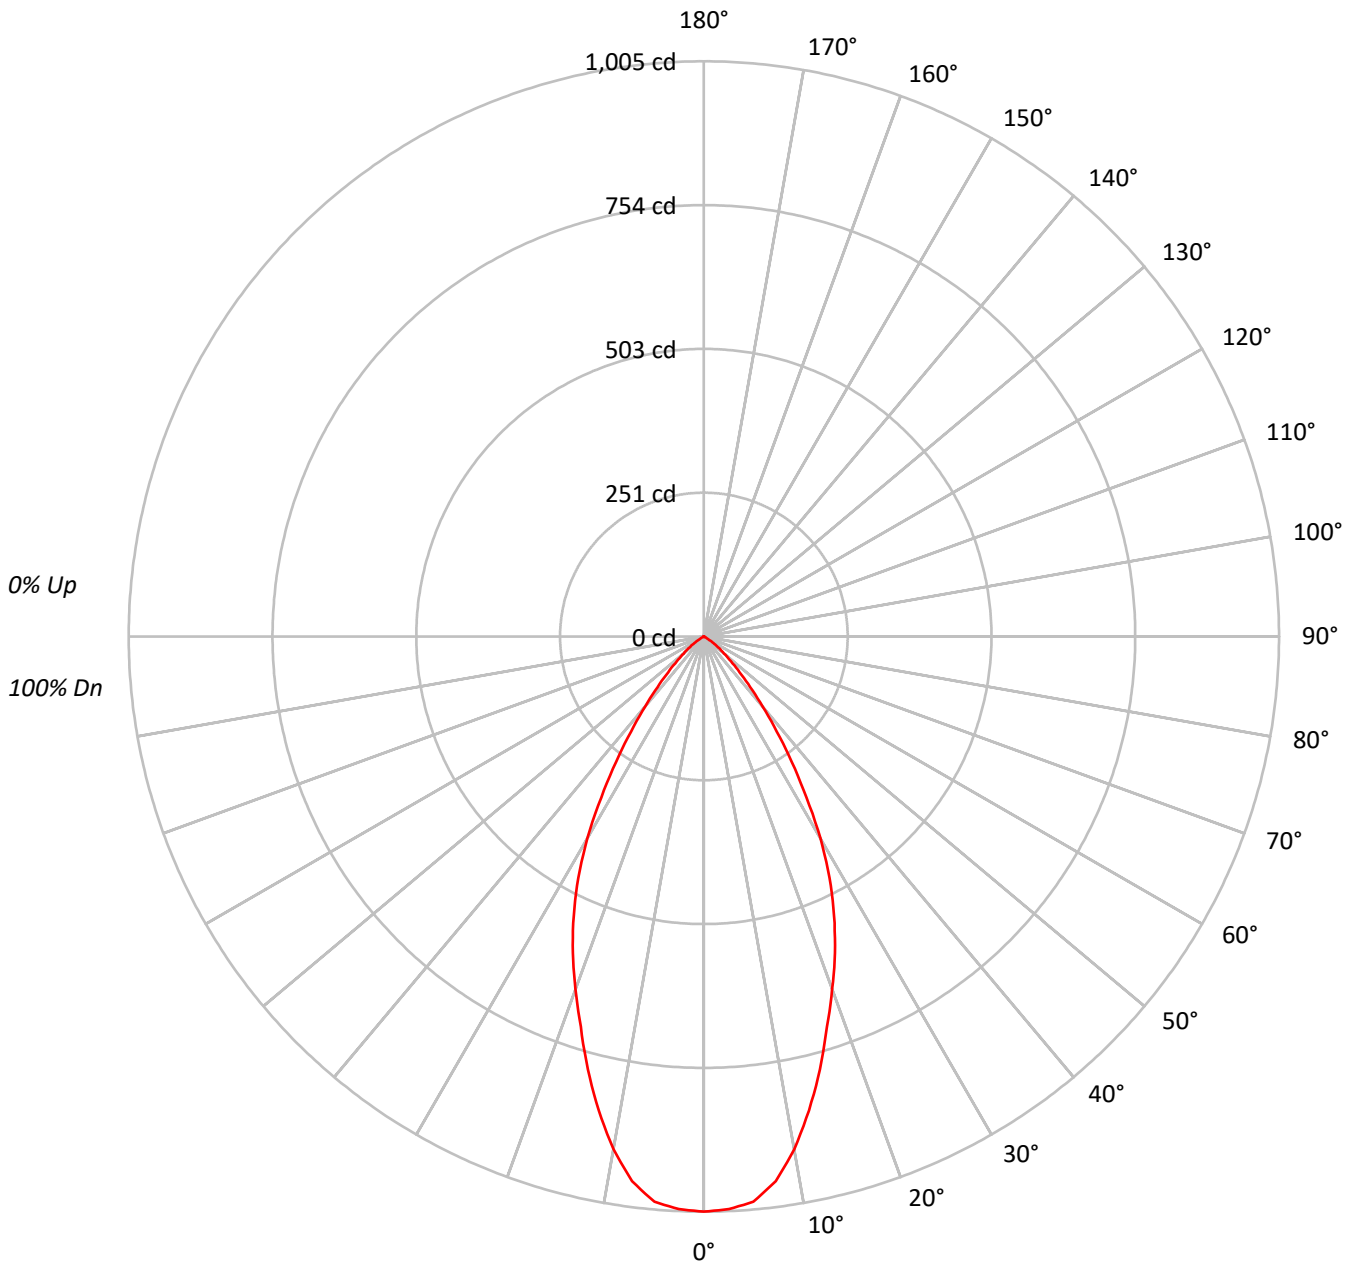



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B15WFL559727D010 2LBDLC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	84	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74		
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69		
6	87	78	72	68	86	77	72	67	76	71	67	74	70	66	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	62	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	389244
5°	385482
10°	357844
15°	314111
20°	270283
25°	230021
30°	182173
35°	126443
40°	80347
45°	48425
50°	27659
55°	15127
60°	1704
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B15WFL559727D010 2LBDLC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	92.0	11.3
10°-20°	218.0	26.7
20°-30°	244.7	30.0
30°-40°	168.7	20.7
40°-50°	71.3	8.7
50°-60°	20.1	2.5
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	554.7	68.0
0°-40°	723.4	88.7
0°-60°	814.8	99.9
0°-90°	815.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	815.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1005	
5°	991	92
15°	783	218
25°	538	245
35°	267	169
45°	88	71
55°	22	20
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B15WFL559727D010 2LBDLC\*MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1004.9
2.5°	1001.5
5°	991.4
7.5°	960.1
10°	909.8
12.5°	848.2
15°	783.3
17.5°	715.0
20°	655.7
22.5°	598.7
25°	538.2
27.5°	475.6
30°	407.3
32.5°	333.5
35°	267.4
37.5°	209.3
40°	158.9
42.5°	119.7
45°	88.4
47.5°	63.8
50°	45.9
52.5°	33.6
55°	22.4
57.5°	11.2
60°	2.2
62.5°	1.1
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)