

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B15WFL559727D010 2LBD\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQWM2B15WFL559727D010 2LBD\*MW  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 912.2 lumens  
Efficiency: N/A  
Efficacy: 63.8 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559727D010 2LBD\*MW

### Luminous Intensity Polar Plot

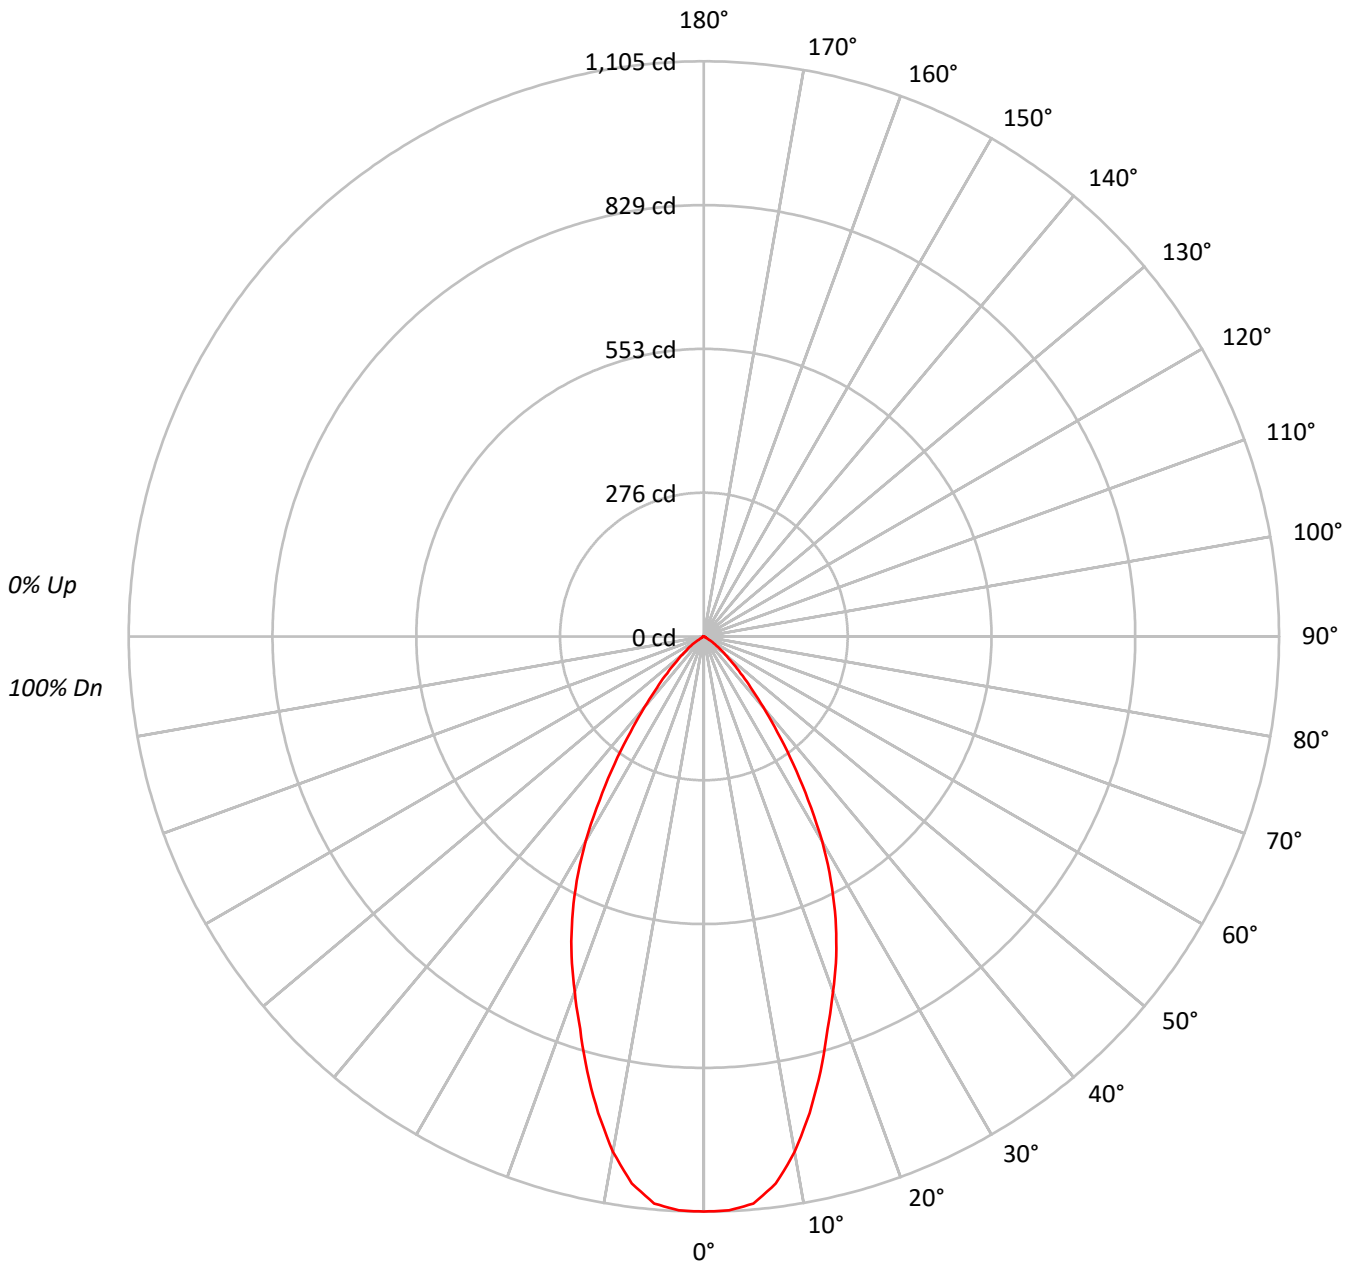



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559727D010 2LBD\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93		
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86		
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80		
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74		
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69		
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64		
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60		
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56		
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53		
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	427940
5°	425220
10°	395327
15°	347034
20°	299137
25°	255835
30°	203015
35°	141528
40°	89550
45°	54669
50°	32300
55°	17693
60°	3873
65°	3391
70°	2831
75°	3741
80°	2677
85°	5333



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559727D010 2LBD\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	101.5	11.1
10°-20°	241.0	26.4
20°-30°	271.9	29.8
30°-40°	188.1	20.6
40°-50°	80.2	8.8
50°-60°	23.2	2.5
60°-70°	3.4	0.4
70°-80°	2.1	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	614.4	67.4
0°-40°	802.5	88.0
0°-60°	905.9	99.3
0°-90°	912.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	912.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1105	
5°	1094	101
15°	865	241
25°	599	272
35°	299	188
45°	100	80
55°	26	23
65°	4	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559727D010 2LBD\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1104.8
2.5°	1103.6
5°	1093.6
7.5°	1059.9
10°	1005.1
12.5°	937.7
15°	865.4
17.5°	790.6
20°	725.7
22.5°	664.6
25°	598.6
27.5°	528.7
30°	453.9
32.5°	372.8
35°	299.3
37.5°	231.9
40°	177.1
42.5°	133.4
45°	99.8
47.5°	72.3
50°	53.6
52.5°	38.7
55°	26.2
57.5°	11.2
60°	5.0
62.5°	3.7
65°	3.7
67.5°	2.5
70°	2.5
72.5°	2.5
75°	2.5
77.5°	1.2
80°	1.2
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)