

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2B15FL409030D010 2LBD\*LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29152)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR2B15FL409030D010 2LBD\*LI  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
FLOOD OPTIC  
SPUN ROUND TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1117.0 lumens  
Efficiency: N/A  
Efficacy: 78.1 lumens/watt  
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSR2B15FL409030D010 2LBD\*LI

### Luminous Intensity Polar Plot

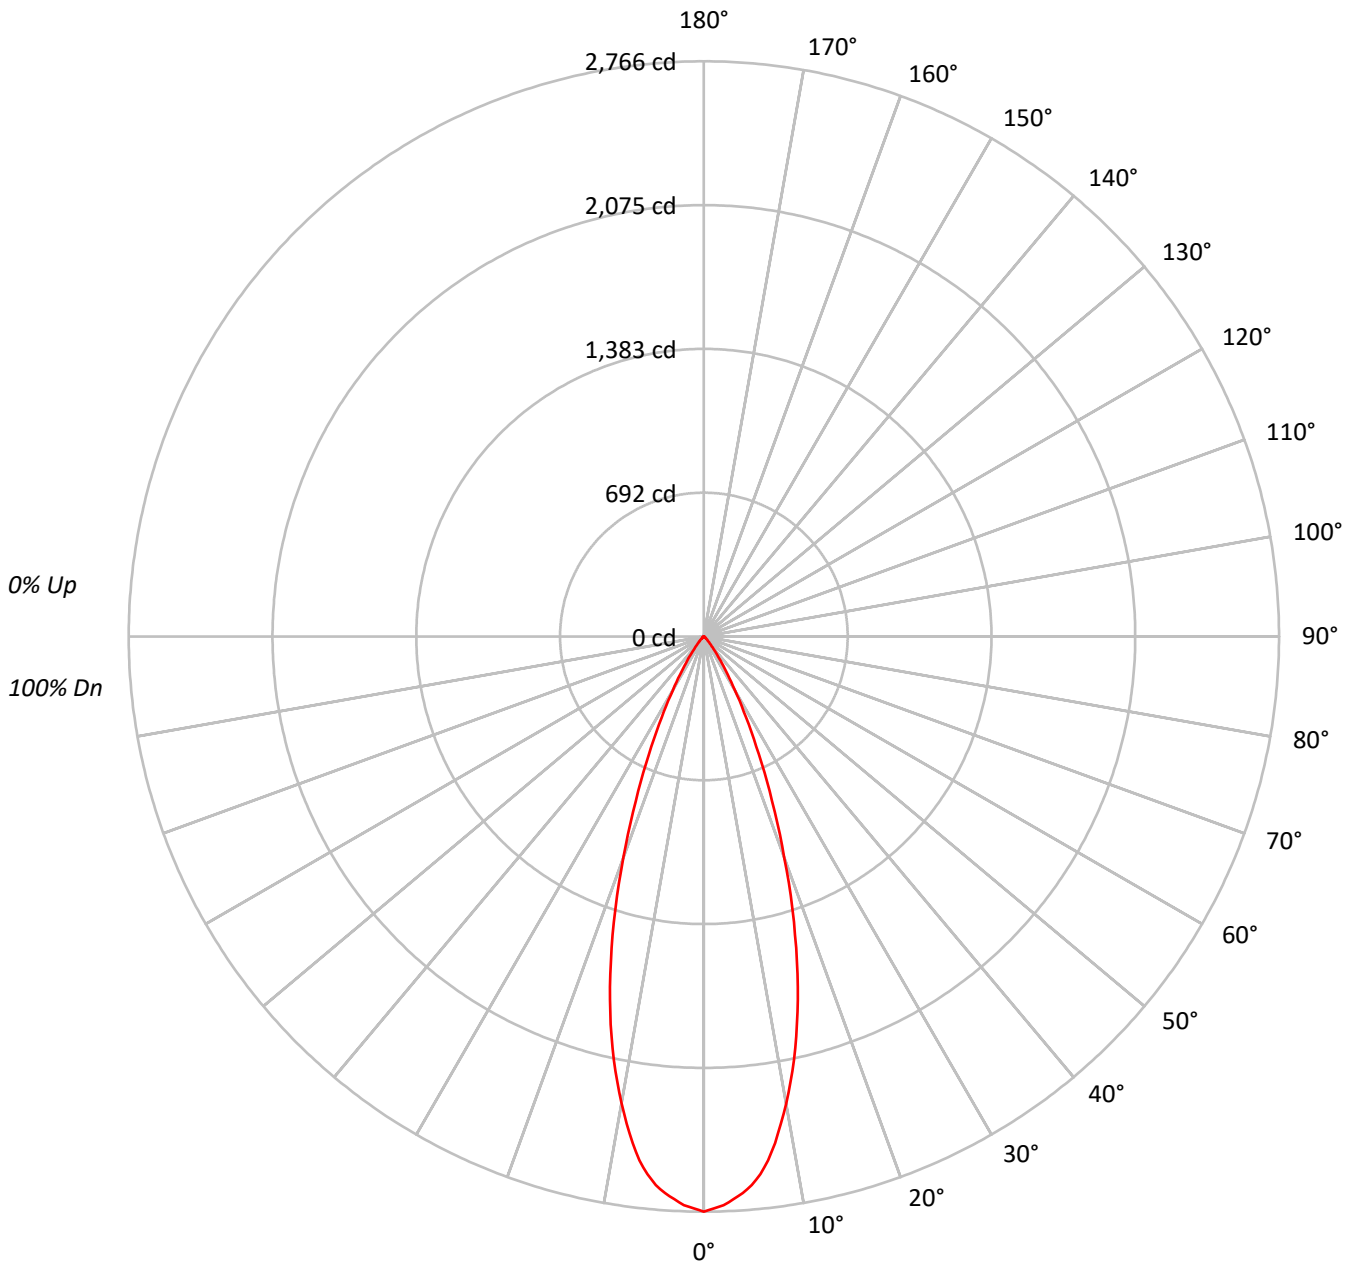



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15FL409030D010 2LBD\*LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1071476
5°	1029688
10°	896340
15°	699923
20°	465503
25°	266563
30°	132526
35°	60905
40°	24423
45°	11175
50°	5182
55°	2904
60°	1627
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15FL409030D010 2LBD\*LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	241.0	21.6
10°-20°	473.3	42.4
20°-30°	292.9	26.2
30°-40°	87.7	7.8
40°-50°	17.6	1.6
50°-60°	4.3	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1007.3	90.2
0°-40°	1094.9	98.0
0°-60°	1116.8	100.0
0°-90°	1117.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1117.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2766	
5°	2648	241
15°	1745	473
25°	624	293
35°	129	88
45°	20	18
55°	4	4
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15FL409030D010 2LBD\*LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2766.2
1°	2751.2
2°	2737.3
3°	2709.3
4°	2683.6
5°	2648.2
6°	2599.9
7°	2538.7
8°	2460.3
9°	2371.2
10°	2278.9
11°	2183.4
12°	2081.4
13°	1975.1
14°	1861.3
15°	1745.4
17.5°	1439.5
20°	1129.3
22.5°	854.5
25°	623.7
27.5°	438.0
30°	296.3
32.5°	195.4
35°	128.8
37.5°	80.5
40°	48.3
42.5°	31.1
45°	20.4
47.5°	12.9
50°	8.6
52.5°	6.4
55°	4.3
57.5°	3.2
60°	2.1
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B15FL409030D010 2LBD\*LI

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)