

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B15FL409040D010 2LBD\*LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29152)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQWM2B15FL409040D010 2LBD\*LI  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
FLOOD OPTIC  
SPUN ROUND TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1185.3 lumens  
Efficiency: N/A  
Efficacy: 82.9 lumens/watt  
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSSQWM2B15FL409040D010 2LBD\*LI

### Luminous Intensity Polar Plot

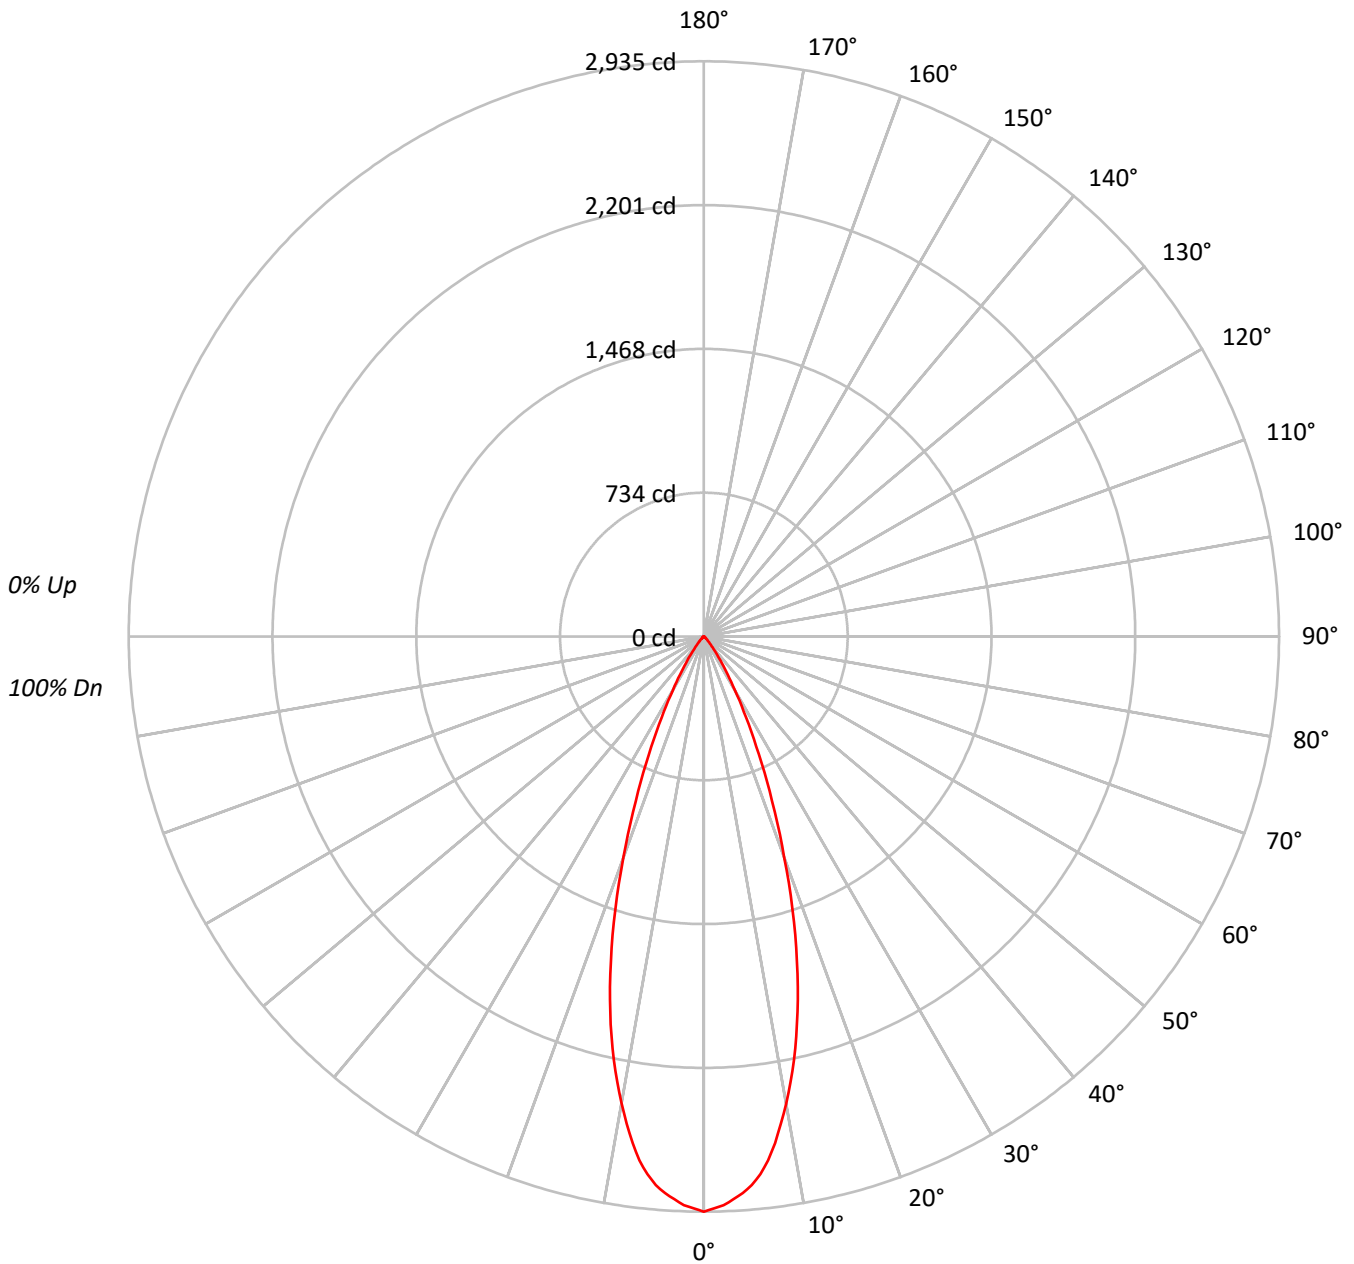



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15FL409040D010 2LBD\*LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96																			
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91																			
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87																			
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83																			
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79																			
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76																			
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73																			
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70																			
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67																			
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1137015
5°	1092639
10°	951130
15°	742711
20°	493945
25°	282846
30°	140621
35°	64640
40°	25940
45°	11832
50°	5484
55°	3106
60°	1782
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15FL409040D010 2LBD\*LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	255.8	21.6
10°-20°	502.2	42.4
20°-30°	310.8	26.2
30°-40°	93.0	7.8
40°-50°	18.6	1.6
50°-60°	4.5	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1068.8	90.2
0°-40°	1161.8	98.0
0°-60°	1185.0	100.0
0°-90°	1185.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1185.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2935	
5°	2810	256
15°	1852	502
25°	662	311
35°	137	93
45°	22	19
55°	5	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15FL409040D010 2LBD\*LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2935.4
1°	2919.4
2°	2904.6
3°	2875.0
4°	2847.7
5°	2810.1
6°	2758.8
7°	2693.9
8°	2610.7
9°	2516.2
10°	2418.2
11°	2316.9
12°	2208.7
13°	2095.9
14°	1975.1
15°	1852.1
17.5°	1527.5
20°	1198.3
22.5°	906.7
25°	661.8
27.5°	464.7
30°	314.4
32.5°	207.3
35°	136.7
37.5°	85.4
40°	51.3
42.5°	33.0
45°	21.6
47.5°	13.7
50°	9.1
52.5°	6.8
55°	4.6
57.5°	3.4
60°	2.3
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15FL409040D010 2LBD\*LI

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)