

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224873

Luminaire Tested: **LSRWM2B15FL408050D010 2LBD*B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224873
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14834)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B15FL408050D010 2LBD*B
Description: 1500 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
SPUN ROUND TRIM WITH BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1416.9 lumens
Efficiency: N/A
Efficacy: 99.1 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224873

CATALOG NUMBER: LSRWM2B15FL408050D010 2LBD*B

Luminous Intensity Polar Plot

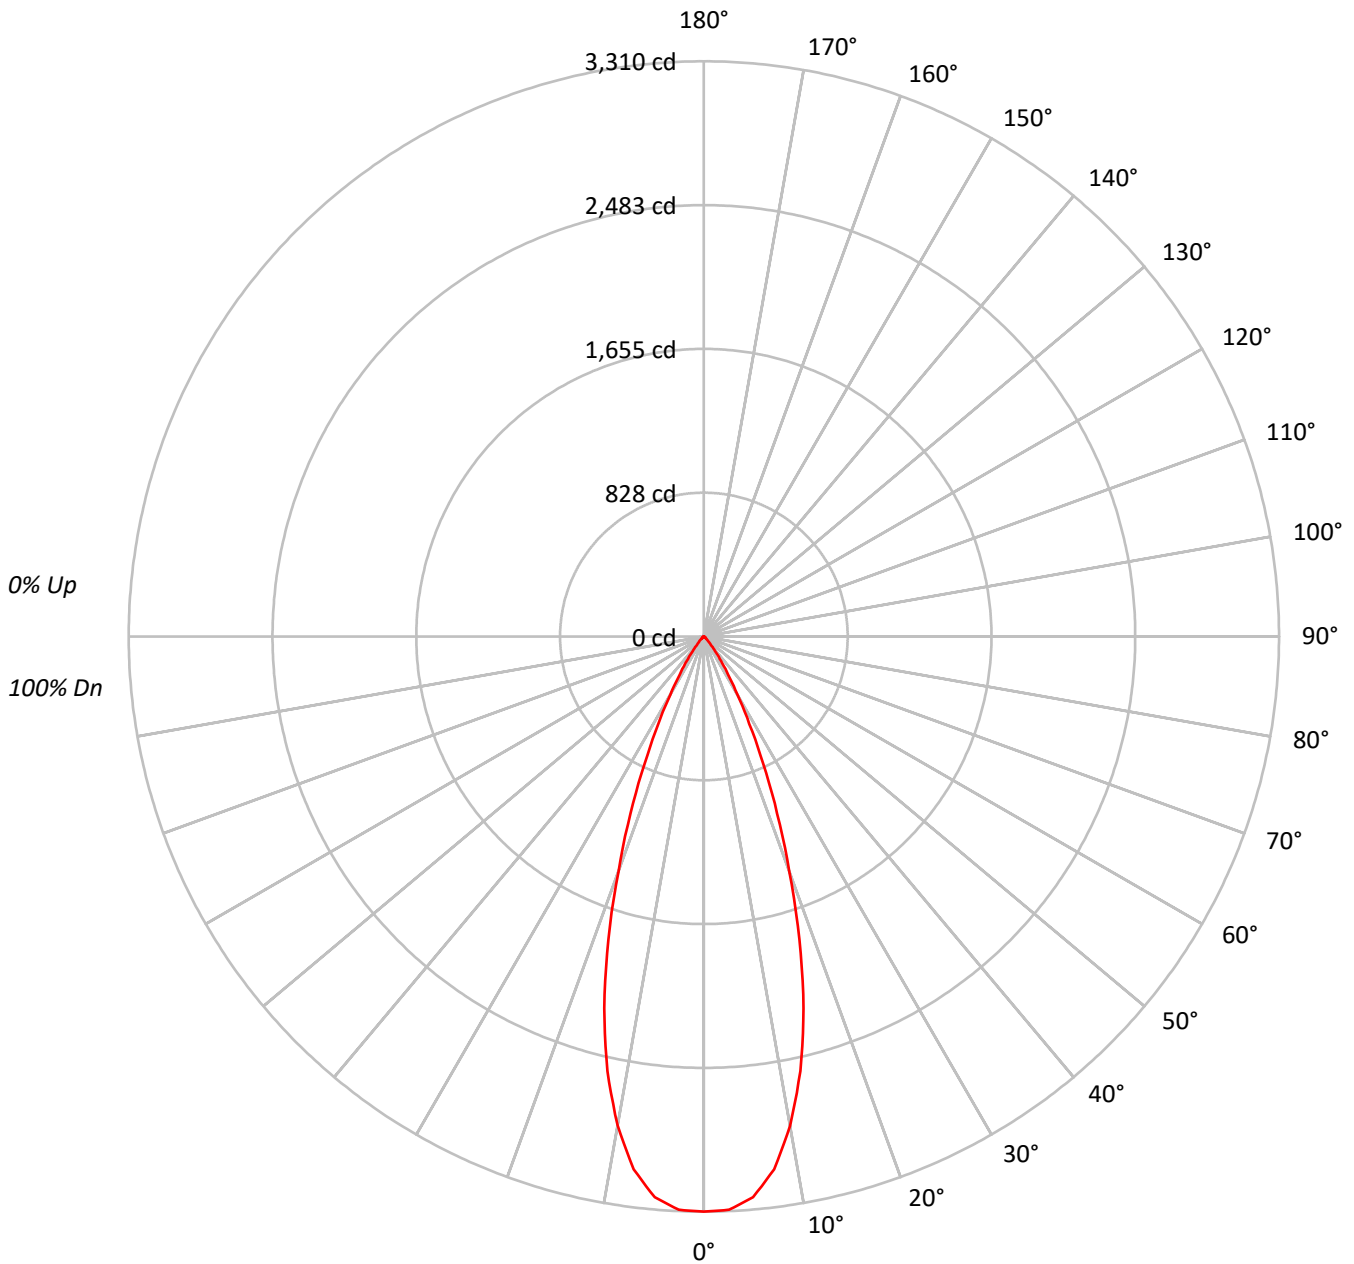



TEST NUMBER: P224873

CATALOG NUMBER: LSRWM2B15FL408050D010 2LBD*B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	96	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87	87	87	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83	83	83	83
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79	79	79	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76	76	76	76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72	72	72	72
8	87	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	69	69	69	69
9	84	77	72	69	83	76	72	68	75	71	68	74	71	68	74	70	68	67	67	67	67
10	82	74	69	66	81	73	69	66	73	68	65	72	68	65	71	68	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1281999
5°	1259717
10°	1123759
15°	888277
20°	592256
25°	343621
30°	171975
35°	80907
40°	31653
45°	14133
50°	6629
55°	3714
60°	1394
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224873

CATALOG NUMBER: LSRWM2B15FL408050D010 2LBD*B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	297.0	21.0
10°-20°	599.6	42.3
20°-30°	377.1	26.6
30°-40°	115.3	8.1
40°-50°	22.6	1.6
50°-60°	5.1	0.4
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1273.7	89.9
0°-40°	1389.0	98.0
0°-60°	1416.7	100.0
0°-90°	1416.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1416.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3310	
5°	3240	297
15°	2215	600
25°	804	377
35°	171	115
45°	26	23
55°	6	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224873

CATALOG NUMBER: LSRWM2B15FL408050D010 2LBD*B

CANDELA DISTRIBUTION (FULL):

0°	
0°	3309.7
2.5°	3302.3
5°	3239.8
7.5°	3092.6
10°	2857.1
12.5°	2562.8
15°	2215.1
17.5°	1828.7
20°	1436.8
22.5°	1102.0
25°	804.0
27.5°	566.6
30°	384.5
32.5°	259.4
35°	171.1
37.5°	104.9
40°	62.6
42.5°	40.5
45°	25.8
47.5°	16.6
50°	11.0
52.5°	7.4
55°	5.5
57.5°	3.7
60°	1.8
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)