

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B15WFL559050D010 2LBDC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSSQWM2B15WFL559050D010 2LBDC\*MW  
Description: 1500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
CAST ROUND TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1142.2 lumens  
Efficiency: N/A  
Efficacy: 79.9 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSSQWM2B15WFL559050D010 2LBDC\*MW

### Luminous Intensity Polar Plot

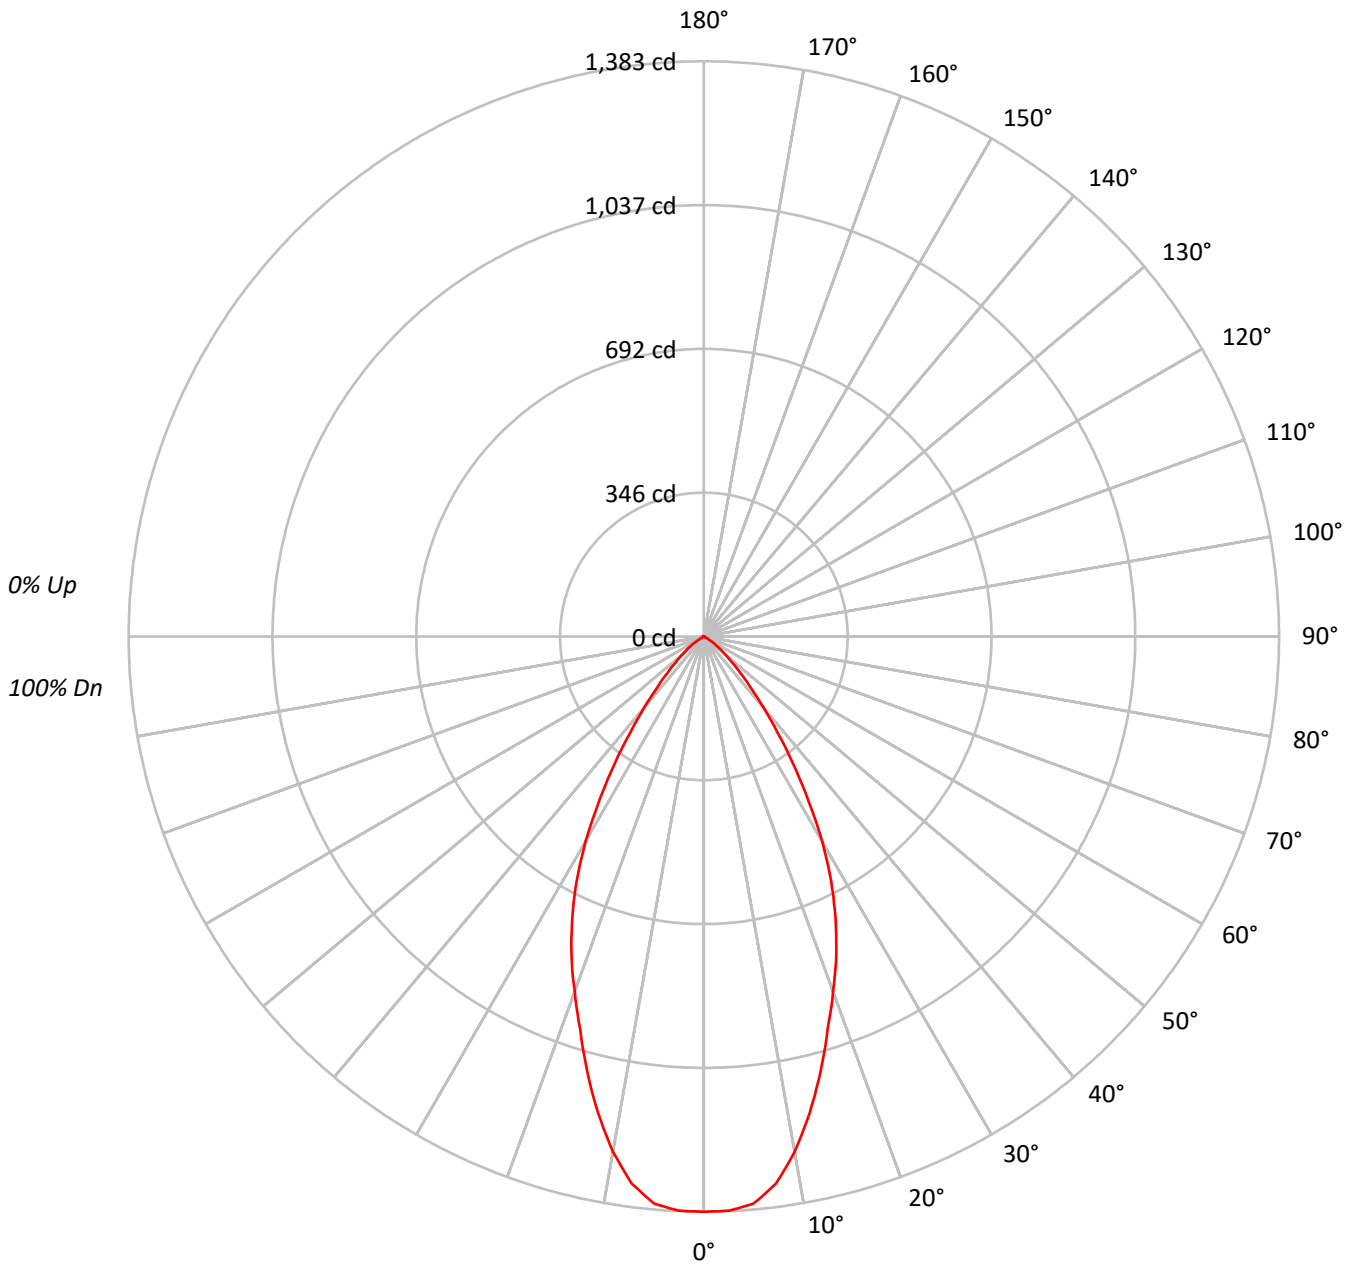



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559050D010 2LBDC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93		
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86		
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80		
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74		
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69		
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64		
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60		
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56		
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53		
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	535777
5°	532380
10°	494916
15°	434494
20°	374529
25°	320285
30°	254183
35°	177181
40°	112101
45°	68419
50°	40435
55°	22150
60°	4803
65°	4308
70°	3511
75°	4639
80°	3569
85°	7111



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559050D010 2LBDC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	127.1	11.1
10°-20°	301.8	26.4
20°-30°	340.5	29.8
30°-40°	235.5	20.6
40°-50°	100.4	8.8
50°-60°	29.0	2.5
60°-70°	4.2	0.4
70°-80°	2.7	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	769.3	67.3
0°-40°	1004.8	88.0
0°-60°	1134.2	99.3
0°-90°	1142.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1142.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1383	
5°	1369	127
15°	1084	302
25°	749	340
35°	375	236
45°	125	100
55°	33	29
65°	5	4
75°	3	3
85°	2	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B15WFL559050D010 2LBDC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1383.2
2.5°	1381.7
5°	1369.2
7.5°	1327.0
10°	1258.3
12.5°	1174.0
15°	1083.5
17.5°	989.8
20°	908.6
22.5°	832.1
25°	749.4
27.5°	662.0
30°	568.3
32.5°	466.8
35°	374.7
37.5°	290.4
40°	221.7
42.5°	167.1
45°	124.9
47.5°	90.6
50°	67.1
52.5°	48.4
55°	32.8
57.5°	14.1
60°	6.2
62.5°	4.7
65°	4.7
67.5°	3.1
70°	3.1
72.5°	3.1
75°	3.1
77.5°	1.6
80°	1.6
82.5°	1.6
85°	1.6
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)