

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2B20WFL559024D010 2LBD\*WH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14804)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR2B20WFL559024D010 2LBD\*WH  
Description: 2000 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH WHEAT HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1252.5 lumens  
Efficiency: N/A  
Efficacy: 59.9 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.81  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSR2B20WFL559024D010 2LBD\*WH

### Luminous Intensity Polar Plot

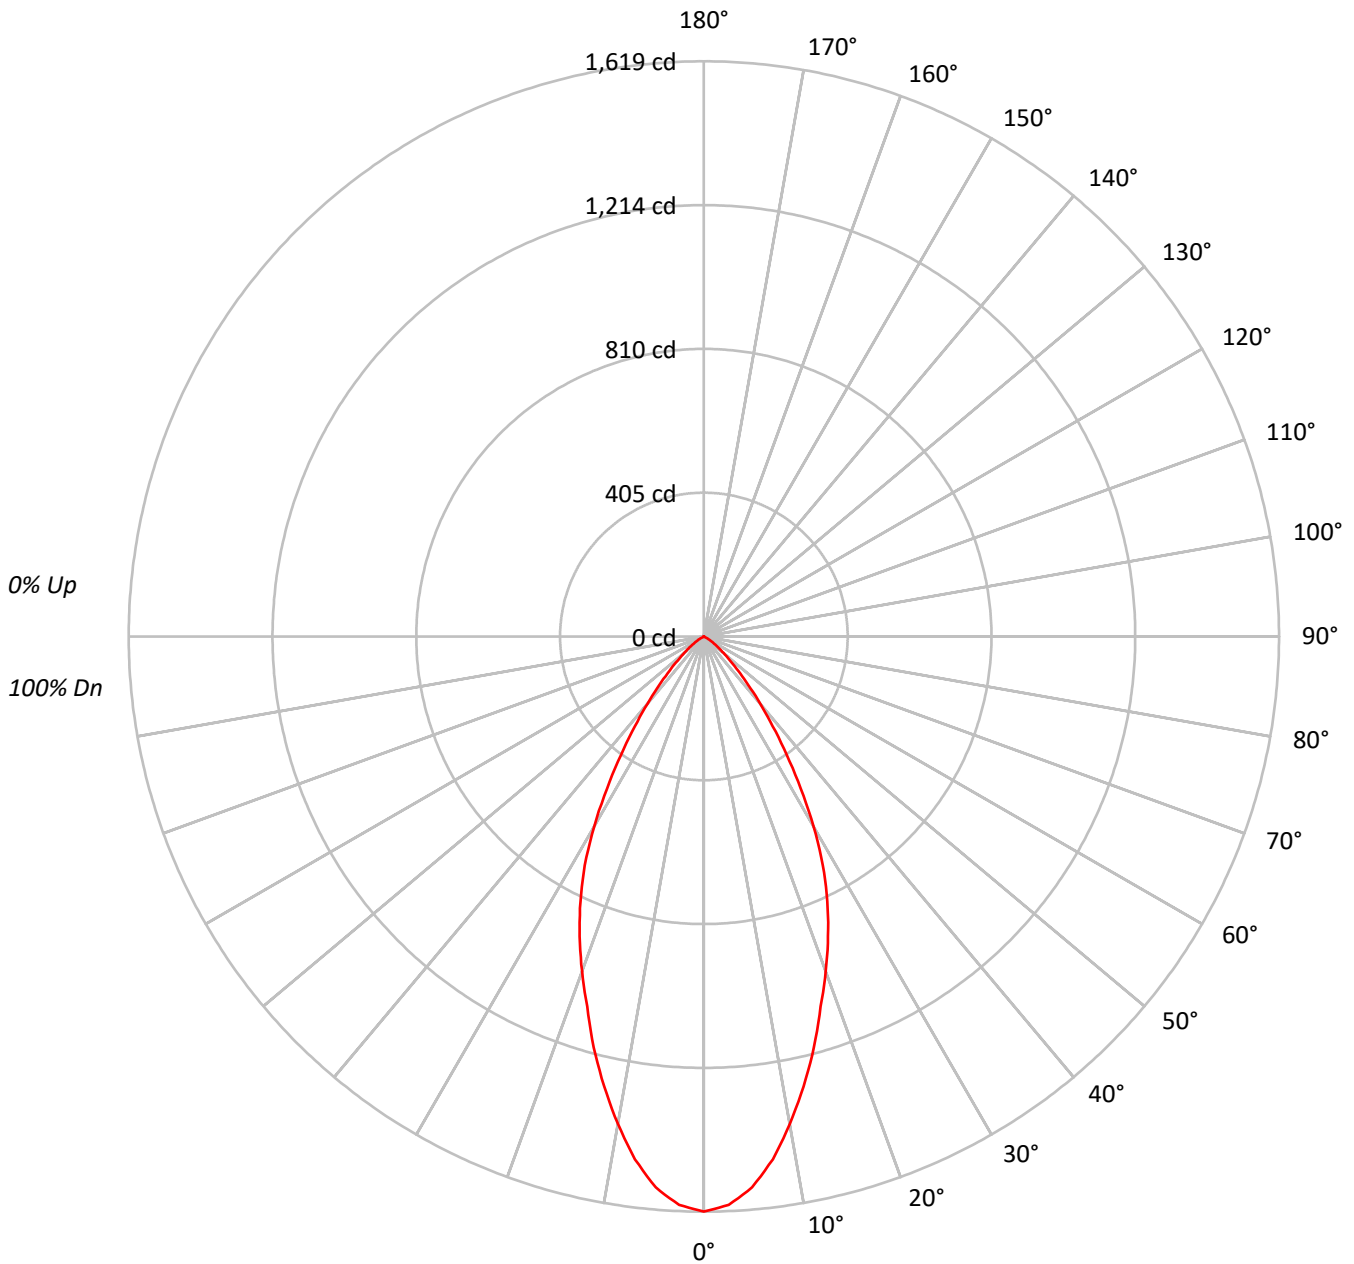



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559024D010 2LBD\*WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																											
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87																											
3	102	96	90	86	100	94	90	86	92	88	84	89	86	83	87	84	82	80																											
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74																											
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69																											
6	87	78	72	68	86	77	71	67	76	71	67	74	70	66	73	69	66	64																											
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60																											
8	79	69	63	59	77	68	63	59	67	62	58	66	61	58	65	61	58	56																											
9	75	65	59	55	74	64	59	55	64	58	55	63	58	54	62	57	54	53																											
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	626997
5°	605285
10°	548015
15°	480089
20°	413359
25°	351399
30°	276188
35°	191982
40°	124388
45°	74445
50°	43508
55°	24379
60°	9296
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559024D010 2LBD\*WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	143.3	11.4
10°-20°	333.3	26.6
20°-30°	373.4	29.8
30°-40°	256.6	20.5
40°-50°	110.3	8.8
50°-60°	33.6	2.7
60°-70°	1.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	850.1	67.9
0°-40°	1106.7	88.4
0°-60°	1250.6	99.9
0°-90°	1252.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1252.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1619	
5°	1557	143
15°	1197	333
25°	822	373
35°	406	257
45°	136	110
55°	36	34
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559024D010 2LBD\*WH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1618.7
2.5°	1601.5
5°	1556.7
7.5°	1484.5
10°	1393.3
12.5°	1297.0
15°	1197.2
17.5°	1092.3
20°	1002.8
22.5°	913.4
25°	822.2
27.5°	725.9
30°	617.5
32.5°	507.4
35°	406.0
37.5°	318.2
40°	246.0
42.5°	184.1
45°	135.9
47.5°	99.8
50°	72.2
52.5°	49.9
55°	36.1
57.5°	24.1
60°	12.0
62.5°	1.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)