

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2B20WFL559024D010 2LBDL*WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14804)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2B20WFL559024D010 2LBDL*WH
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH WHEAT HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1155.6 lumens
Efficiency: N/A
Efficacy: 55.3 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.81
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LSR2B20WFL559024D010 2LBDL*WH

Luminous Intensity Polar Plot

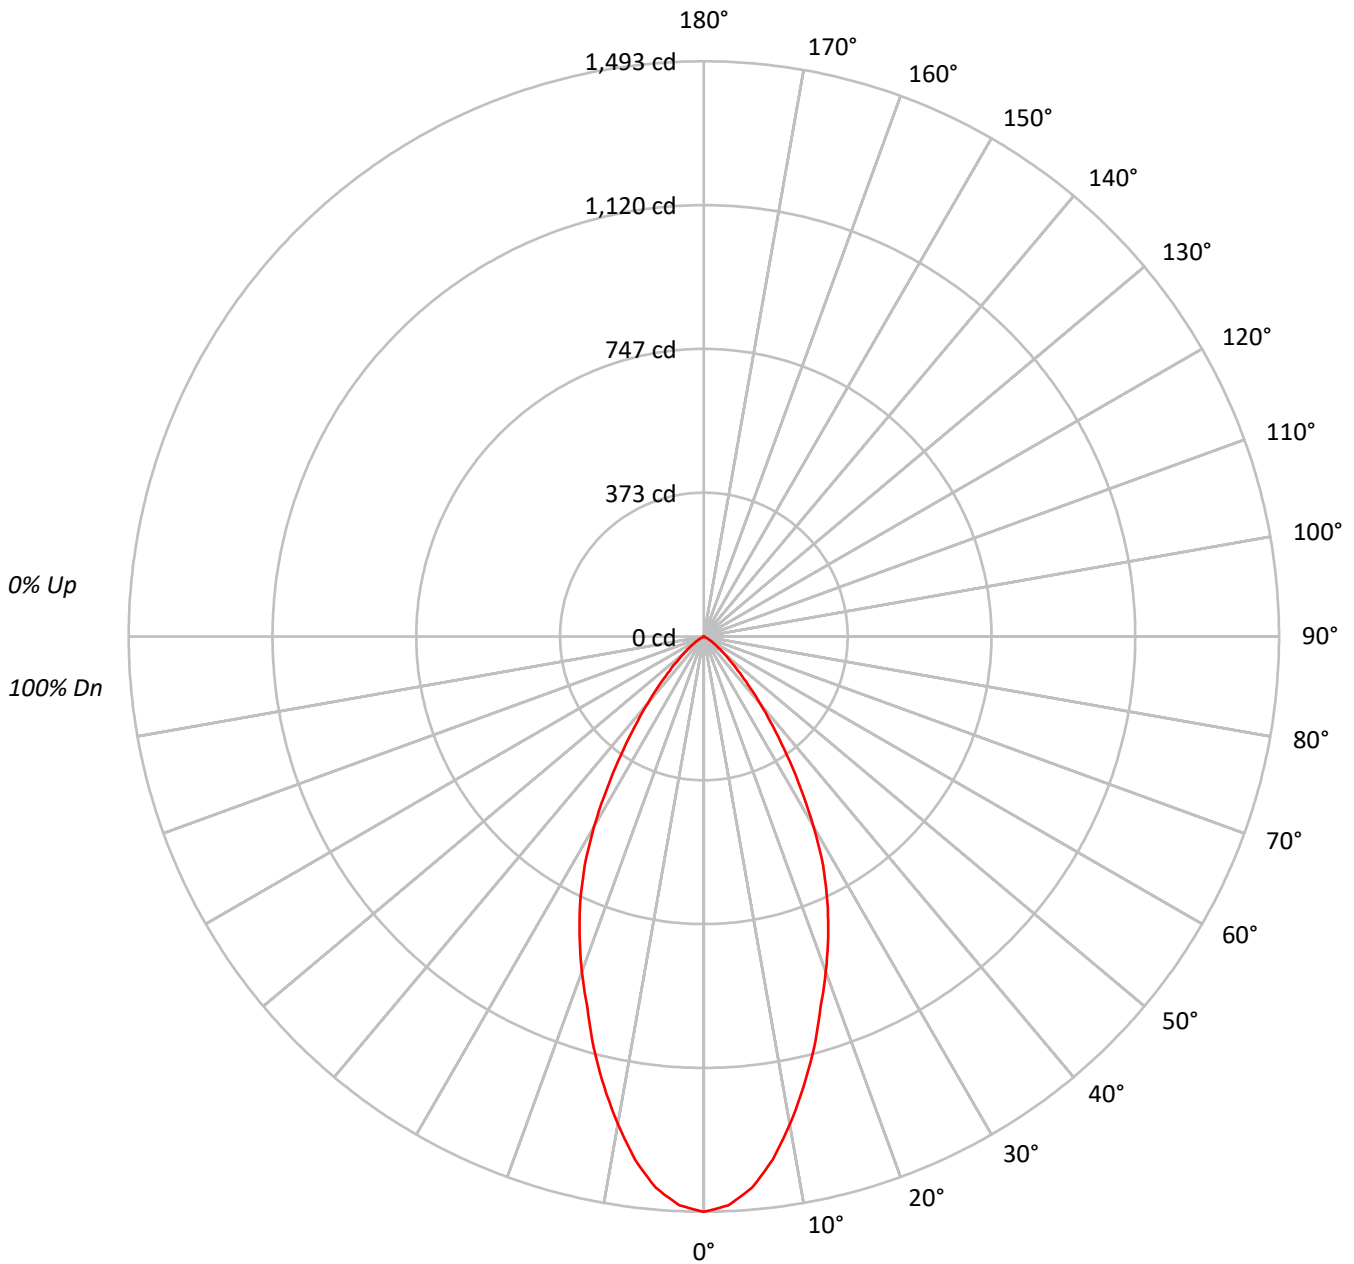



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559024D010 2LBDL*WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	90	86	100	94	90	86	92	88	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69
6	87	78	72	68	86	77	71	67	76	71	67	74	70	66	73	69	66	64
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	79	69	63	59	77	68	63	59	67	62	58	66	61	58	65	61	58	56
9	75	65	59	55	74	64	59	55	64	58	55	63	58	54	62	57	54	53
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	578462
5°	558470
10°	505615
15°	442956
20°	381413
25°	324217
30°	254854
35°	177087
40°	114781
45°	68693
50°	40194
55°	22488
60°	8599
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559024D010 2LBDL*WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.2	11.4
10°-20°	307.5	26.6
20°-30°	344.5	29.8
30°-40°	236.8	20.5
40°-50°	101.7	8.8
50°-60°	31.0	2.7
60°-70°	1.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	784.3	67.9
0°-40°	1021.1	88.4
0°-60°	1153.9	99.9
0°-90°	1155.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1155.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1493	
5°	1436	132
15°	1105	308
25°	759	345
35°	374	237
45°	125	102
55°	33	31
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2B20WFL559024D010 2LBDL*WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1493.4
2.5°	1477.6
5°	1436.3
7.5°	1369.6
10°	1285.5
12.5°	1196.6
15°	1104.6
17.5°	1007.8
20°	925.3
22.5°	842.7
25°	758.6
27.5°	669.7
30°	569.8
32.5°	468.2
35°	374.5
37.5°	293.6
40°	227.0
42.5°	169.8
45°	125.4
47.5°	92.0
50°	66.7
52.5°	46.0
55°	33.3
57.5°	22.2
60°	11.1
62.5°	1.6
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)