

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224926

Luminaire Tested: **LSR2WM2B20FL409024D010 2LBD\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P224926  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (156)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR2WM2B20FL409024D010 2LBD\*H  
Description: 2000 Lumen, 2inch Portfolio LED Cylinder  
FLOOD OPTIC  
SPUN ROUND TRIM WITH HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1330.0 lumens  
Efficiency: N/A  
Efficacy: 63.6 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.59  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P224926

CATALOG NUMBER: LSR2WM2B20FL409024D010 2LBD\*H

### Luminous Intensity Polar Plot

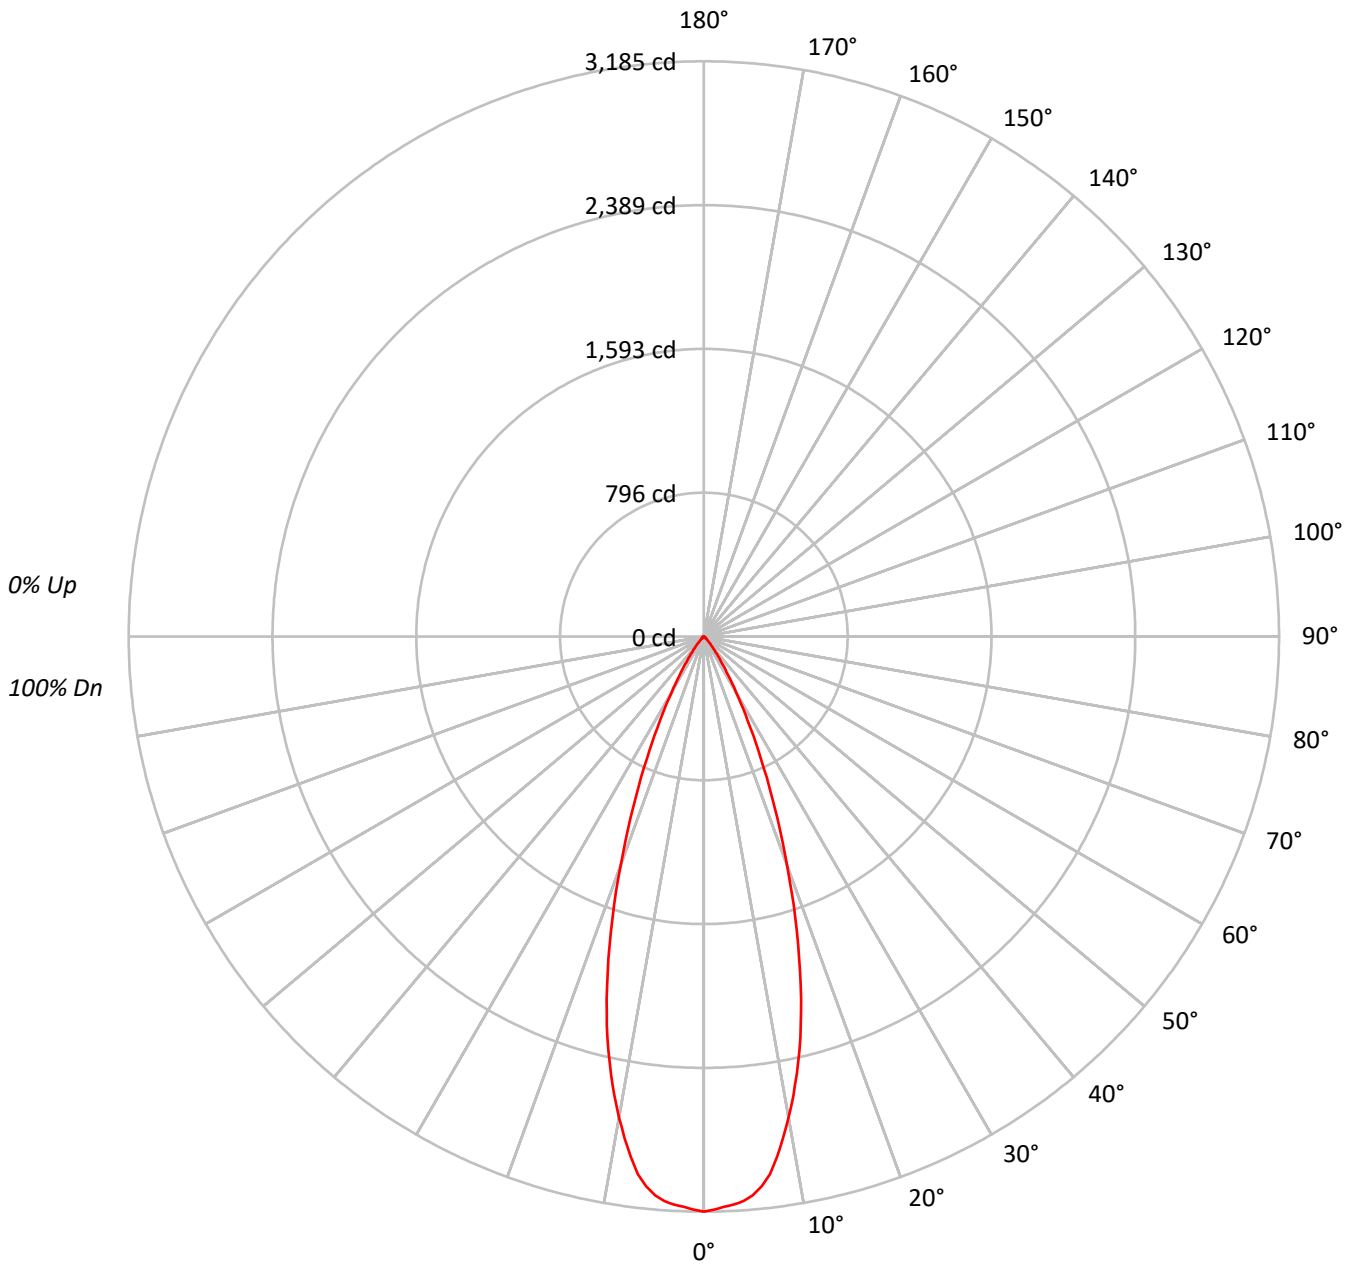



TEST NUMBER: P224926

CATALOG NUMBER: LSR2WM2B20FL409024D010 2LBD\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	103	100	108	104	101	99	101	99	97	98	96	94	96	94	93	91	91	91	91
3	106	100	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87	87	87	87
4	102	96	91	88	100	94	90	87	92	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	86	83	96	90	86	82	89	85	82	87	84	81	86	83	80	79	79	79	79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76	76	76	76
7	91	83	78	75	90	83	78	75	82	77	74	80	77	74	79	76	74	73	73	73	73
8	88	80	75	72	87	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
9	85	77	72	69	84	76	72	69	75	71	68	75	71	68	74	70	68	67	67	67	67
10	82	74	69	66	81	73	69	66	73	69	66	72	68	66	71	68	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1233620
5°	1207809
10°	1063738
15°	834542
20°	554210
25°	318148
30°	159541
35°	73672
40°	29934
45°	13421
50°	6990
55°	4322
60°	2014
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224926

CATALOG NUMBER: LSR2WM2B20FL409024D010 2LBD\*H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	283.7	21.3
10°-20°	563.3	42.4
20°-30°	350.0	26.3
30°-40°	105.6	7.9
40°-50°	21.6	1.6
50°-60°	5.6	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1197.0	90.0
0°-40°	1302.6	97.9
0°-60°	1329.7	100.0
0°-90°	1330.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1330.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3185	
5°	3106	284
15°	2081	563
25°	744	350
35°	156	106
45°	24	22
55°	6	6
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224926

CATALOG NUMBER: LSR2WM2B20FL409024D010 2LBD\*H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3184.8
1°	3174.5
2°	3160.4
3°	3150.0
4°	3134.6
5°	3106.3
6°	3061.2
7°	2999.4
8°	2910.5
9°	2810.1
10°	2704.5
11°	2592.4
12°	2475.2
13°	2352.9
14°	2218.9
15°	2081.1
17.5°	1711.5
20°	1344.5
22.5°	1020.0
25°	744.4
27.5°	525.4
30°	356.7
32.5°	234.4
35°	155.8
37.5°	96.6
40°	59.2
42.5°	38.6
45°	24.5
47.5°	15.5
50°	11.6
52.5°	7.7
55°	6.4
57.5°	3.9
60°	2.6
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224926

CATALOG NUMBER: LSR2WM2B20FL409024D010 2LBD\*H

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)