

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P222973

Luminaire Tested: **LSR2WM2B20NFL259024D010 2LBDLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P222973
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2WM2B20NFL259024D010 2LBDLC*MW
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
NARROW FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1245.2 lumens
Efficiency: N/A
Efficacy: 59.6 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P222973

CATALOG NUMBER: LSR2WM2B20NFL259024D010 2LBDLC**MW*

Luminous Intensity Polar Plot

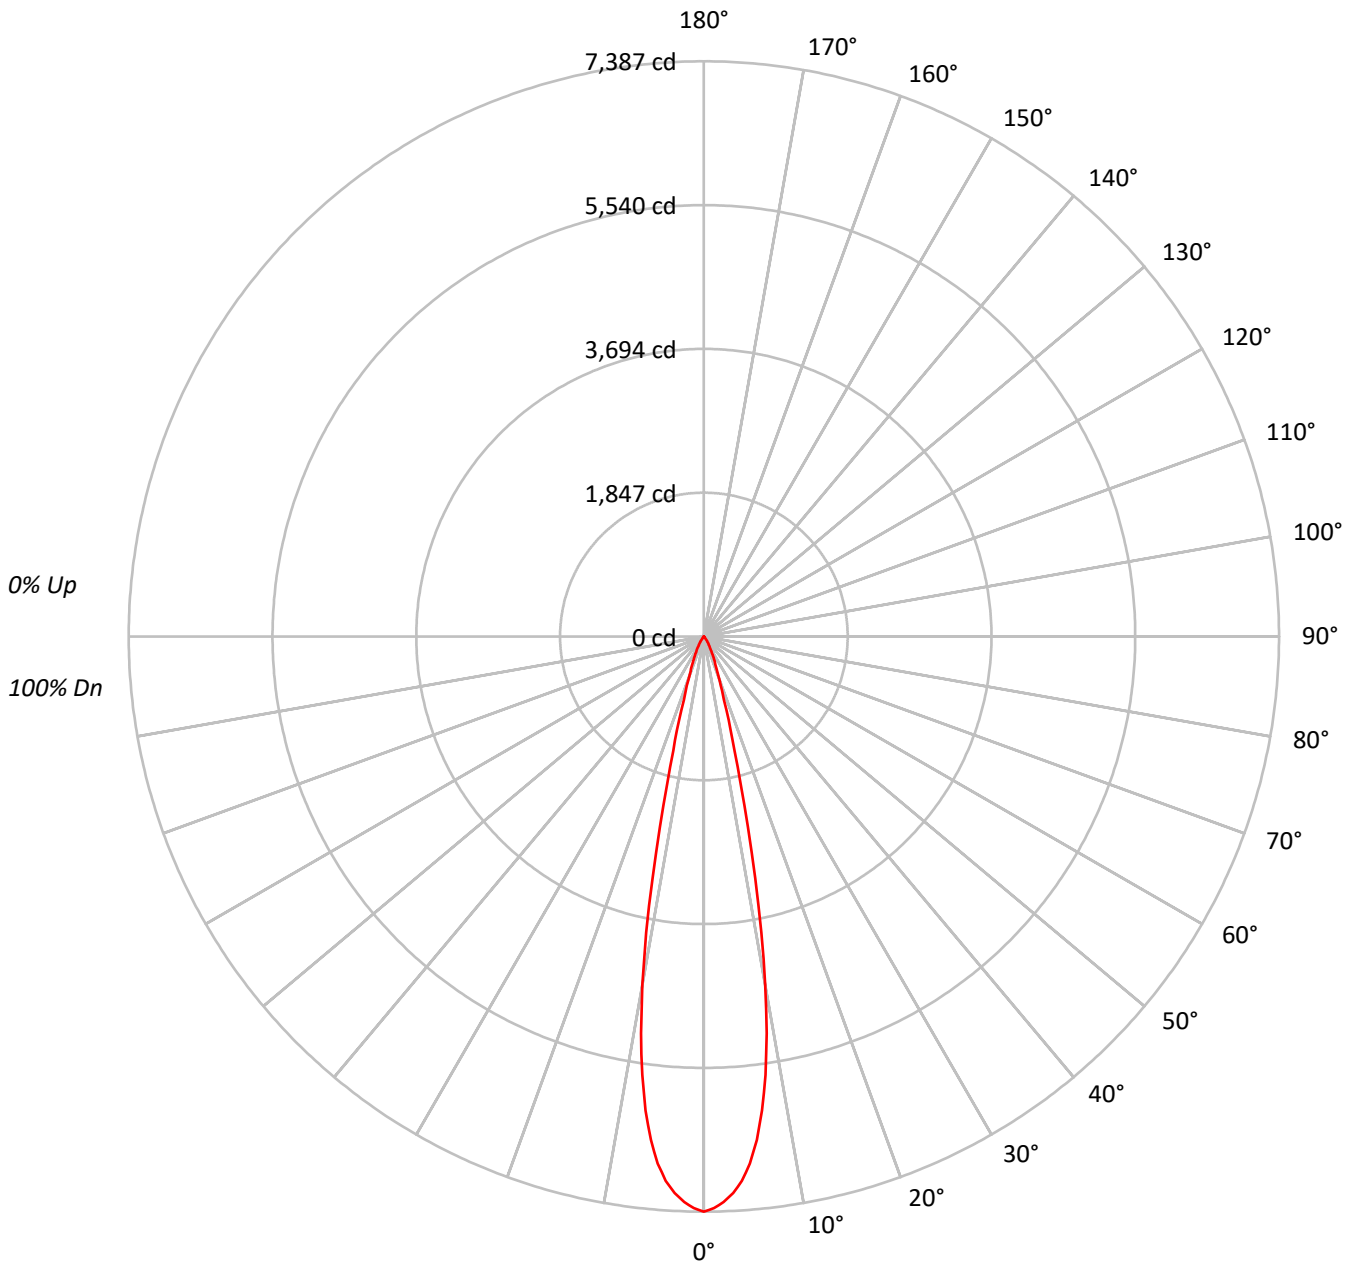



TEST NUMBER: P222973

CATALOG NUMBER: LSR2WM2B20NFL259024D010 2LBDLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	96	95
2	112	109	106	104	110	107	104	102	104	102	100	101	99	98	98	97	96	95	95	93	92
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	96	95	93	92	92	91	90
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90	89	88	86
5	103	98	94	91	102	97	94	91	95	92	90	94	91	89	93	90	89	88	87	86	84
6	101	95	91	89	99	94	91	88	93	90	88	92	89	87	91	88	87	86	85	84	82
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	85	84	83	82	80
8	96	90	86	84	95	90	86	84	89	86	83	88	85	83	87	85	83	82	81	80	79
9	94	88	84	82	93	88	84	82	87	84	82	86	83	81	85	83	81	80	79	79	79
10	92	86	82	80	91	86	82	80	85	82	80	84	82	80	84	81	79	79	79	79	79

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2861441
5°	2642031
10°	1788315
15°	608412
20°	223456
25°	118472
30°	60873
35°	28419
40°	9304
45°	4711
50°	2230
55°	810
60°	930
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P222973

CATALOG NUMBER: LSR2WM2B20NFL259024D010 2LBDLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	578.0	46.4
10°-20°	486.0	39.0
20°-30°	133.4	10.7
30°-40°	38.9	3.1
40°-50°	7.2	0.6
50°-60°	1.6	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1197.3	96.2
0°-40°	1236.2	99.3
0°-60°	1245.0	100.0
0°-90°	1245.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1245.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7387	
5°	6795	578
15°	1517	486
25°	277	133
35°	60	39
45°	9	7
55°	1	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P222973

CATALOG NUMBER: LSR2WM2B20NFL259024D010 2LBDLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7387.3
1°	7344.4
2°	7268.3
3°	7159.2
4°	7009.5
5°	6794.9
6°	6501.8
7°	6135.0
8°	5687.4
9°	5158.7
10°	4546.7
11°	3875.8
12°	3177.9
13°	2511.9
14°	1944.0
15°	1517.2
17.5°	856.1
20°	542.1
22.5°	386.4
25°	277.2
27.5°	196.2
30°	136.1
32.5°	95.7
35°	60.1
37.5°	24.5
40°	18.4
42.5°	13.5
45°	8.6
47.5°	4.9
50°	3.7
52.5°	2.5
55°	1.2
57.5°	1.2
60°	1.2
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P222973

CATALOG NUMBER: LSR2WM2B20NFL259024D010 2LBDLC*MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)