

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B20FL408027D010 2LBD*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B20FL408027D010 2LBD*LI
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1833.9 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20FL408027D010 2LBD*LI

Luminous Intensity Polar Plot

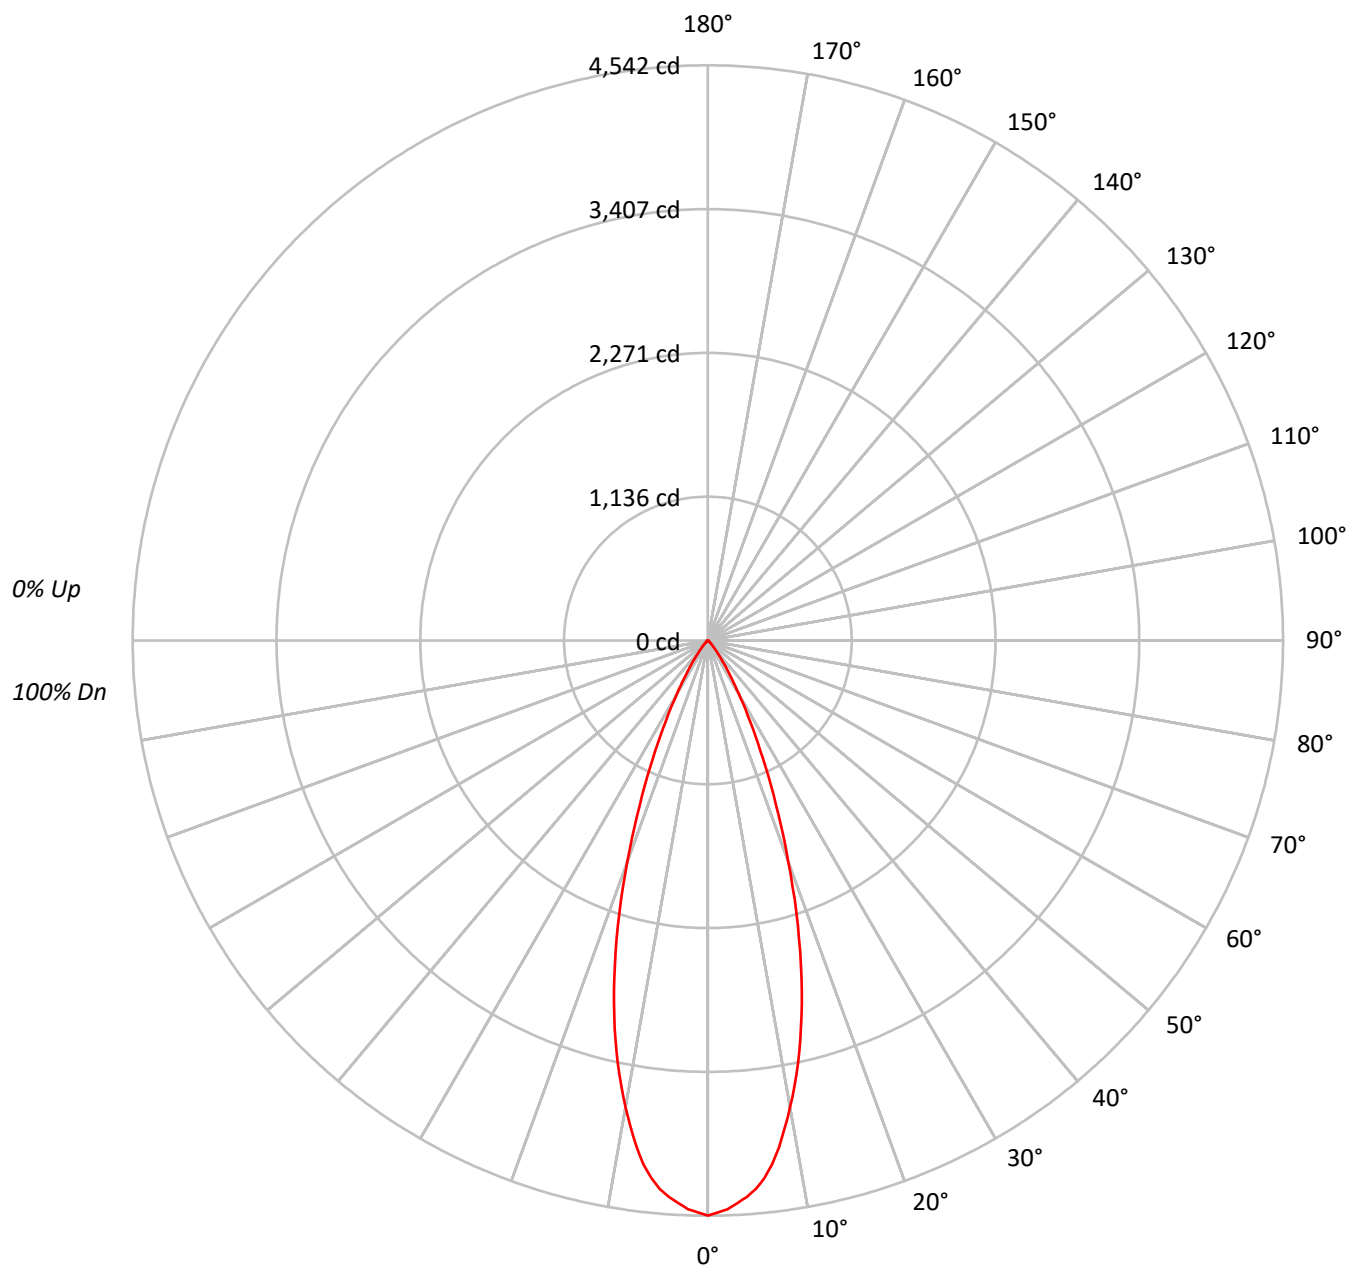



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20FL408027D010 2LBD*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	105	103		102	101	100		99
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96
3	106	101	96	93	104	99	95	92	97	94	91		94	92	90		92
4	102	96	91	88	100	95	90	87	93	89	86		91	88	85		89
5	98	91	86	83	97	90	86	83	89	85	82		87	84	81		86
6	94	87	82	79	93	86	82	79	85	81	78		84	80	78		83
7	91	83	79	75	90	83	78	75	82	78	75		81	77	74		80
8	88	80	75	72	87	80	75	72	79	74	71		78	74	71		77
9	85	77	72	69	84	76	72	69	76	71	69		75	71	68		74
10	82	74	69	66	81	74	69	66	73	69	66		72	68	66		72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1759171
5°	1690536
10°	1471612
15°	1149134
20°	764228
25°	437604
30°	217551
35°	100010
40°	40098
45°	18351
50°	8497
55°	4727
60°	2711
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20FL408027D010 2LBD*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	395.7	21.6
10°-20°	777.1	42.4
20°-30°	480.9	26.2
30°-40°	143.9	7.8
40°-50°	28.8	1.6
50°-60°	7.0	0.4
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1653.7	90.2
0°-40°	1797.6	98.0
0°-60°	1833.5	100.0
0°-90°	1833.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1833.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4542	
5°	4348	396
15°	2866	777
25°	1024	481
35°	212	144
45°	34	29
55°	7	7
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20FL408027D010 2LBD*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4541.6
1°	4517.0
2°	4494.1
3°	4448.2
4°	4405.9
5°	4347.8
6°	4268.5
7°	4168.0
8°	4039.4
9°	3893.1
10°	3741.5
11°	3584.7
12°	3417.2
13°	3242.8
14°	3056.0
15°	2865.6
17.5°	2363.3
20°	1854.0
22.5°	1402.8
25°	1023.9
27.5°	719.0
30°	486.4
32.5°	320.8
35°	211.5
37.5°	132.2
40°	79.3
42.5°	51.1
45°	33.5
47.5°	21.1
50°	14.1
52.5°	10.6
55°	7.0
57.5°	5.3
60°	3.5
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20FL408027D010 2LBD*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)