

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2WM2B20WFL559027D010 2LBDC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14811)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2WM2B20WFL559027D010 2LBDC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1349.4 lumens
Efficiency: N/A
Efficacy: 64.6 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSR2WM2B20WFL559027D010 2LBDC*MMS

Luminous Intensity Polar Plot

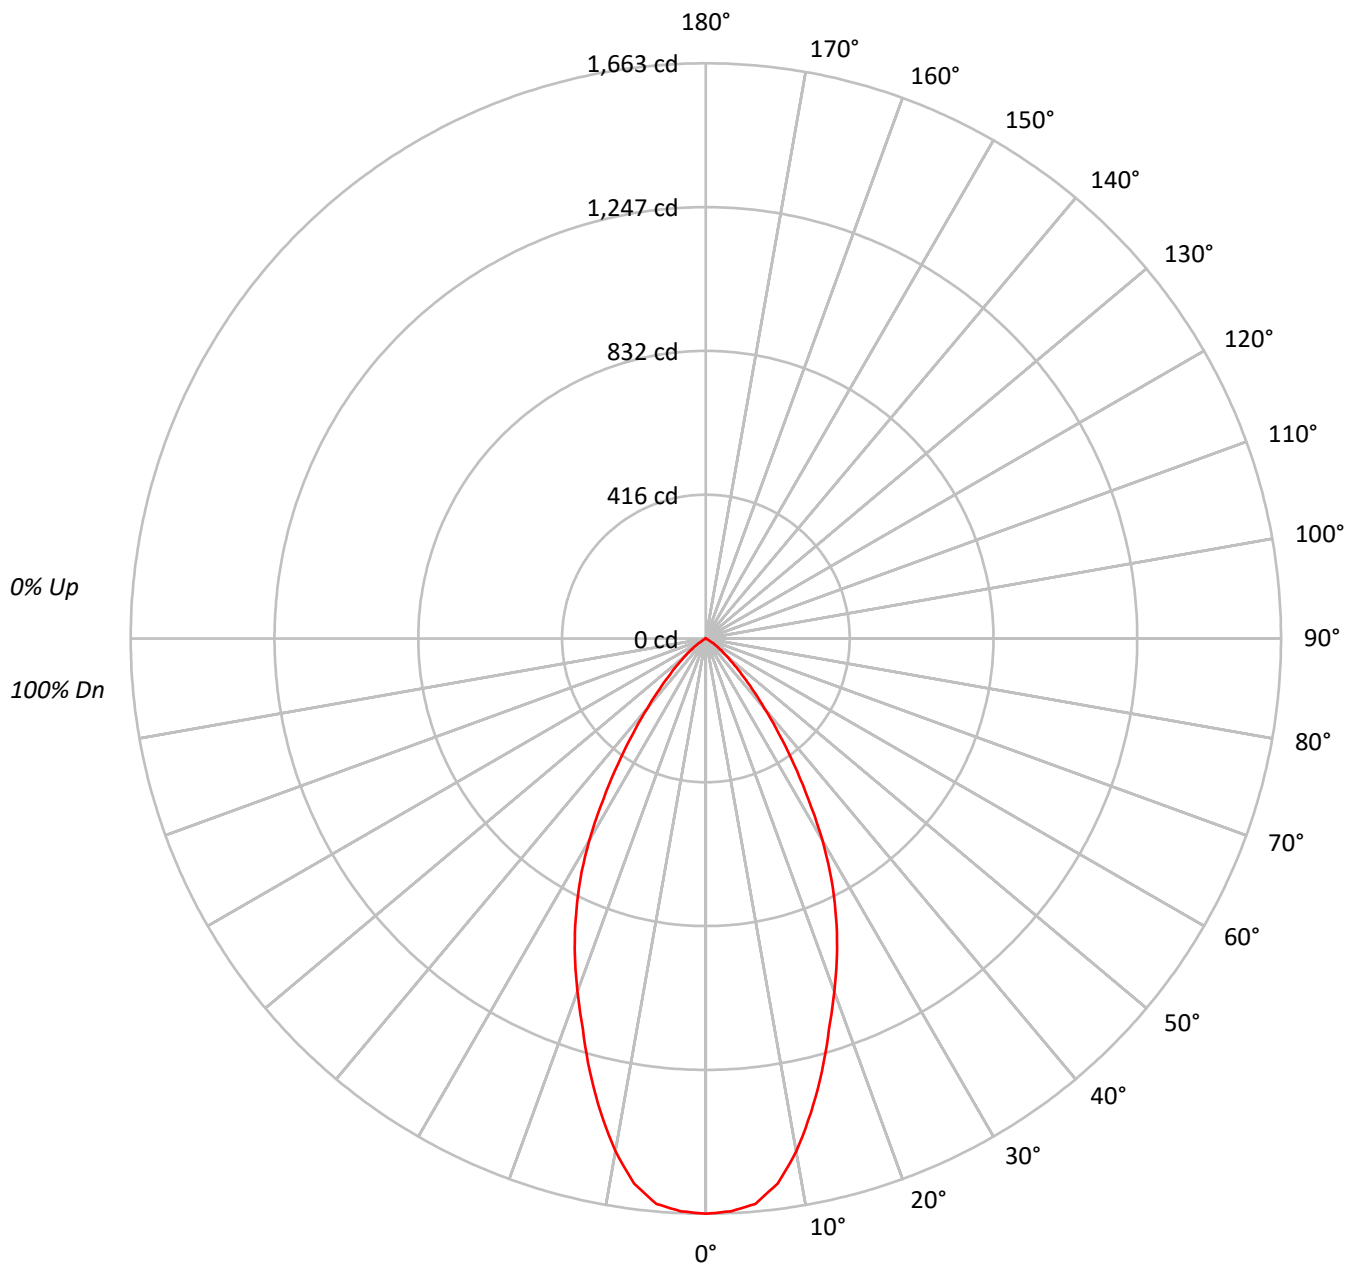



TEST NUMBER: P#

CATALOG NUMBER: LSR2WM2B20WFL559027D010 2LBDC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	108	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	84		89	86	83		87	84	82
4	97	89	84	79		95	88	83	79		86	81	78		84	80	77		82	79	76
5	92	83	77	73		90	82	77	73		81	76	72		79	75	71		77	74	71
6	87	78	72	68		86	77	72	67		76	71	67		74	70	66		73	69	66
7	83	73	67	63		81	73	67	63		71	66	62		70	65	62		69	65	62
8	79	69	63	59		77	68	63	59		67	62	58		66	62	58		65	61	58
9	75	65	59	55		74	65	59	55		64	58	55		63	58	55		62	58	54
10	71	62	56	52		70	61	55	52		60	55	51		59	55	51		59	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	644234
5°	638024
10°	592224
15°	519869
20°	447366
25°	380718
30°	301549
35°	209289
40°	132984
45°	80142
50°	45738
55°	24987
60°	2866
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2WM2B20WFL559027D010 2LBDC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.2	11.3
10°-20°	360.9	26.7
20°-30°	405.1	30.0
30°-40°	279.1	20.7
40°-50°	118.0	8.7
50°-60°	33.2	2.5
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	918.2	68.0
0°-40°	1197.3	88.7
0°-60°	1348.5	99.9
0°-90°	1349.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1349.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1663	
5°	1641	152
15°	1296	361
25°	891	405
35°	443	279
45°	146	118
55°	37	33
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2WM2B20WFL559027D010 2LBDC*MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1663.2
2.5°	1657.6
5°	1640.9
7.5°	1589.1
10°	1505.7
12.5°	1403.9
15°	1296.4
17.5°	1183.5
20°	1085.3
22.5°	990.9
25°	890.8
27.5°	787.1
30°	674.2
32.5°	551.9
35°	442.6
37.5°	346.3
40°	263.0
42.5°	198.2
45°	146.3
47.5°	105.6
50°	75.9
52.5°	55.6
55°	37.0
57.5°	18.5
60°	3.7
62.5°	1.9
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)