

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224932

Luminaire Tested: **LSR2WM2B20FL409727D010 2LBD*H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224932
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (156)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2WM2B20FL409727D010 2LBD*H
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
SPUN ROUND TRIM WITH HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1291.3 lumens
Efficiency: N/A
Efficacy: 61.8 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224932

CATALOG NUMBER: LSR2WM2B20FL409727D010 2LBD*H

Luminous Intensity Polar Plot

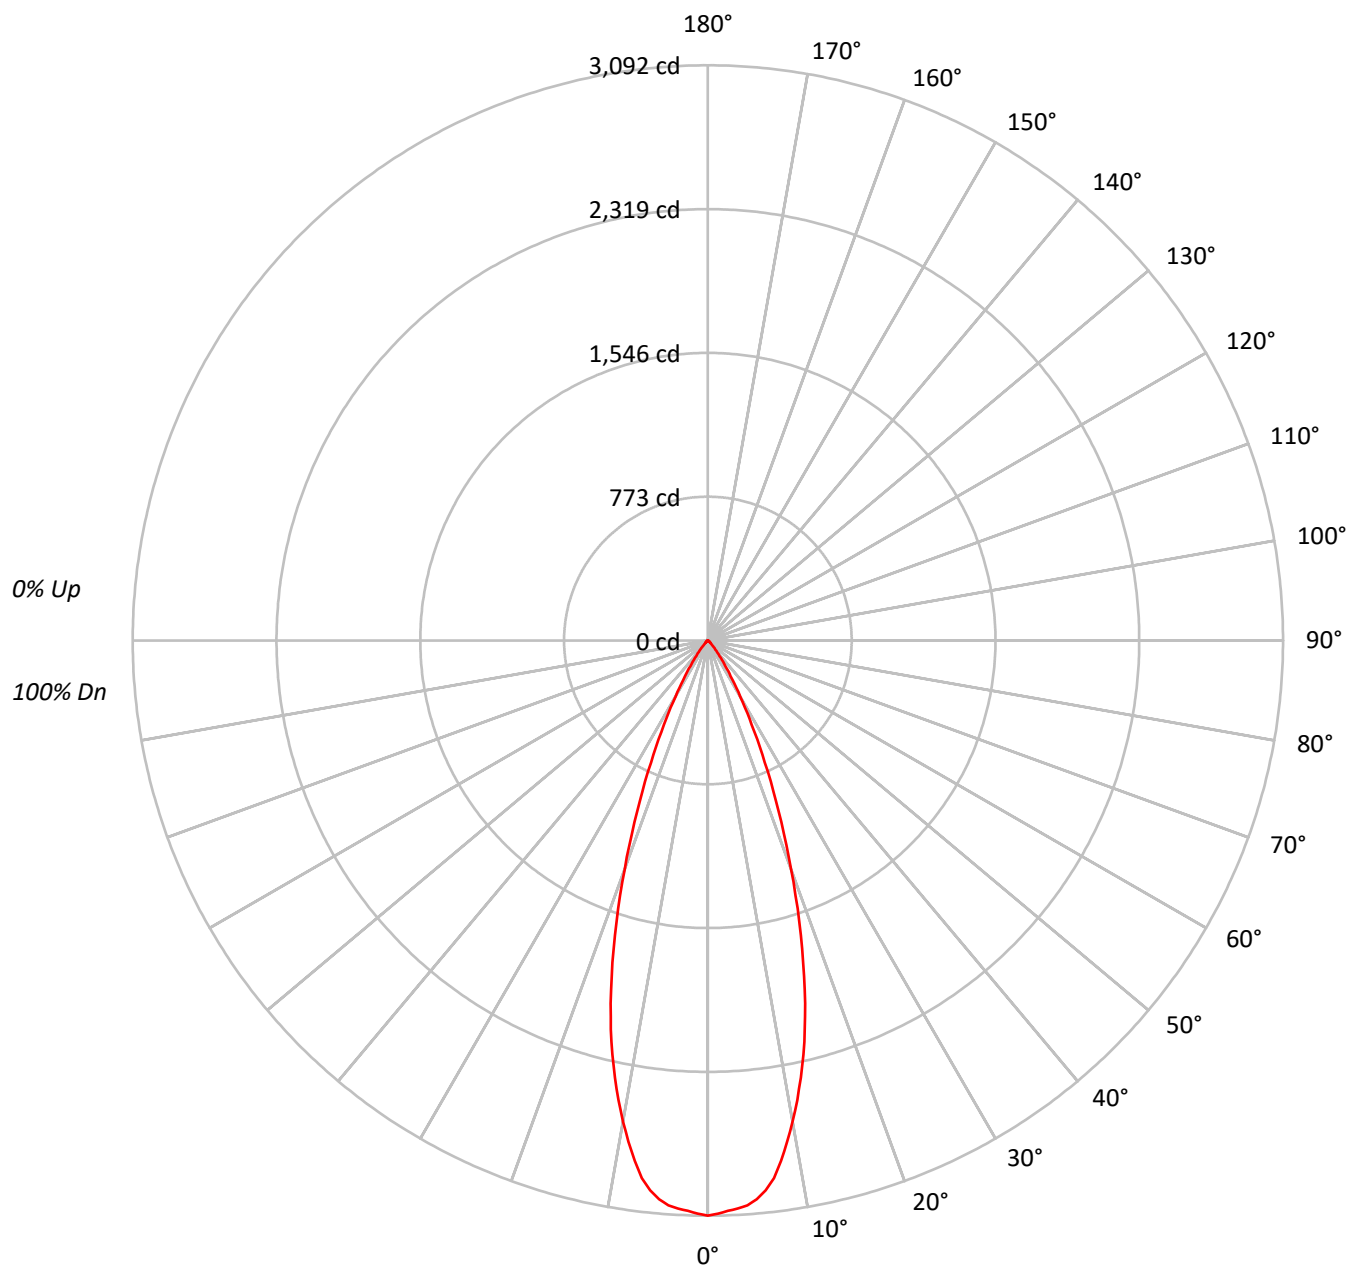



TEST NUMBER: P224932

CATALOG NUMBER: LSR2WM2B20FL409727D010 2LBD*H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	114	112	110	108	112	110	108	106		106	104	103			102	101	100			99
2	110	106	103	100	108	104	101	99		101	99	97			98	96	94			96
3	106	100	96	93	104	99	95	92		97	94	91			94	92	90			92
4	102	96	91	88	100	94	90	87		92	89	86			91	88	85			89
5	98	91	86	83	96	90	86	82		89	85	82			87	84	81			86
6	94	87	82	79	93	86	82	78		85	81	78			84	80	77			82
7	91	83	78	75	90	83	78	75		82	77	74			80	77	74			79
8	88	80	75	72	87	79	75	72		78	74	71			77	74	71			77
9	85	77	72	69	84	76	72	69		75	71	68			75	71	68			74
10	82	74	69	66	81	73	69	66		73	69	66			72	68	66			71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1197713
5°	1172659
10°	1032783
15°	810281
20°	538092
25°	308874
30°	154934
35°	71544
40°	29075
45°	13037
50°	6809
55°	4254
60°	1937
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224932

CATALOG NUMBER: LSR2WM2B20FL409727D010 2LBD*H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	275.4	21.3
10°-20°	546.9	42.4
20°-30°	339.8	26.3
30°-40°	102.5	7.9
40°-50°	20.9	1.6
50°-60°	5.4	0.4
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1162.2	90.0
0°-40°	1264.7	97.9
0°-60°	1291.0	100.0
0°-90°	1291.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1291.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3092	
5°	3016	275
15°	2021	547
25°	723	340
35°	151	103
45°	24	21
55°	6	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224932

CATALOG NUMBER: LSR2WM2B20FL409727D010 2LBD*H

CANDELA DISTRIBUTION (FULL):

	0°
0°	3092.1
1°	3082.1
2°	3068.4
3°	3058.4
4°	3043.4
5°	3015.9
6°	2972.1
7°	2912.1
8°	2825.8
9°	2728.3
10°	2625.8
11°	2517.0
12°	2403.2
13°	2284.4
14°	2154.4
15°	2020.6
17.5°	1661.7
20°	1305.4
22.5°	990.3
25°	722.7
27.5°	510.1
30°	346.4
32.5°	227.6
35°	151.3
37.5°	93.8
40°	57.5
42.5°	37.5
45°	23.8
47.5°	15.0
50°	11.3
52.5°	7.5
55°	6.3
57.5°	3.8
60°	2.5
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224932

CATALOG NUMBER: LSR2WM2B20FL409727D010 2LBD*H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)