

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225085

Luminaire Tested: **LSSQ2B20FL409727D010 2LBD*WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225085
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14829)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQ2B20FL409727D010 2LBD*WH
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
SPUN ROUND TRIM WITH WHEAT HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1315.5 lumens
Efficiency: N/A
Efficacy: 62.9 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225085

CATALOG NUMBER: LSSQ2B20FL409727D010 2LBD*WH

Luminous Intensity Polar Plot

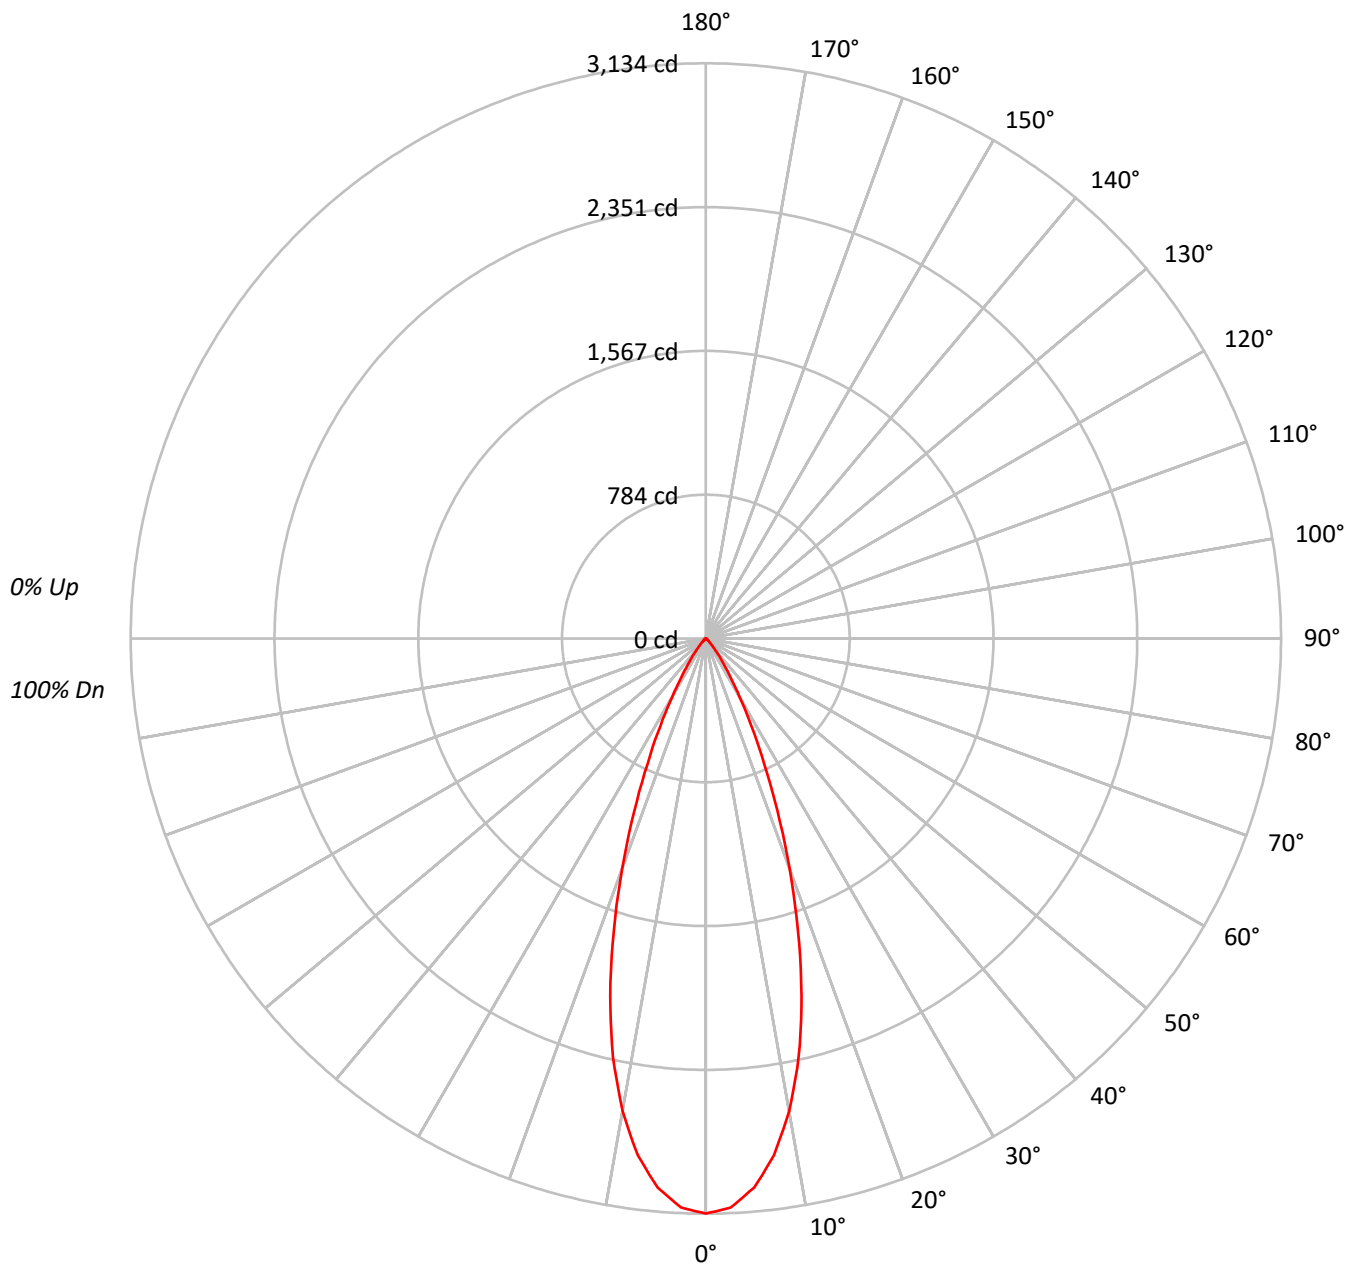



TEST NUMBER: P225085

CATALOG NUMBER: LSSQ2B20FL409727D010 2LBD*WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	106	102	100		108	104	101	98		101	98	96		98	96	94		95	94	92
3	106	100	96	93		104	99	95	92		96	93	91		94	91	89		92	90	88
4	102	95	91	87		100	94	90	87		92	89	86		90	87	85		88	86	84
5	98	91	86	82		96	90	85	82		88	84	81		87	83	81		85	82	80
6	94	87	82	78		93	86	81	78		85	80	77		83	80	77		82	79	76
7	91	83	78	75		89	82	78	74		81	77	74		80	76	74		79	76	73
8	87	79	75	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		71	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1213749
5°	1167838
10°	1027946
15°	807434
20°	548975
25°	320542
30°	163253
35°	77218
40°	33726
45°	14626
50°	7050
55°	4525
60°	2556
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225085

CATALOG NUMBER: LSSQ2B20FL409727D010 2LBD*WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	274.3	20.9
10°-20°	547.5	41.6
20°-30°	351.4	26.7
30°-40°	111.5	8.5
40°-50°	23.8	1.8
50°-60°	6.1	0.5
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1173.3	89.2
0°-40°	1284.7	97.7
0°-60°	1314.7	99.9
0°-90°	1315.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1315.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3134	
5°	3004	274
15°	2014	548
25°	750	351
35°	163	111
45°	27	24
55°	7	6
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225085

CATALOG NUMBER: LSSQ2B20FL409727D010 2LBD*WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3133.5
2.5°	3103.5
5°	3003.5
7.5°	2840.2
10°	2613.5
12.5°	2336.8
15°	2013.5
17.5°	1668.4
20°	1331.8
22.5°	1016.7
25°	750.0
27.5°	535.0
30°	365.0
32.5°	245.0
35°	163.3
37.5°	108.3
40°	66.7
42.5°	41.7
45°	26.7
47.5°	18.3
50°	11.7
52.5°	8.3
55°	6.7
57.5°	5.0
60°	3.3
62.5°	1.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)