

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225313

Luminaire Tested: **LSSQWM2B20FL408035D010 2LBDC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225313
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B20FL408035D010 2LBDC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1887.1 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225313

CATALOG NUMBER: LSSQWM2B20FL408035D010 2LBDC*MMS

Luminous Intensity Polar Plot

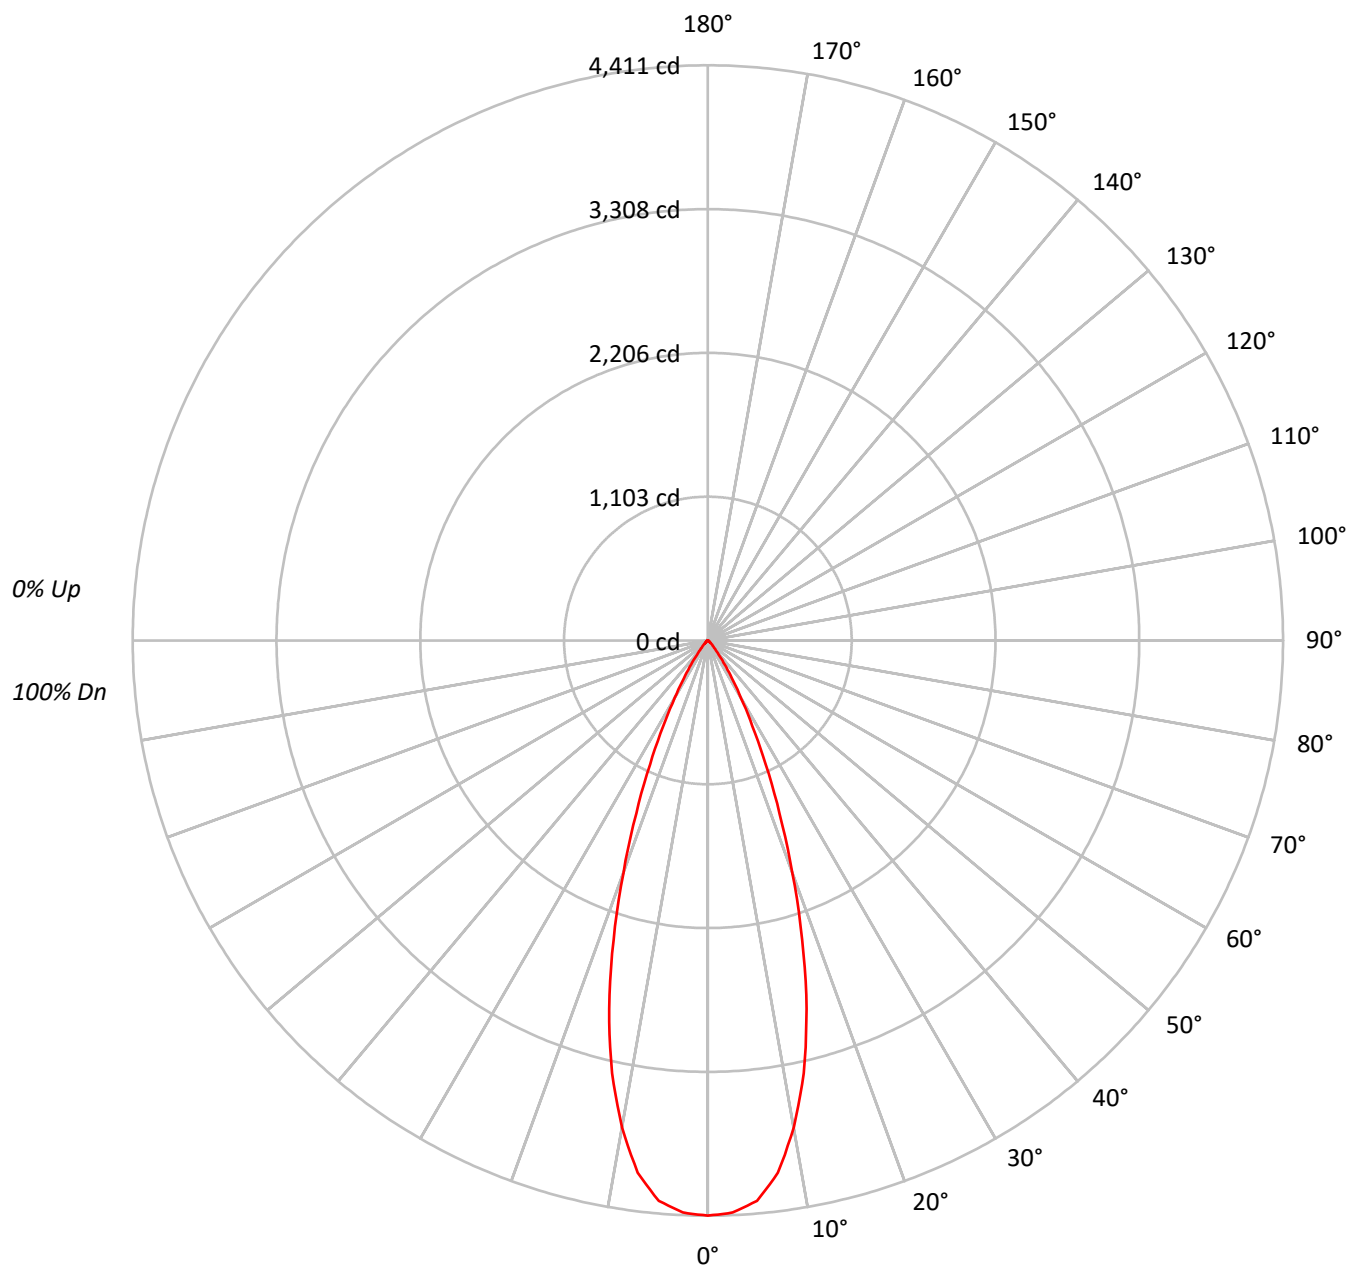



TEST NUMBER: P225313

CATALOG NUMBER: LSSQWM2B20FL408035D010 2LBDC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			0
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			100
1	114	112	110	108		112	110	108	106		106	104	103			102	101	100			95
2	110	106	102	99		108	104	101	98		101	98	96			98	96	94			91
3	105	100	96	93		104	99	95	92		96	93	90			94	91	89			86
4	101	95	90	87		100	94	90	86		92	88	85			90	87	85			82
5	98	91	86	82		96	90	85	82		88	84	81			86	83	80			79
6	94	87	82	78		93	86	81	78		84	80	77			83	80	77			75
7	90	83	78	74		89	82	77	74		81	77	74			80	76	73			72
8	87	79	74	71		86	79	74	71		78	74	71			77	73	70			69
9	84	76	71	68		83	76	71	68		75	71	68			74	70	67			66
10	81	73	68	65		80	73	68	65		72	68	65			71	68	65			64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1708506
5°	1677394
10°	1491121
15°	1172714
20°	780345
25°	447989
30°	226318
35°	106441
40°	42828
45°	21199
50°	11691
55°	8171
60°	7515
65°	4399
70°	5436
75°	3592
80°	5354
85°	0



TEST NUMBER: P225313

CATALOG NUMBER: LSSQWM2B20FL408035D010 2LBDC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	395.1	20.9
10°-20°	792.2	42.0
20°-30°	492.8	26.1
30°-40°	151.5	8.0
40°-50°	33.3	1.8
50°-60°	11.8	0.6
60°-70°	6.0	0.3
70°-80°	3.5	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1680.1	89.0
0°-40°	1831.6	97.1
0°-60°	1876.7	99.4
0°-90°	1887.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1887.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4411	
5°	4314	395
15°	2924	792
25°	1048	493
35°	225	152
45°	39	33
55°	12	12
65°	5	6
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P225313

CATALOG NUMBER: LSSQWM2B20FL408035D010 2LBDC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	4410.8
2.5°	4391.4
5°	4314.0
7.5°	4117.9
10°	3791.1
12.5°	3398.9
15°	2924.4
17.5°	2406.3
20°	1893.1
22.5°	1435.6
25°	1048.2
27.5°	738.4
30°	506.0
32.5°	341.3
35°	225.1
37.5°	135.6
40°	84.7
42.5°	58.1
45°	38.7
47.5°	26.6
50°	19.4
52.5°	16.9
55°	12.1
57.5°	9.7
60°	9.7
62.5°	7.3
65°	4.8
67.5°	4.8
70°	4.8
72.5°	4.8
75°	2.4
77.5°	2.4
80°	2.4
82.5°	2.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)