

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B20WFL558040D010 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29153)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B20WFL558040D010 2LBDL*LI
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1720.1 lumens
Efficiency: N/A
Efficacy: 82.3 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.8
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20WFL558040D010 2LBDL*LI

Luminous Intensity Polar Plot

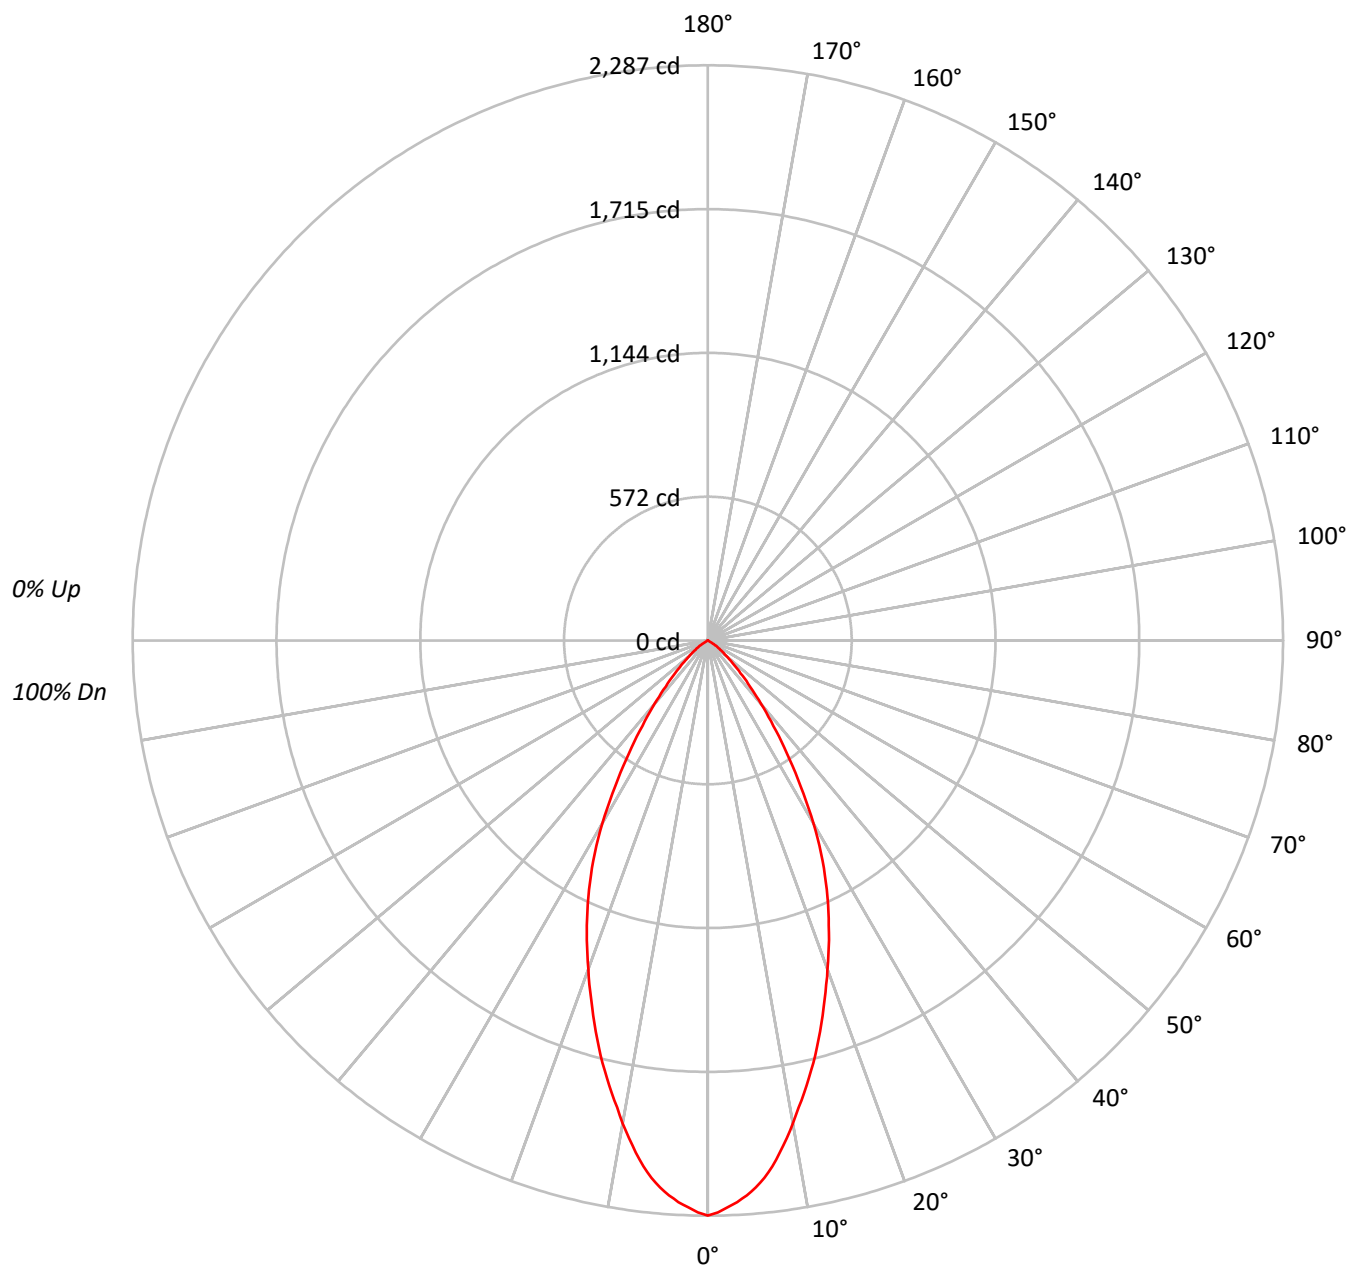



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20WFL558040D010 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	109	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		106	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	89	84	79		95	88	83	79		86	81	78		84	80	77		82	79	76
5	92	83	78	73		90	83	77	73		81	76	72		79	75	72		77	74	71
6	87	78	72	68		86	77	72	68		76	71	67		74	70	67		73	69	66
7	83	73	67	63		82	73	67	63		72	66	63		70	66	62		69	65	62
8	79	69	63	59		78	69	63	59		68	62	59		66	62	58		66	61	58
9	75	65	59	55		74	65	59	55		64	59	55		63	58	55		62	58	55
10	72	62	56	52		71	61	56	52		61	55	52		60	55	52		59	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	885744
5°	849040
10°	766819
15°	671812
20°	573171
25°	480813
30°	375035
35°	258561
40°	166054
45°	100465
50°	58935
55°	33023
60°	9451
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20WFL558040D010 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.9	11.7
10°-20°	465.6	27.1
20°-30°	511.7	29.7
30°-40°	346.3	20.1
40°-50°	148.4	8.6
50°-60°	45.3	2.6
60°-70°	1.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1178.2	68.5
0°-40°	1524.5	88.6
0°-60°	1718.2	99.9
0°-90°	1720.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1720.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2287	
5°	2184	201
15°	1675	466
25°	1125	512
35°	547	346
45°	183	148
55°	49	45
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20WFL558040D010 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2286.7
1°	2274.5
2°	2255.3
3°	2236.0
4°	2211.6
5°	2183.6
6°	2148.7
7°	2106.8
8°	2056.1
9°	2003.7
10°	1949.6
11°	1891.9
12°	1839.5
13°	1785.3
14°	1731.2
15°	1675.3
17.5°	1530.3
20°	1390.5
22.5°	1257.8
25°	1125.0
27.5°	988.8
30°	838.5
32.5°	686.5
35°	546.8
37.5°	428.0
40°	328.4
42.5°	248.1
45°	183.4
47.5°	134.5
50°	97.8
52.5°	69.9
55°	48.9
57.5°	31.4
60°	12.2
62.5°	1.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B20WFL558040D010 2LBDL*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)