

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224986

Luminaire Tested: **LSR2WM2B20FL408050D010 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224986
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2WM2B20FL408050D010 2LBDL*LI
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1836.4 lumens
Efficiency: N/A
Efficacy: 87.9 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224986

CATALOG NUMBER: LSR2WM2B20FL408050D010 2LBDL*LI

Luminous Intensity Polar Plot

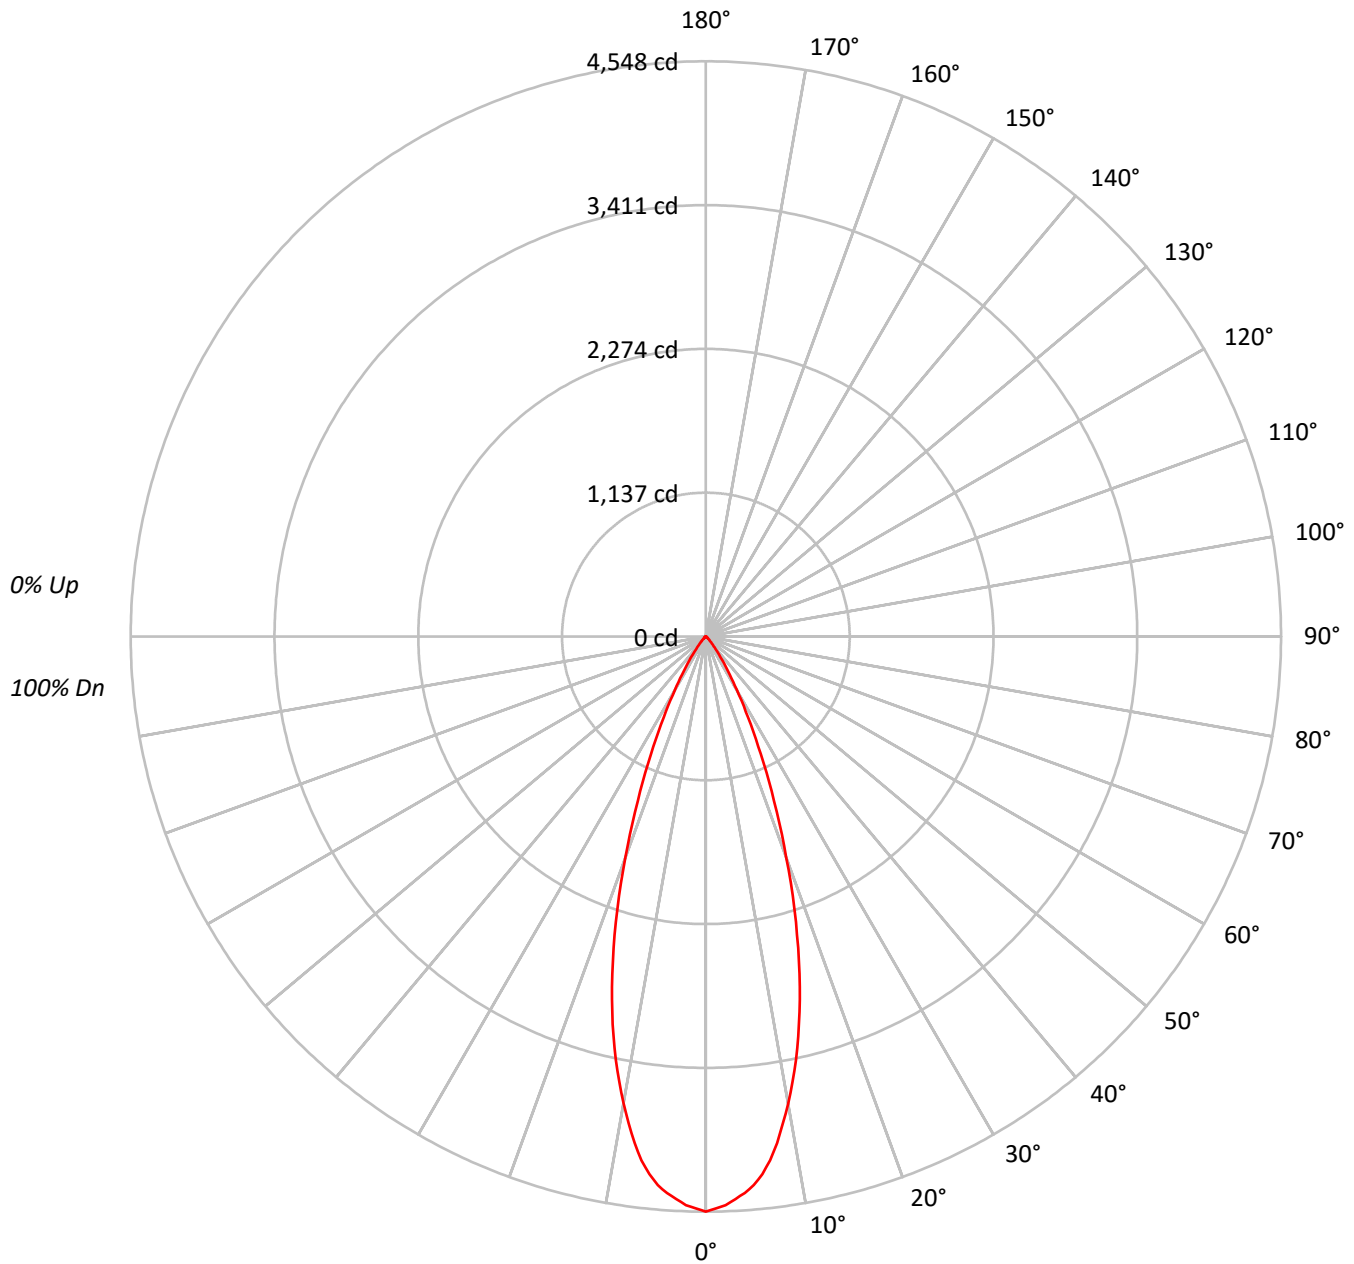



TEST NUMBER: P224986

CATALOG NUMBER: LSR2WM2B20FL408050D010 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			50
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			102
1	114	112	110	108		112	110	108	106		106	105	103			102	101	100			99
2	110	106	103	100		108	104	101	99		101	99	97			98	96	95			96
3	106	101	96	93		104	99	95	92		97	94	91			94	92	90			92
4	102	96	91	88		100	95	90	87		93	89	86			91	88	85			89
5	98	91	86	83		97	90	86	83		89	85	82			87	84	81			86
6	94	87	82	79		93	86	82	79		85	81	78			84	80	78			83
7	91	83	79	75		90	83	78	75		82	78	75			81	77	74			80
8	88	80	75	72		87	80	75	72		79	74	71			78	74	71			77
9	85	77	72	69		84	76	72	69		76	71	69			75	71	68			74
10	82	74	69	66		81	74	69	66		73	69	66			72	68	66			72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1761572
5°	1692830
10°	1473618
15°	1150698
20°	765259
25°	438202
30°	217865
35°	100152
40°	40148
45°	18351
50°	8497
55°	4795
60°	2711
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224986

CATALOG NUMBER: LSR2WM2B20FL408050D010 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	396.3	21.6
10°-20°	778.1	42.4
20°-30°	481.6	26.2
30°-40°	144.1	7.8
40°-50°	28.9	1.6
50°-60°	7.0	0.4
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1655.9	90.2
0°-40°	1800.1	98.0
0°-60°	1836.0	100.0
0°-90°	1836.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1836.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4548	
5°	4354	396
15°	2870	778
25°	1025	482
35°	212	144
45°	34	29
55°	7	7
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224986

CATALOG NUMBER: LSR2WM2B20FL408050D010 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4547.8
1°	4523.1
2°	4500.2
3°	4454.3
4°	4411.9
5°	4353.7
6°	4274.3
7°	4173.7
8°	4044.9
9°	3898.4
10°	3746.6
11°	3589.6
12°	3421.9
13°	3247.2
14°	3060.1
15°	2869.5
17.5°	2366.6
20°	1856.5
22.5°	1404.8
25°	1025.3
27.5°	720.0
30°	487.1
32.5°	321.2
35°	211.8
37.5°	132.4
40°	79.4
42.5°	51.2
45°	33.5
47.5°	21.2
50°	14.1
52.5°	10.6
55°	7.1
57.5°	5.3
60°	3.5
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224986

CATALOG NUMBER: LSR2WM2B20FL408050D010 2LBDL*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)