

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224992

Luminaire Tested: **LSR2WM2B20FL409050D010 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224992
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR2WM2B20FL409050D010 2LBDL*LI
Description: 2000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1543.2 lumens
Efficiency: N/A
Efficacy: 73.8 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224992

CATALOG NUMBER: LSR2WM2B20FL409050D010 2LBDL*LI

Luminous Intensity Polar Plot

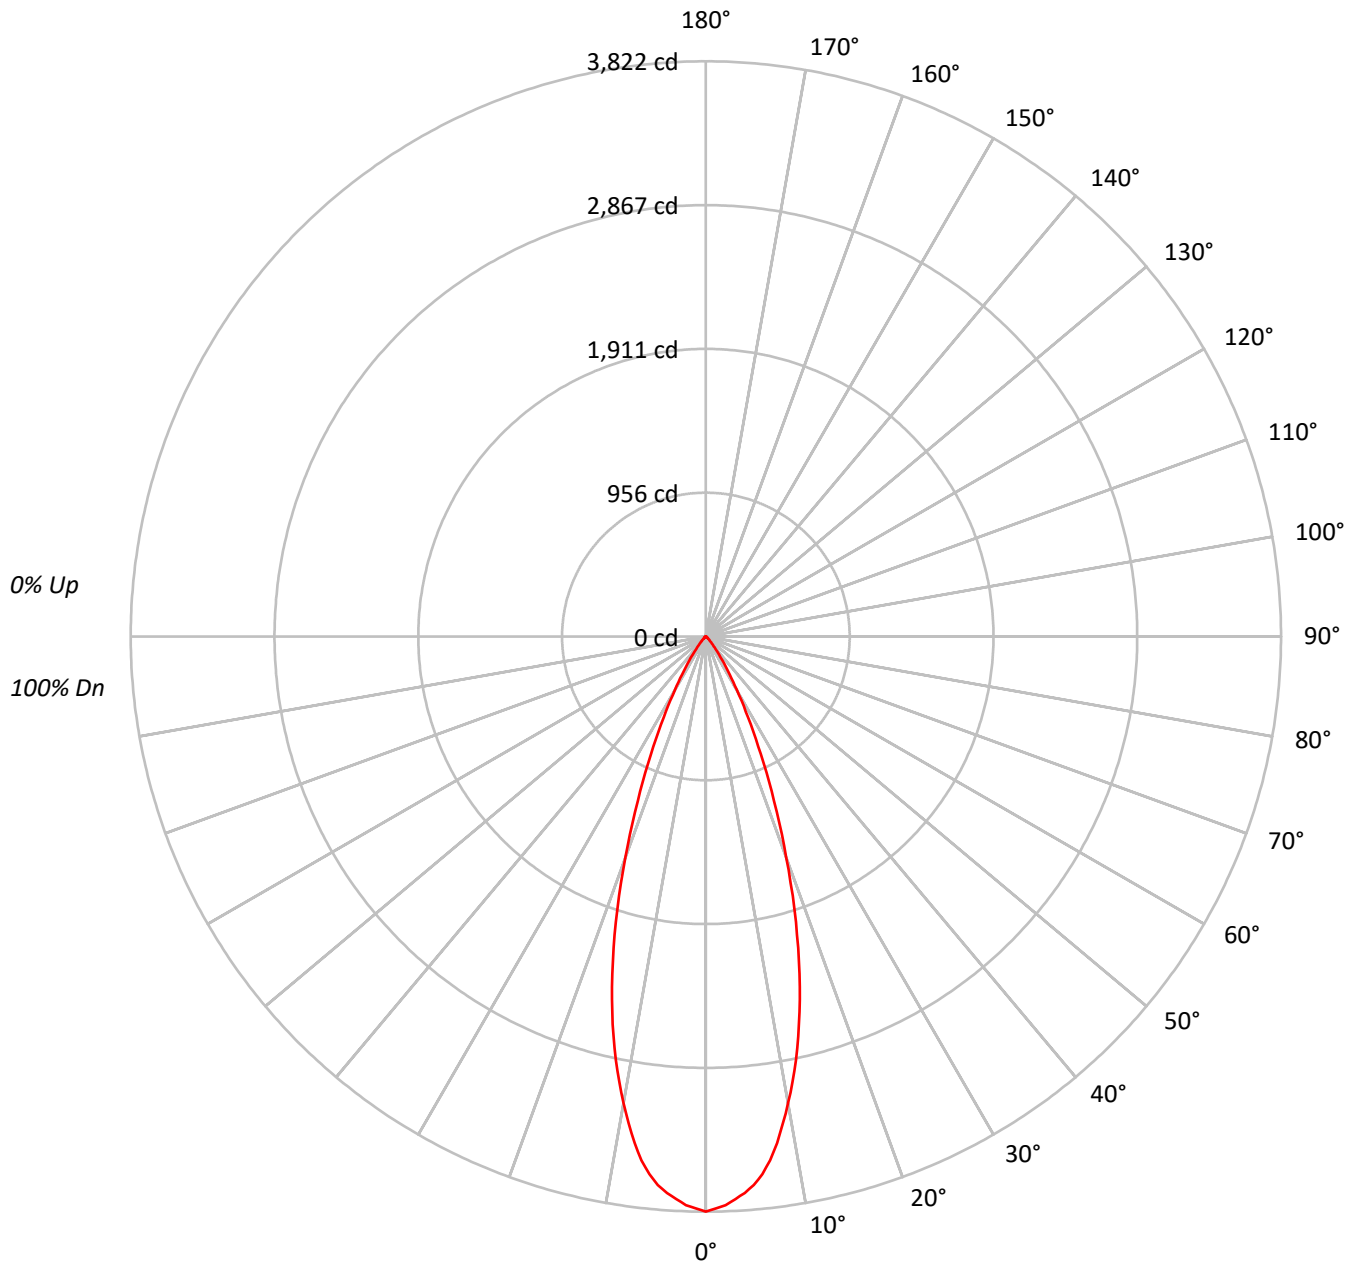



TEST NUMBER: P224992

CATALOG NUMBER: LSR2WM2B20FL409050D010 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	105	103		102	101	100		99
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96
3	106	101	96	93	104	99	95	92	97	94	91		94	92	90		92
4	102	96	91	88	100	95	90	87	93	89	86		91	88	85		89
5	98	91	86	83	97	90	86	83	89	85	82		87	84	81		86
6	94	87	82	79	93	86	82	79	85	81	78		84	80	78		83
7	91	83	79	75	90	83	78	75	82	78	75		81	77	74		80
8	88	80	75	72	87	80	75	72	79	74	71		78	74	71		77
9	85	77	72	69	84	76	72	69	76	71	69		75	71	68		74
10	82	74	69	66	81	74	69	66	73	69	66		72	68	66		72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1480320
5°	1422557
10°	1238333
15°	966996
20°	643081
25°	368238
30°	183067
35°	84169
40°	33726
45°	15448
50°	7171
55°	3984
60°	2324
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224992

CATALOG NUMBER: LSR2WM2B20FL409050D010 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	333.0	21.6
10°-20°	653.9	42.4
20°-30°	404.7	26.2
30°-40°	121.1	7.8
40°-50°	24.3	1.6
50°-60°	5.9	0.4
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1391.5	90.2
0°-40°	1512.7	98.0
0°-60°	1542.8	100.0
0°-90°	1543.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1543.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3822	
5°	3659	333
15°	2411	654
25°	862	405
35°	178	121
45°	28	24
55°	6	6
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224992

CATALOG NUMBER: LSR2WM2B20FL409050D010 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3821.7
1°	3801.0
2°	3781.7
3°	3743.1
4°	3707.5
5°	3658.6
6°	3591.9
7°	3507.3
8°	3399.1
9°	3276.0
10°	3148.4
11°	3016.4
12°	2875.6
13°	2728.7
14°	2571.5
15°	2411.4
17.5°	1988.7
20°	1560.1
22.5°	1180.5
25°	861.6
27.5°	605.1
30°	409.3
32.5°	269.9
35°	178.0
37.5°	111.2
40°	66.7
42.5°	43.0
45°	28.2
47.5°	17.8
50°	11.9
52.5°	8.9
55°	5.9
57.5°	4.4
60°	3.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224992

CATALOG NUMBER: LSR2WM2B20FL409050D010 2LBDL*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)