

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSR2B05WFL558030D010 2LBD\*H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29157)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR2B05WFL558030D010 2LBD\*H  
Description: 500 Lumen, 2inch Portfolio LED Cylinder  
WIDE FLOOD OPTIC  
SPUN ROUND TRIM WITH HAZE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 726.0 lumens  
Efficiency: N/A  
Efficacy: 99.4 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LSR2B05WFL558030D010 2LBD\*H

### Luminous Intensity Polar Plot

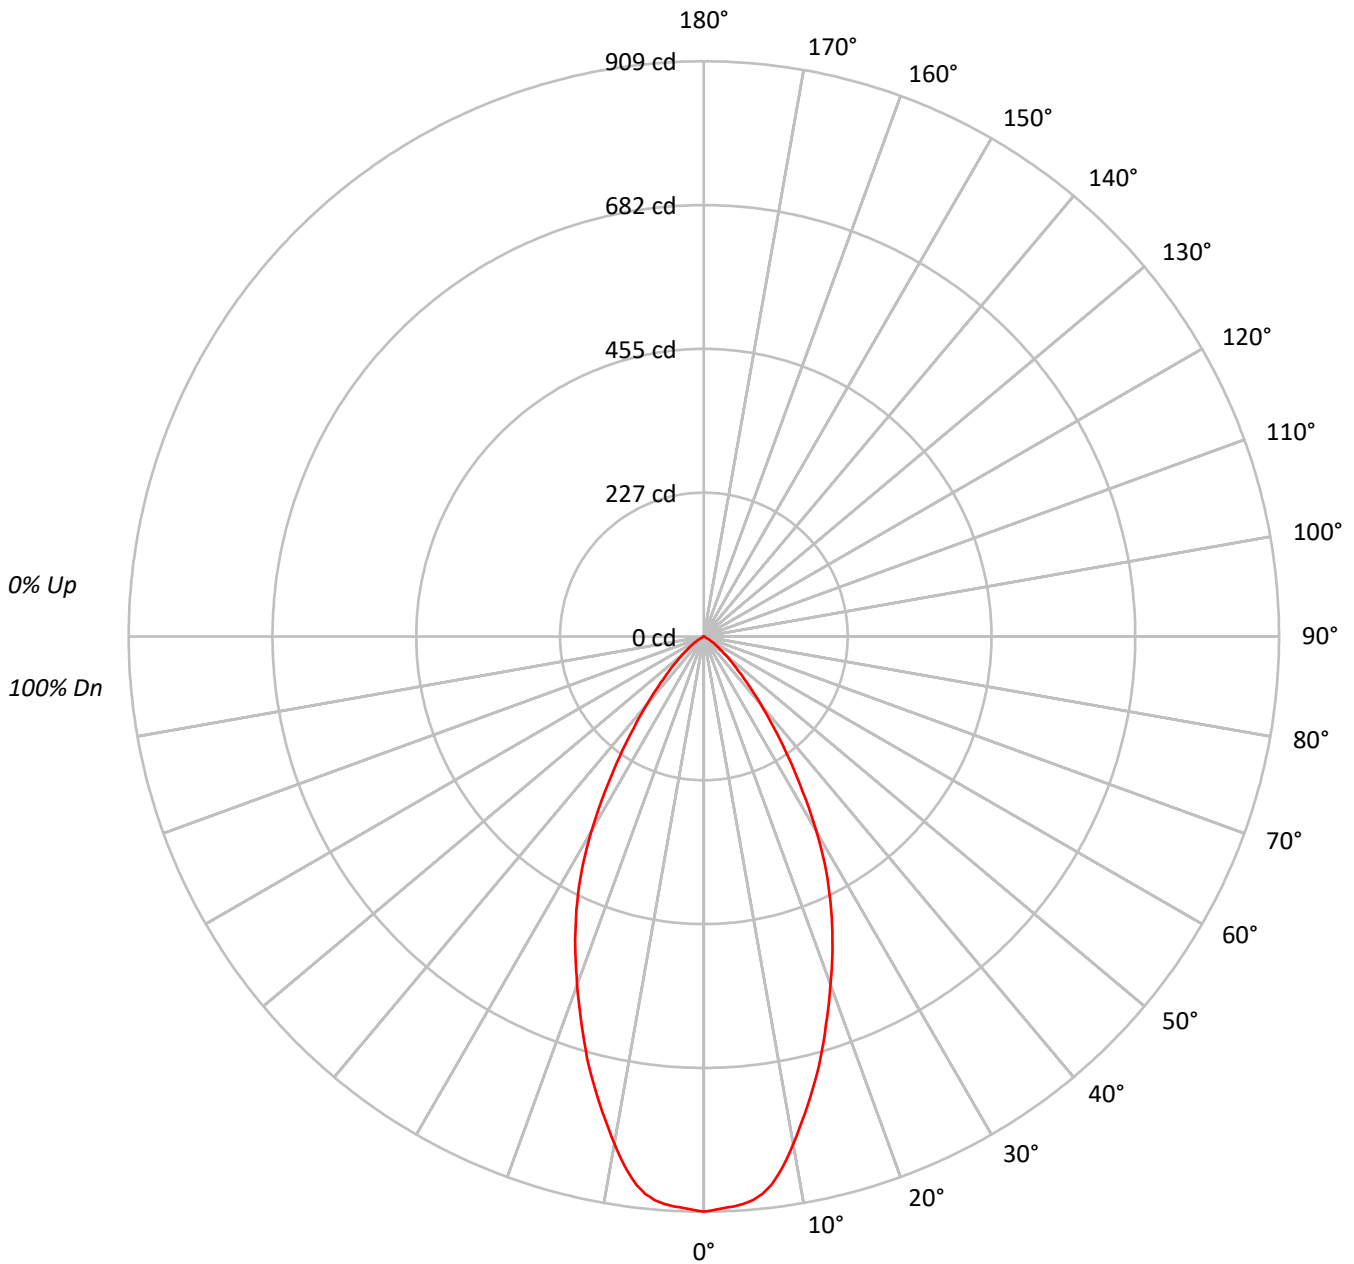



TEST NUMBER: P#

CATALOG NUMBER: LSR2B05WFL558030D010 2LBD\*H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	91	86	100	94	90	86	92	88	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69
6	87	78	72	68	86	77	71	67	76	71	67	74	70	66	73	69	66	64
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53
10	71	62	56	52	70	61	55	52	60	55	52	59	55	51	59	54	51	50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	352059
5°	347610
10°	320124
15°	281750
20°	241305
25°	203565
30°	158959
35°	109799
40°	70537
45°	43056
50°	25490
55°	14519
60°	4571
65°	642
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B05WFL558030D010 2LBD\*H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.8	11.4
10°-20°	195.2	26.9
20°-30°	216.4	29.8
30°-40°	146.9	20.2
40°-50°	63.4	8.7
50°-60°	19.9	2.7
60°-70°	1.2	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	494.5	68.1
0°-40°	641.4	88.4
0°-60°	724.7	99.8
0°-90°	726.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	726.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	909	
5°	894	83
15°	703	195
25°	476	216
35°	232	147
45°	79	63
55°	22	20
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSR2B05WFL558030D010 2LBD\*H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	908.9
1°	906.7
2°	903.7
3°	902.2
4°	899.2
5°	894.0
6°	885.9
7°	873.3
8°	856.2
9°	836.2
10°	813.9
11°	791.7
12°	769.4
13°	747.1
14°	724.9
15°	702.6
17.5°	642.5
20°	585.4
22.5°	531.2
25°	476.3
27.5°	419.2
30°	355.4
32.5°	290.8
35°	232.2
37.5°	181.8
40°	139.5
42.5°	105.4
45°	78.6
47.5°	57.9
50°	42.3
52.5°	30.4
55°	21.5
57.5°	14.1
60°	5.9
62.5°	1.5
65°	0.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSR2B05WFL558030D010 2LBD\*H

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)