

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSRWM2B05WFL559030D010 2LBDL*WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14804)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B05WFL559030D010 2LBDL*WH
Description: 500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH WHEAT HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 537.0 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.81
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LSRWM2B05WFL559030D010 2LBDL*WH

Luminous Intensity Polar Plot

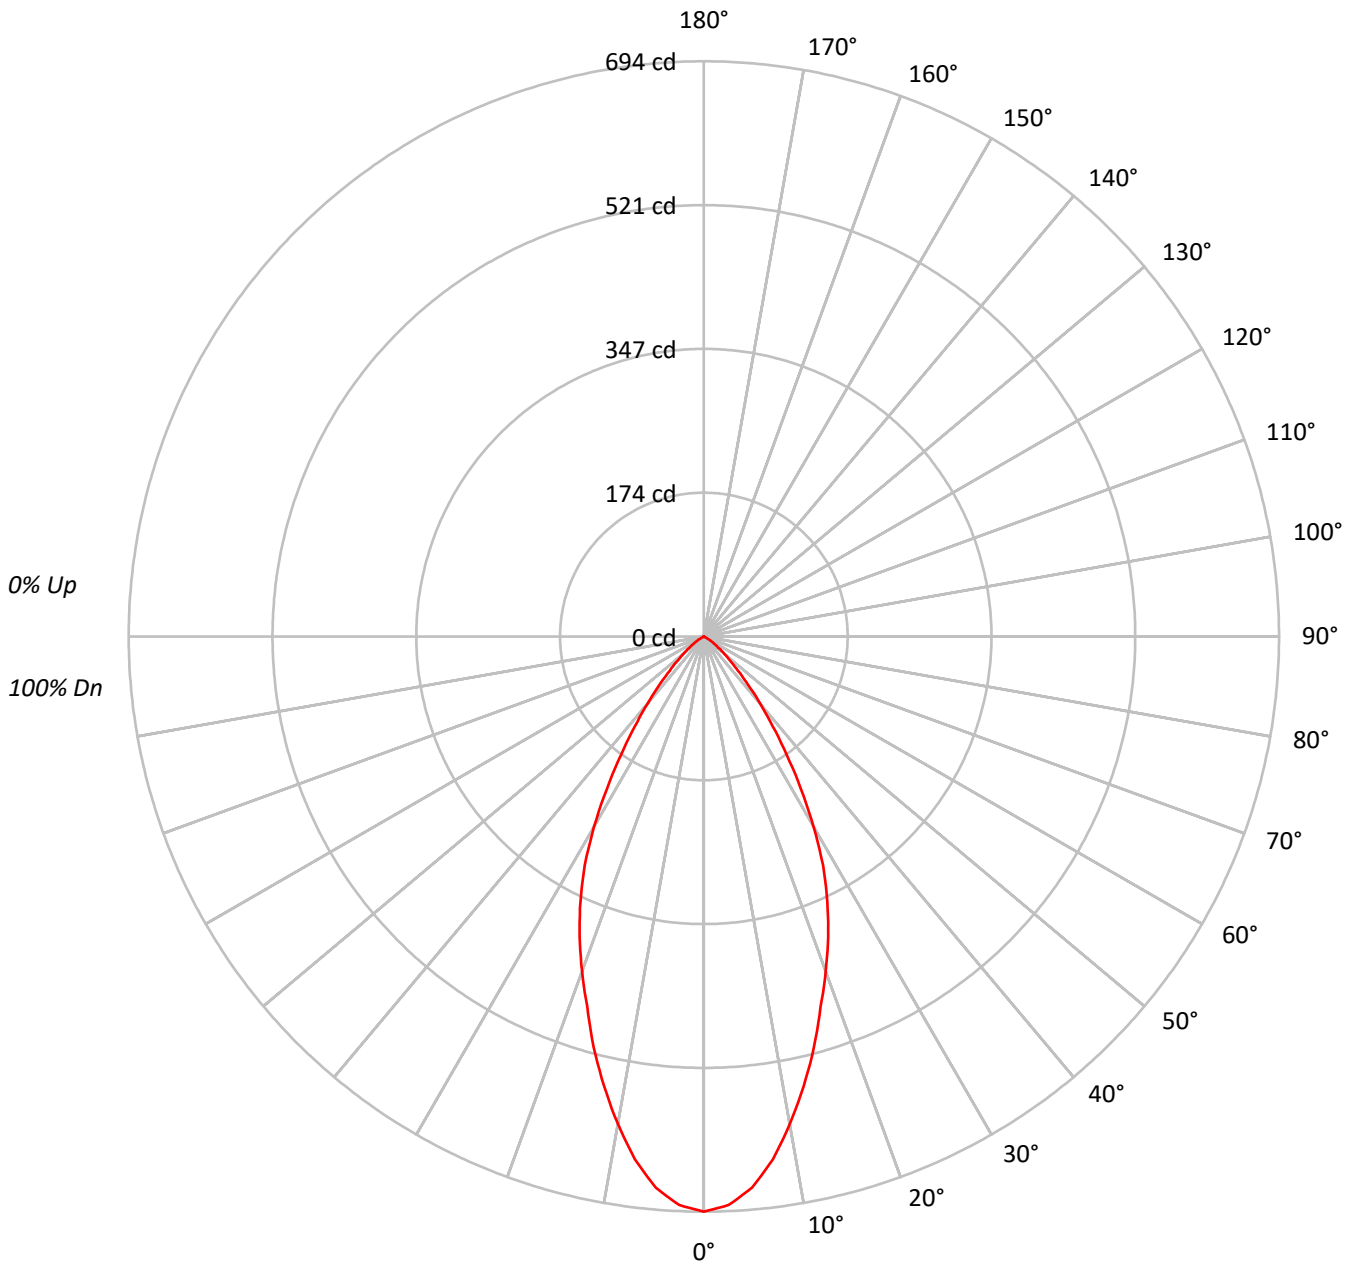



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559030D010 2LBDL*WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	90	86	100	94	90	86	92	88	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74			
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69			
6	87	78	72	68	86	77	71	67	76	71	67	74	70	66	73	69	66	64			
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	61	58	65	61	58	56			
9	75	65	59	55	74	64	59	55	64	58	55	63	58	54	62	57	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	268818
5°	259502
10°	234970
15°	205838
20°	177248
25°	150655
30°	118437
35°	82278
40°	53345
45°	31936
50°	18681
55°	10467
60°	4028
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559030D010 2LBDL*WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.5	11.4
10°-20°	142.9	26.6
20°-30°	160.1	29.8
30°-40°	110.0	20.5
40°-50°	47.3	8.8
50°-60°	14.4	2.7
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	364.5	67.9
0°-40°	474.5	88.4
0°-60°	536.2	99.9
0°-90°	537.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	537.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	694	
5°	667	61
15°	513	143
25°	352	160
35°	174	110
45°	58	47
55°	16	14
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559030D010 2LBDL*WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	694.0
2.5°	686.6
5°	667.4
7.5°	636.5
10°	597.4
12.5°	556.1
15°	513.3
17.5°	468.3
20°	430.0
22.5°	391.6
25°	352.5
27.5°	311.2
30°	264.8
32.5°	217.6
35°	174.0
37.5°	136.4
40°	105.5
42.5°	78.9
45°	58.3
47.5°	42.8
50°	31.0
52.5°	21.4
55°	15.5
57.5°	10.3
60°	5.2
62.5°	0.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)