

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSRWM2B05WFL559730D010 2LBD*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29153)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B05WFL559730D010 2LBD*LI
Description: 500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 541.0 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.8
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LSRWM2B05WFL559730D010 2LBD*LI

Luminous Intensity Polar Plot

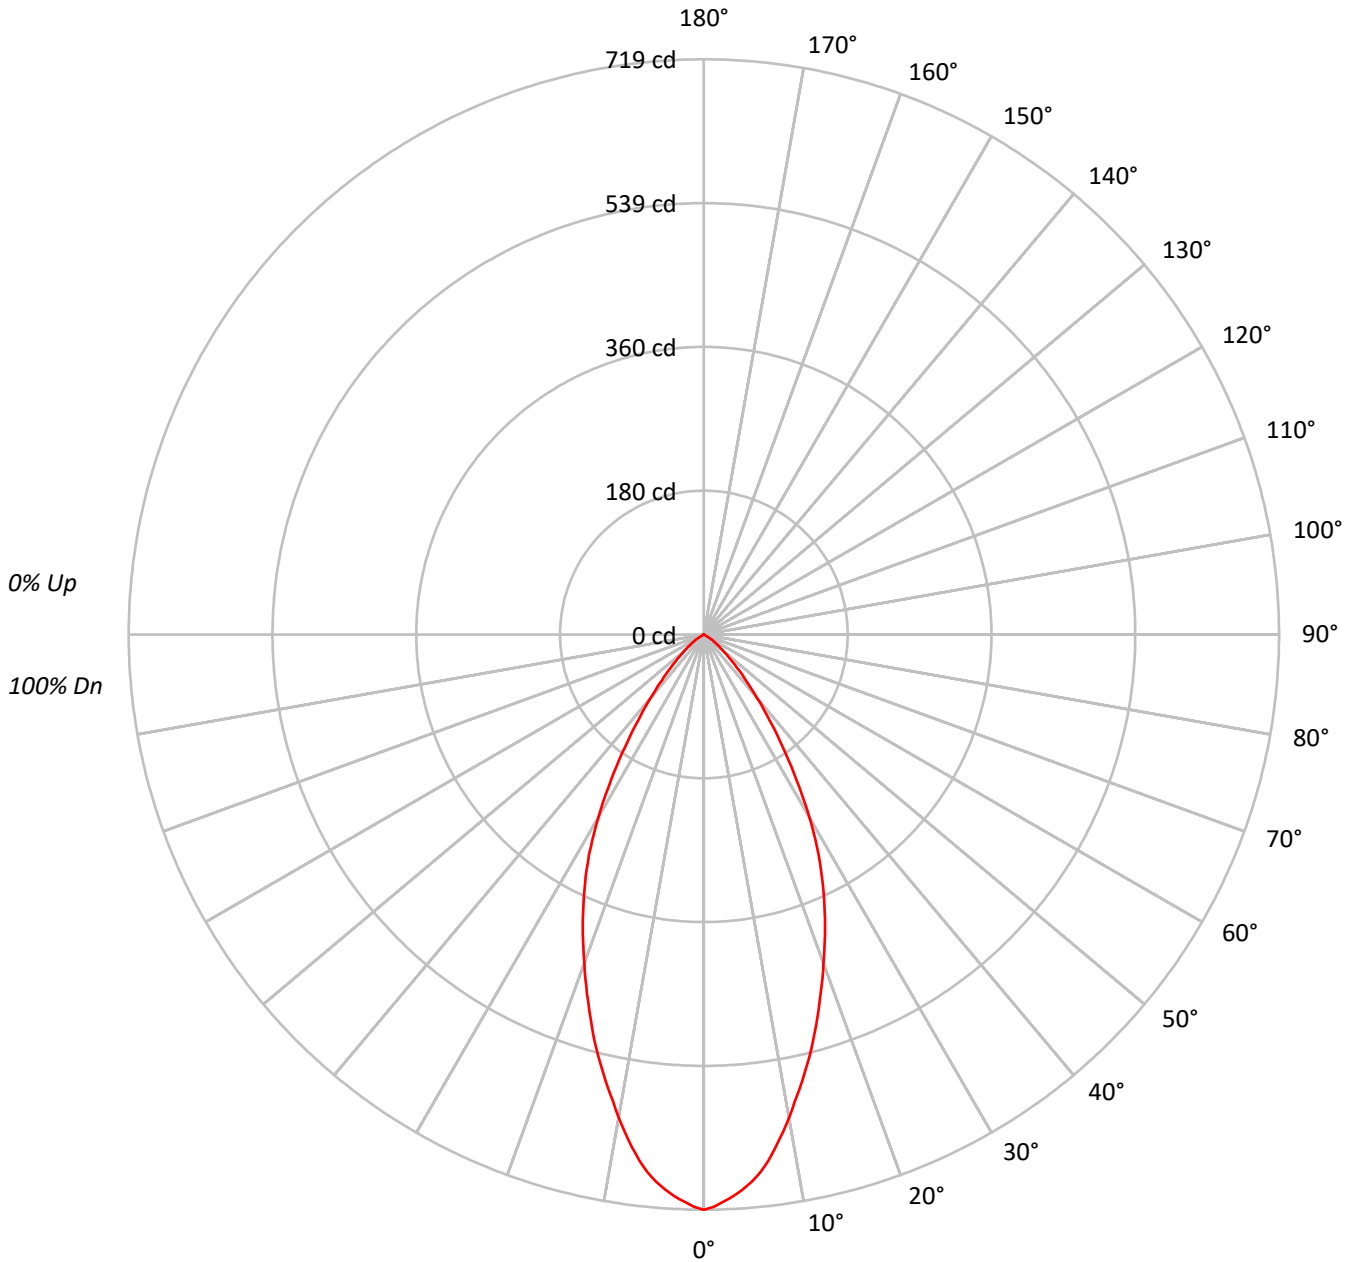



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559730D010 2LBD*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93																											
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																											
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																											
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75																											
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																											
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																											
7	83	73	67	63	82	73	67	63	72	66	63	70	66	62	69	65	62	61																											
8	79	69	63	59	78	69	63	59	68	62	59	66	62	58	66	61	58	57																											
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53																											
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	278579
5°	267045
10°	241185
15°	211292
20°	180257
25°	151210
30°	117945
35°	81332
40°	52233
45°	31607
50°	18560
55°	10400
60°	2944
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559730D010 2LBD*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.2	11.7
10°-20°	146.4	27.1
20°-30°	160.9	29.7
30°-40°	108.9	20.1
40°-50°	46.7	8.6
50°-60°	14.3	2.6
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.6	68.5
0°-40°	479.5	88.6
0°-60°	540.4	99.9
0°-90°	541.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	541.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	719	
5°	687	63
15°	527	146
25°	354	161
35°	172	109
45°	58	47
55°	15	14
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559730D010 2LBD*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	719.2
1°	715.4
2°	709.3
3°	703.3
4°	695.6
5°	686.8
6°	675.8
7°	662.6
8°	646.7
9°	630.2
10°	613.2
11°	595.0
12°	578.6
13°	561.5
14°	544.5
15°	526.9
17.5°	481.3
20°	437.3
22.5°	395.6
25°	353.8
27.5°	311.0
30°	263.7
32.5°	215.9
35°	172.0
37.5°	134.6
40°	103.3
42.5°	78.0
45°	57.7
47.5°	42.3
50°	30.8
52.5°	22.0
55°	15.4
57.5°	9.9
60°	3.8
62.5°	0.5
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B05WFL559730D010 2LBD*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)