

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264196

Luminaire Tested: **LD2B10D010 EU2B1010SP159024 2LBSQC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264196  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B1010SP159024 2LBSQC\*MW  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 626.0 lumens  
Efficiency: N/A  
Efficacy: 60.8 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264196

CATALOG NUMBER: LD2B10D010 EU2B1010SP159024 2LBSQC\*MW

### Luminous Intensity Polar Plot

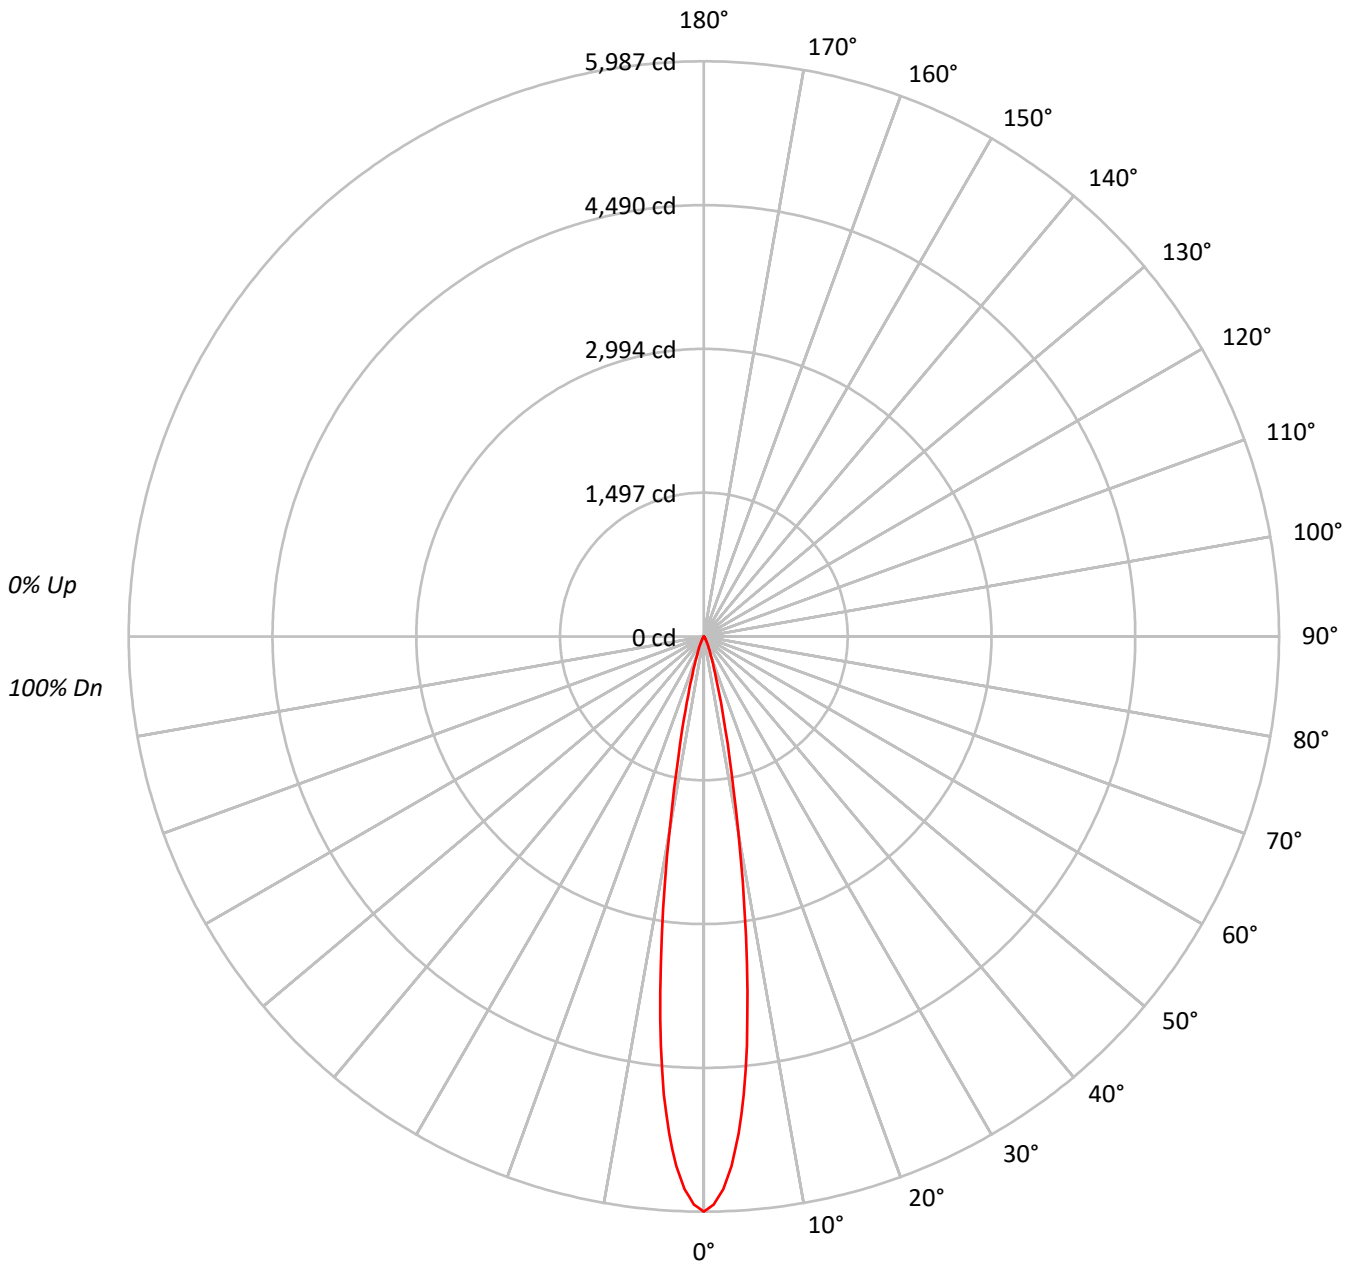



TEST NUMBER: P264196

CATALOG NUMBER: LD2B10D010 EU2B1010SP159024 2LBSQC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	98	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	94	94	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90	90	90	90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	87	87	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	86	86	86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85	85	85	85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83	83	83	83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2953856
5°	2367674
10°	1033406
15°	320250
20°	111620
25°	49319
30°	22332
35°	11624
40°	6634
45°	3140
50°	1996
55°	1118
60°	592
65°	700
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264196

CATALOG NUMBER: LD2B10D010 EU2B1010SP159024 2LBSQC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	363.0	58.0
10°-20°	198.8	31.8
20°-30°	45.3	7.2
30°-40°	13.0	2.1
40°-50°	4.0	0.6
50°-60°	1.2	0.2
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	607.2	97.0
0°-40°	620.2	99.1
0°-60°	625.4	99.9
0°-90°	626.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	626.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5987	
5°	4781	363
15°	627	199
25°	91	45
35°	19	13
45°	4	4
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264196

CATALOG NUMBER: LD2B10D010 EU2B1010SP159024 2LBSQC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5987.2
1°	5912.7
2°	5757.9
3°	5517.6
4°	5187.4
5°	4780.8
6°	4282.3
7°	3725.3
8°	3143.9
9°	2581.2
10°	2062.8
11°	1624.0
12°	1278.4
13°	1006.0
14°	794.7
15°	627.0
16°	494.6
17°	393.8
18°	316.7
19°	257.6
20°	212.6
22.5°	137.5
25°	90.6
26°	76.4
27°	64.9
28°	54.6
29°	45.6
30°	39.2
32.5°	27.0
35°	19.3
37.5°	14.1
40°	10.3
42.5°	7.1
45°	4.5
47.5°	3.2
50°	2.6
52.5°	1.9
55°	1.3
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.6



TEST NUMBER: P264196

CATALOG NUMBER: LD2B10D010 EU2B1010SP159024 2LBSQC\*MW

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)