

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225419

Luminaire Tested: **LD2B10D010 EU2B10FL408027 2LBDC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225419
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14834)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10FL408027 2LBDC*MB
Description: 1000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
CAST ROUND TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 996.6 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225419

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDC*MB

Luminous Intensity Polar Plot

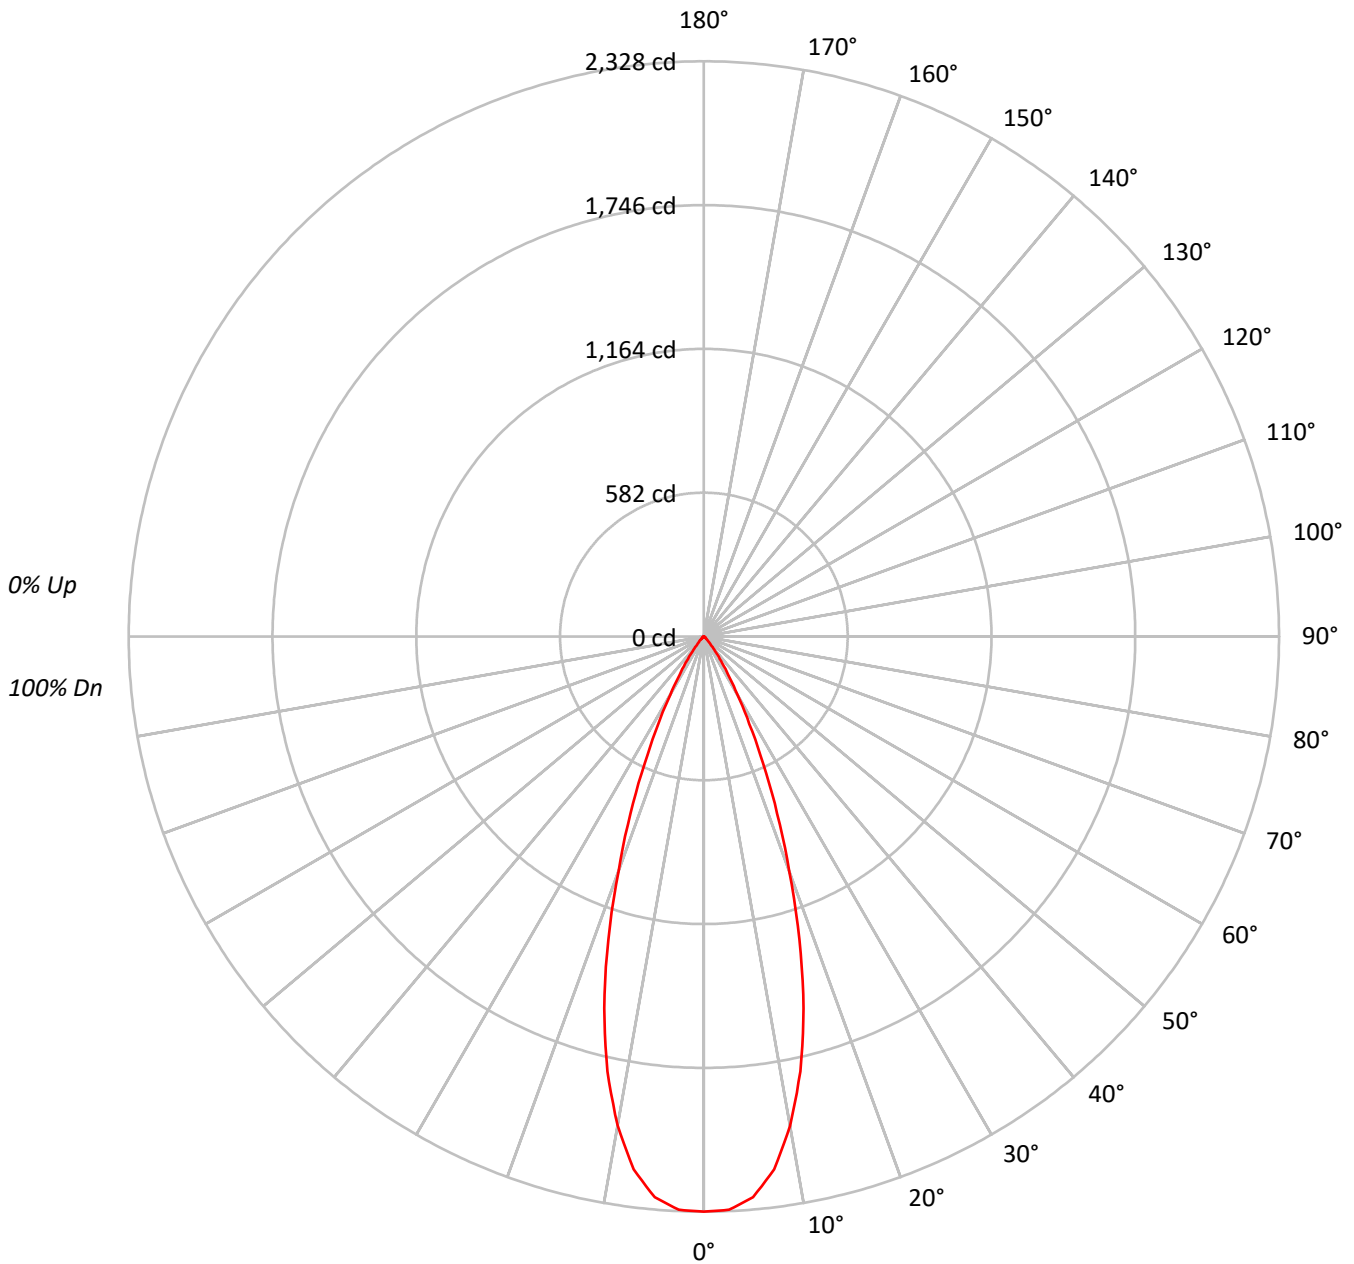



TEST NUMBER: P225419

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95				95
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	95	94	92	91				91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87				87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83				83
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79				79
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76				76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72				72
8	87	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	69				69
9	84	77	72	69	83	76	72	68	75	71	68	74	71	68	74	70	68	67				67
10	82	74	69	66	81	73	69	66	73	68	65	72	68	65	71	68	65	64				64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	901703
5°	886056
10°	790419
15°	624774
20°	416574
25°	241688
30°	120941
35°	56885
40°	22248
45°	9915
50°	4700
55°	2634
60°	1007
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225419

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.9	21.0
10°-20°	421.7	42.3
20°-30°	265.3	26.6
30°-40°	81.1	8.1
40°-50°	15.9	1.6
50°-60°	3.6	0.4
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	895.9	89.9
0°-40°	977.0	98.0
0°-60°	996.5	100.0
0°-90°	996.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	996.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2328	
5°	2279	209
15°	1558	422
25°	566	265
35°	120	81
45°	18	16
55°	4	4
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225419

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	2327.9
2.5°	2322.8
5°	2278.8
7.5°	2175.2
10°	2009.6
12.5°	1802.6
15°	1558.0
17.5°	1286.3
20°	1010.6
22.5°	775.1
25°	565.5
27.5°	398.6
30°	270.4
32.5°	182.5
35°	120.3
37.5°	73.8
40°	44.0
42.5°	28.5
45°	18.1
47.5°	11.6
50°	7.8
52.5°	5.2
55°	3.9
57.5°	2.6
60°	1.3
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)