

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224424

Luminaire Tested: **LD2B10D010 EU2B10FL408027 2LBDSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224424
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10FL408027 2LBDSQC*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1003.9 lumens
Efficiency: N/A
Efficacy: 97.5 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224424

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDSQC*MW

Luminous Intensity Polar Plot

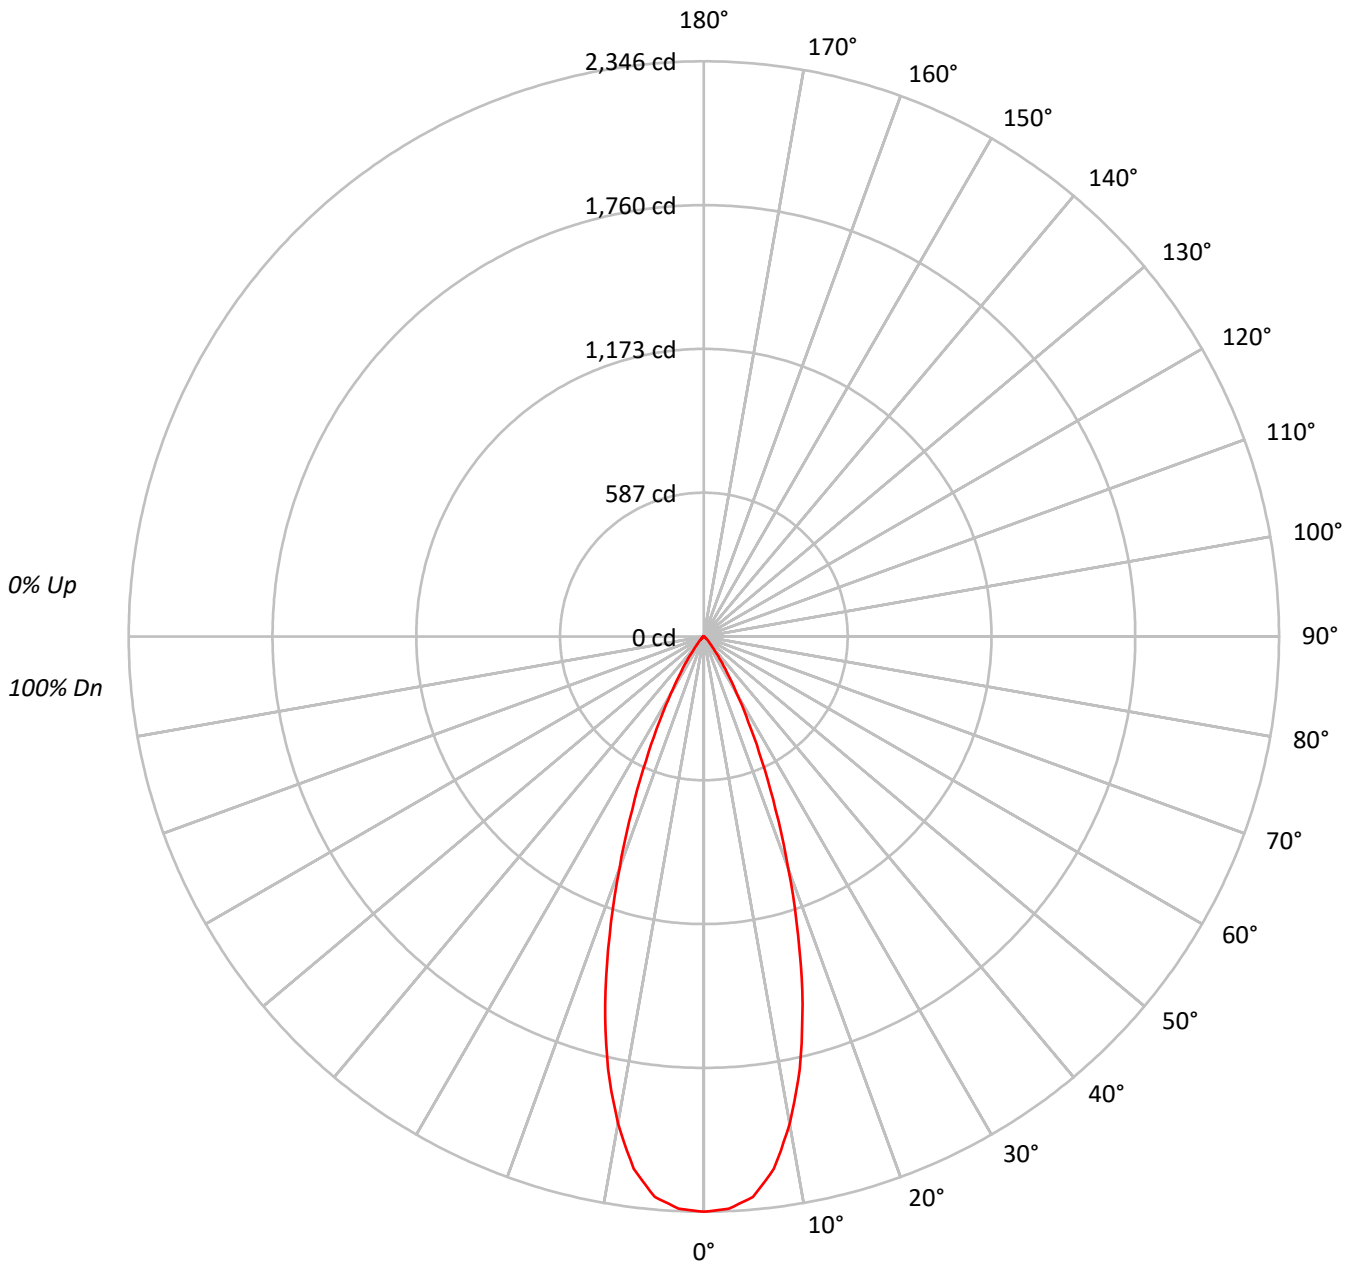



TEST NUMBER: P224424

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95				95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91				91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86				86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82				82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79				79
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75				75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72				72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69				69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66				66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64				64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	908752
5°	892199
10°	793133
15°	623771
20°	415049
25°	238312
30°	120360
35°	56649
40°	22805
45°	11284
50°	6207
55°	4322
60°	4028
65°	2383
70°	2945
75°	1946
80°	2900
85°	0



TEST NUMBER: P224424

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	210.1	20.9
10°-20°	421.3	42.0
20°-30°	262.1	26.1
30°-40°	80.6	8.0
40°-50°	17.7	1.8
50°-60°	6.3	0.6
60°-70°	3.2	0.3
70°-80°	1.9	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	893.6	89.0
0°-40°	974.2	97.0
0°-60°	998.3	99.4
0°-90°	1003.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1003.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2346	
5°	2295	210
15°	1556	421
25°	558	262
35°	120	81
45°	21	18
55°	6	6
65°	3	3
75°	1	2
85°	0	1
90°	0	



TEST NUMBER: P224424

CATALOG NUMBER: LD2B10D010 EU2B10FL408027 2LBDSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2346.1
2.5°	2335.8
5°	2294.6
7.5°	2190.3
10°	2016.5
12.5°	1807.9
15°	1555.5
17.5°	1279.9
20°	1006.9
22.5°	763.6
25°	557.6
27.5°	392.7
30°	269.1
32.5°	181.6
35°	119.8
37.5°	72.1
40°	45.1
42.5°	30.9
45°	20.6
47.5°	14.2
50°	10.3
52.5°	9.0
55°	6.4
57.5°	5.2
60°	5.2
62.5°	3.9
65°	2.6
67.5°	2.6
70°	2.6
72.5°	2.6
75°	1.3
77.5°	1.3
80°	1.3
82.5°	1.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)