

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P265182

Luminaire Tested: **LD2B10D010 EU2B1010SP159727 2LBLC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P265182  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B1010SP159727 2LBLC\*MMS  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 645.0 lumens  
Efficiency: N/A  
Efficacy: 62.6 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P265182

CATALOG NUMBER: LD2B10D010 EU2B1010SP159727 2LBLEC\*MMS

### Luminous Intensity Polar Plot

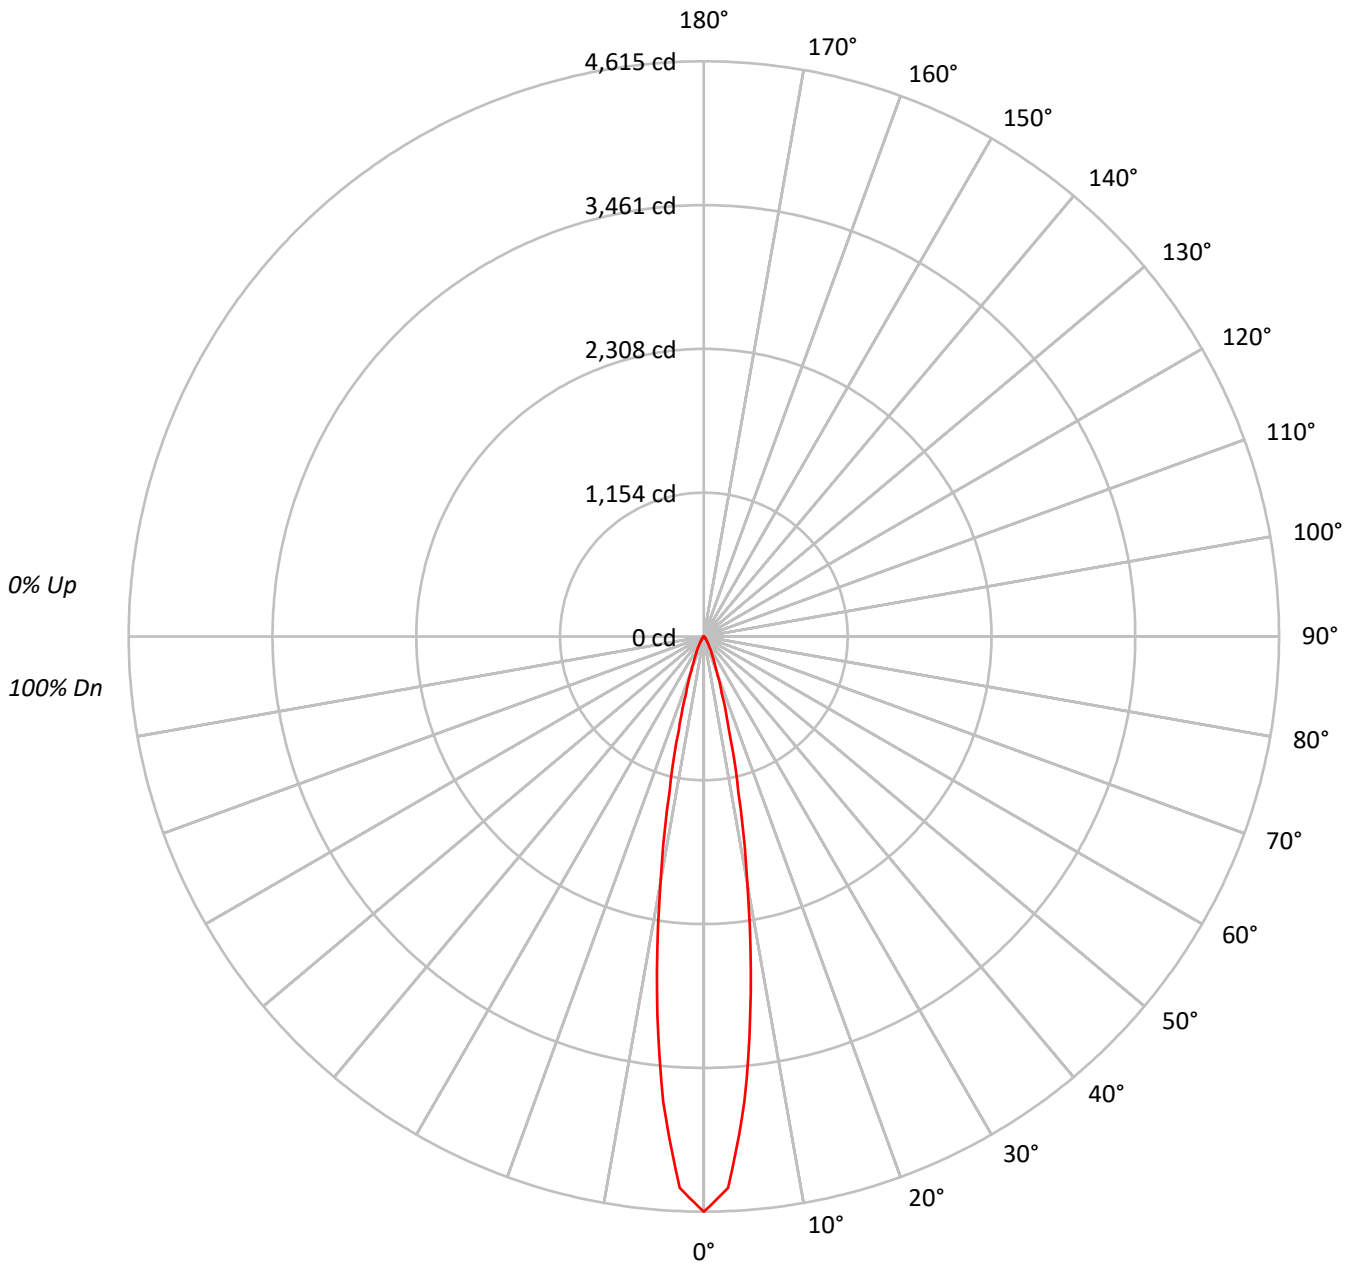



TEST NUMBER: P265182

CATALOG NUMBER: LD2B10D010 EU2B1010SP159727 2LBLC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97				97															
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94				94															
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92				92															
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89				89															
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87				87															
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85				85															
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83				83															
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81				81															
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79				79															
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78				78															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2276963
5°	1853212
10°	1001094
15°	399163
20°	160028
25°	76647
30°	39764
35°	21020
40°	11657
45°	7187
50°	4989
55°	3355
60°	2565
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P265182

CATALOG NUMBER: LD2B10D010 EU2B1010SP159727 2LBLC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	300.9	46.7
10°-20°	237.4	36.8
20°-30°	70.1	10.9
30°-40°	23.3	3.6
40°-50°	8.7	1.4
50°-60°	3.9	0.6
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	608.4	94.3
0°-40°	631.7	97.9
0°-60°	644.4	99.9
0°-90°	645.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	645.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4615	
5°	3742	301
15°	782	237
25°	141	70
35°	35	23
45°	10	9
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P265182

CATALOG NUMBER: LD2B10D010 EU2B1010SP159727 2LBLC\*MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4615.2
2.5°	4429.2
5°	3742.0
7.5°	2883.1
10°	1998.3
12.5°	1278.8
15°	781.5
17.5°	476.6
20°	304.8
22.5°	204.1
25°	140.8
27.5°	99.5
30°	69.8
32.5°	49.1
35°	34.9
37.5°	24.5
40°	18.1
42.5°	14.2
45°	10.3
47.5°	9.0
50°	6.5
52.5°	5.2
55°	3.9
57.5°	3.9
60°	2.6
62.5°	1.3
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)