

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225000

Luminaire Tested: **LD2B10D010 EU2B10FL408030 2LBDL\*LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P225000  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (152)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B10FL408030 2LBDL\*LI  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 967.3 lumens  
Efficiency: N/A  
Efficacy: 93.9 lumens/watt  
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P225000

CATALOG NUMBER: LD2B10D010 EU2B10FL408030 2LBDL\*LI

### Luminous Intensity Polar Plot

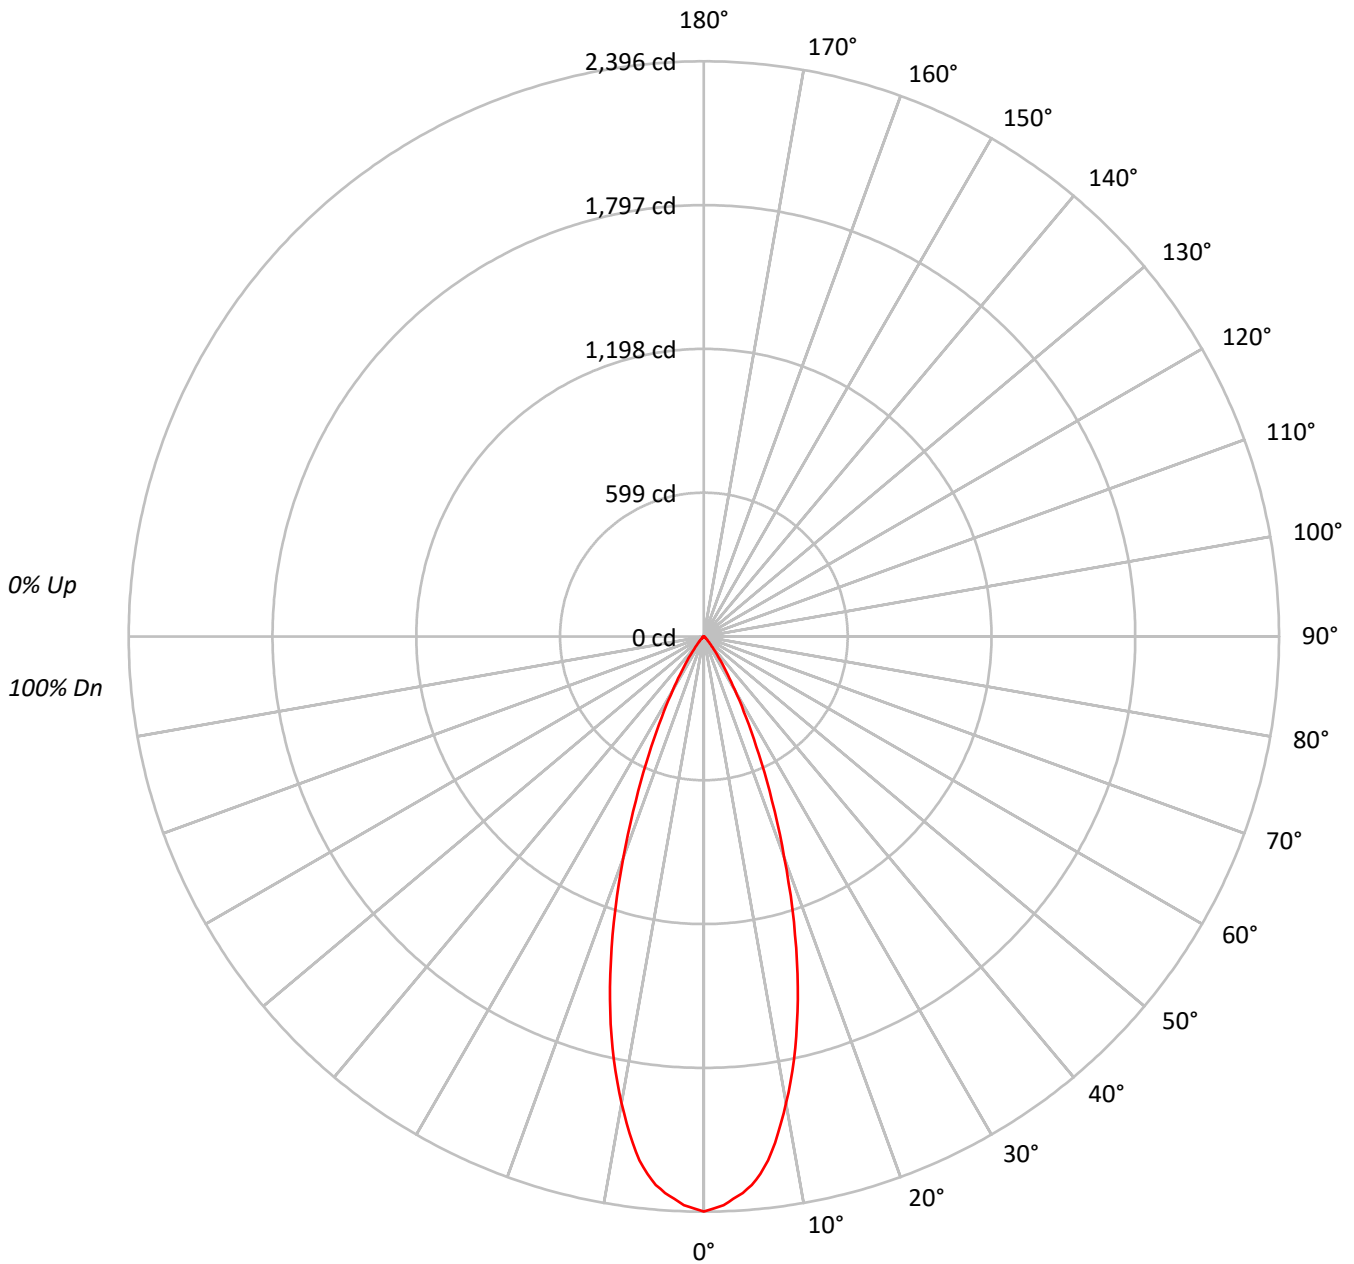



TEST NUMBER: P225000

CATALOG NUMBER: LD2B10D010 EU2B10FL408030 2LBDL\*LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96			96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91			91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87			87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83			83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79			79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76			76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73			73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70			70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67			67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65			65

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	927887
5°	891694
10°	776220
15°	606127
20°	403095
25°	230833
30°	114769
35°	52724
40°	21136
45°	9696
50°	4459
55°	2499
60°	1472
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225000

CATALOG NUMBER: LD2B10D010 EU2B10FL408030 2LBDL\*LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	208.7	21.6
10°-20°	409.9	42.4
20°-30°	253.7	26.2
30°-40°	75.9	7.8
40°-50°	15.2	1.6
50°-60°	3.7	0.4
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	872.3	90.2
0°-40°	948.2	98.0
0°-60°	967.1	100.0
0°-90°	967.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	967.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2396	
5°	2293	209
15°	1512	410
25°	540	254
35°	112	76
45°	18	15
55°	4	4
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225000

CATALOG NUMBER: LD2B10D010 EU2B10FL408030 2LBDL\*LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2395.5
1°	2382.5
2°	2370.4
3°	2346.2
4°	2323.9
5°	2293.3
6°	2251.4
7°	2198.4
8°	2130.6
9°	2053.4
10°	1973.5
11°	1890.8
12°	1802.4
13°	1710.4
14°	1611.9
15°	1511.5
17.5°	1246.6
20°	977.9
22.5°	739.9
25°	540.1
27.5°	379.3
30°	256.6
32.5°	169.2
35°	111.5
37.5°	69.7
40°	41.8
42.5°	27.0
45°	17.7
47.5°	11.2
50°	7.4
52.5°	5.6
55°	3.7
57.5°	2.8
60°	1.9
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P225000

CATALOG NUMBER: LD2B10D010 EU2B10FL408030 2LBDL\*LI

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)