

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10WFL558030 2LBDLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10WFL558030 2LBDLC*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 874.0 lumens
Efficiency: N/A
Efficacy: 84.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558030 2LBDLC*MW

Luminous Intensity Polar Plot

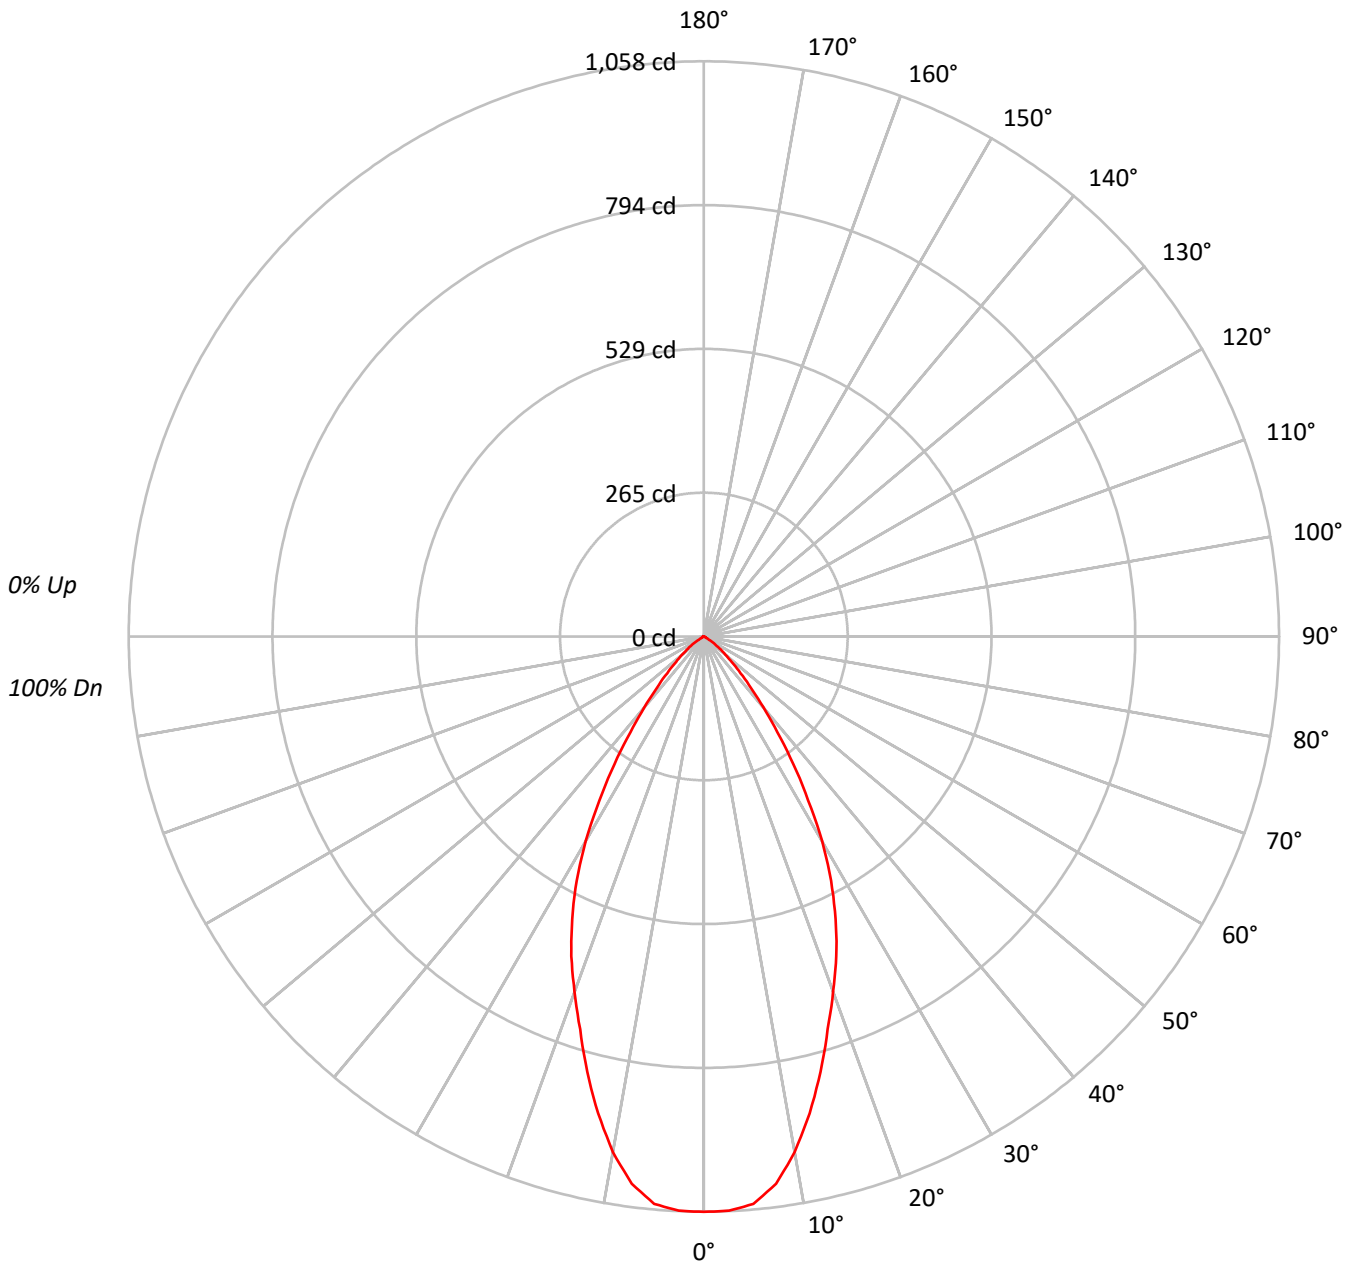



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558030 2LBDLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	409928
5°	407334
10°	378690
15°	332437
20°	286565
25°	245065
30°	194472
35°	135570
40°	85757
45°	52369
50°	30974
55°	16950
60°	3719
65°	3300
70°	2718
75°	3592
80°	2677
85°	5333



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558030 2LBDLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.2	11.1
10°-20°	230.9	26.4
20°-30°	260.5	29.8
30°-40°	180.2	20.6
40°-50°	76.8	8.8
50°-60°	22.2	2.5
60°-70°	3.3	0.4
70°-80°	2.1	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	588.6	67.3
0°-40°	768.8	88.0
0°-60°	867.9	99.3
0°-90°	874.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	874.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1058	
5°	1048	97
15°	829	231
25°	573	260
35°	287	180
45°	96	77
55°	25	22
65°	4	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL558030 2LBDLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1058.3
2.5°	1057.1
5°	1047.6
7.5°	1015.3
10°	962.8
12.5°	898.3
15°	829.0
17.5°	757.3
20°	695.2
22.5°	636.7
25°	573.4
27.5°	506.5
30°	434.8
32.5°	357.2
35°	286.7
37.5°	222.2
40°	169.6
42.5°	127.8
45°	95.6
47.5°	69.3
50°	51.4
52.5°	37.0
55°	25.1
57.5°	10.8
60°	4.8
62.5°	3.6
65°	3.6
67.5°	2.4
70°	2.4
72.5°	2.4
75°	2.4
77.5°	1.2
80°	1.2
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)