

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264300

Luminaire Tested: **LD2B10D010 EU2B1010SP159030 2LBSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264300
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B1010SP159030 2LBSQC*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 704.0 lumens
Efficiency: N/A
Efficacy: 68.3 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264300

CATALOG NUMBER: LD2B10D010 EU2B1010SP159030 2LBSQC*MW

Luminous Intensity Polar Plot

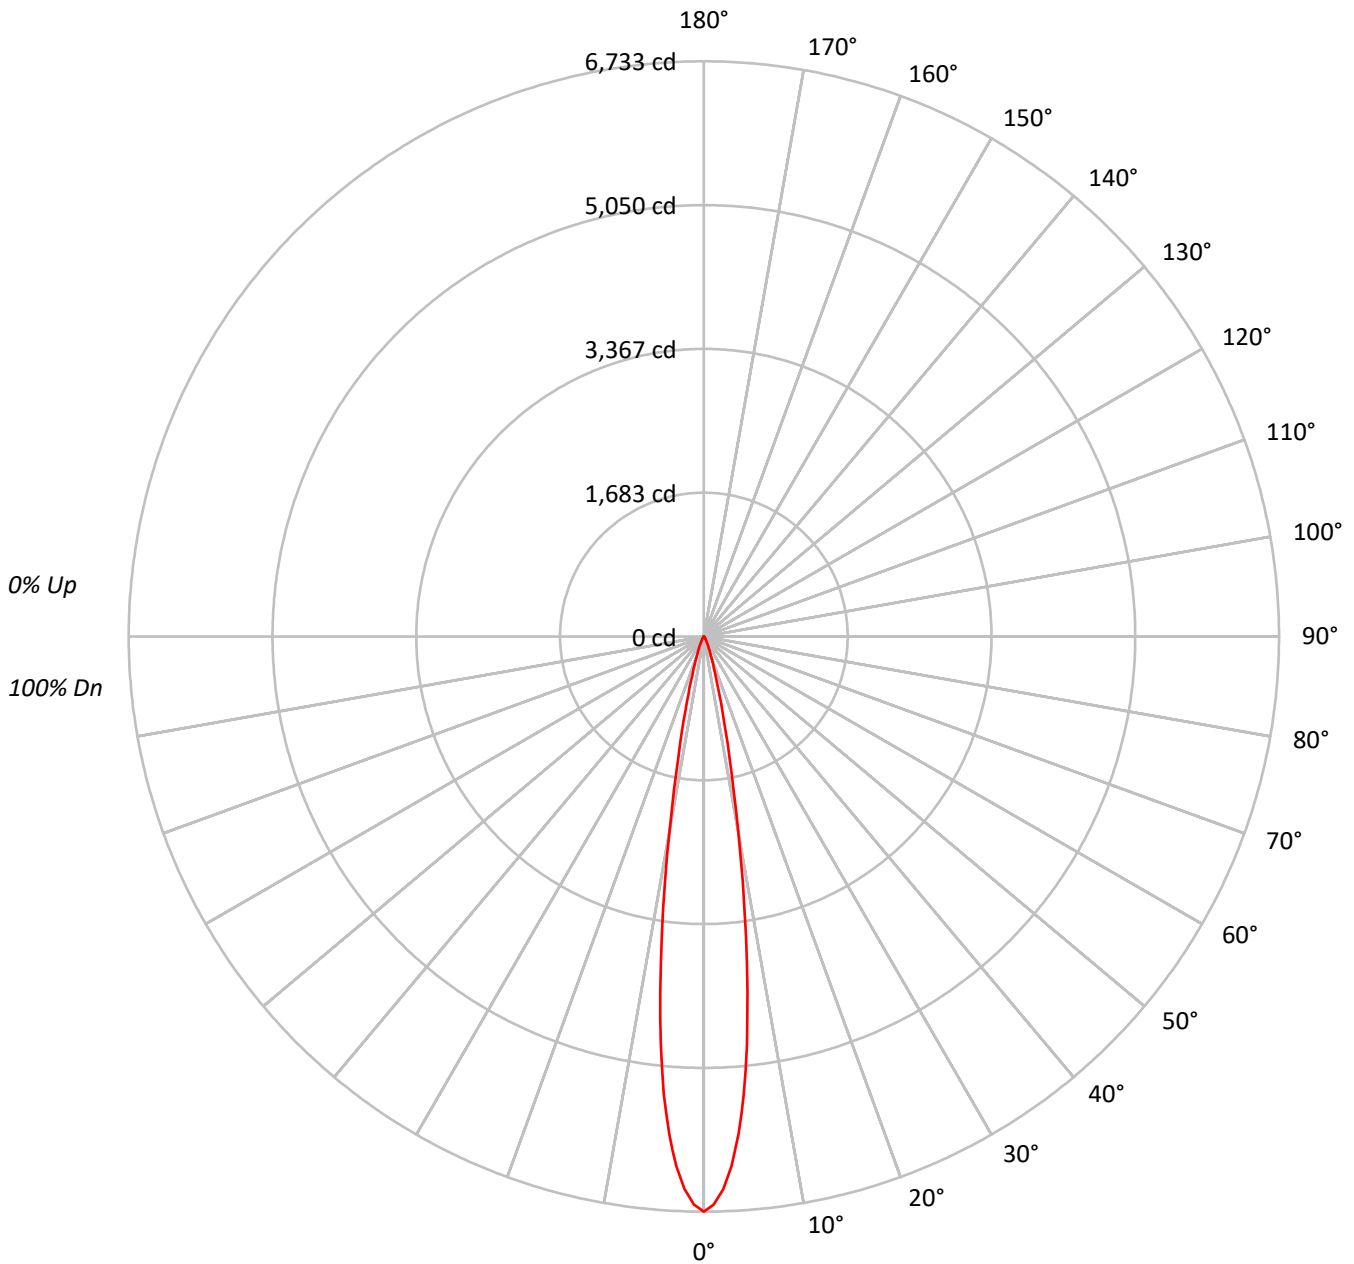



TEST NUMBER: P264300

CATALOG NUMBER: LD2B10D010 EU2B1010SP159030 2LBSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 116 | 114 | 112 | 111 | 113 | 112 | 110 | 109 | 108 | 107 | 106 | 104 | 103 | 102 | 101 | 100 | 100 | 98 |
| 2 | 113 | 109 | 107 | 105 | 111 | 108 | 106 | 104 | 105 | 103 | 101 | 102 | 101 | 99 | 99 | 98 | 97 | 96 |
| 3 | 110 | 106 | 103 | 100 | 108 | 105 | 102 | 100 | 102 | 100 | 98 | 100 | 98 | 97 | 98 | 96 | 95 | 94 |
| 4 | 107 | 103 | 99 | 97 | 106 | 102 | 99 | 96 | 100 | 97 | 95 | 98 | 96 | 94 | 96 | 95 | 93 | 92 |
| 5 | 105 | 100 | 97 | 94 | 104 | 99 | 96 | 94 | 98 | 95 | 93 | 96 | 94 | 92 | 95 | 93 | 91 | 90 |
| 6 | 103 | 98 | 94 | 92 | 102 | 97 | 94 | 91 | 96 | 93 | 91 | 95 | 92 | 90 | 93 | 91 | 90 | 89 |
| 7 | 101 | 95 | 92 | 90 | 100 | 95 | 92 | 89 | 94 | 91 | 89 | 93 | 90 | 89 | 92 | 90 | 88 | 87 |
| 8 | 99 | 93 | 90 | 88 | 98 | 93 | 90 | 88 | 92 | 89 | 87 | 91 | 89 | 87 | 91 | 88 | 87 | 86 |
| 9 | 97 | 92 | 88 | 86 | 96 | 91 | 88 | 86 | 91 | 88 | 86 | 90 | 87 | 86 | 89 | 87 | 85 | 85 |
| 10 | 95 | 90 | 87 | 85 | 95 | 90 | 87 | 85 | 89 | 86 | 85 | 89 | 86 | 84 | 88 | 86 | 84 | 83 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 3321904 |
| 5° | 2662642 |
| 10° | 1162156 |
| 15° | 360141 |
| 20° | 125533 |
| 25° | 55471 |
| 30° | 25123 |
| 35° | 13070 |
| 40° | 7471 |
| 45° | 3558 |
| 50° | 2226 |
| 55° | 1204 |
| 60° | 691 |
| 65° | 817 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P264300

CATALOG NUMBER: LD2B10D010 EU2B1010SP159030 2LBSQC*MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 408.3 | 58.0 |
| 10°-20° | 223.6 | 31.8 |
| 20°-30° | 51.0 | 7.2 |
| 30°-40° | 14.7 | 2.1 |
| 40°-50° | 4.5 | 0.6 |
| 50°-60° | 1.3 | 0.2 |
| 60°-70° | 0.6 | 0.1 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 682.9 | 97.0 |
| 0°-40° | 697.5 | 99.1 |
| 0°-60° | 703.4 | 99.9 |
| 0°-90° | 704.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 704.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 6733 | |
| 5° | 5376 | 408 |
| 15° | 705 | 224 |
| 25° | 102 | 51 |
| 35° | 22 | 15 |
| 45° | 5 | 5 |
| 55° | 1 | 1 |
| 65° | 1 | 1 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P264300

CATALOG NUMBER: LD2B10D010 EU2B1010SP159030 2LBSQC*MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 6733.2 |
| 1° | 6649.4 |
| 2° | 6475.3 |
| 3° | 6205.1 |
| 4° | 5833.8 |
| 5° | 5376.4 |
| 6° | 4815.8 |
| 7° | 4189.5 |
| 8° | 3535.7 |
| 9° | 2902.8 |
| 10° | 2319.8 |
| 11° | 1826.3 |
| 12° | 1437.7 |
| 13° | 1131.4 |
| 14° | 893.7 |
| 15° | 705.1 |
| 16° | 556.3 |
| 17° | 442.9 |
| 18° | 356.2 |
| 19° | 289.7 |
| 20° | 239.1 |
| 22.5° | 154.6 |
| 25° | 101.9 |
| 26° | 86.0 |
| 27° | 73.0 |
| 28° | 61.4 |
| 29° | 51.3 |
| 30° | 44.1 |
| 32.5° | 30.3 |
| 35° | 21.7 |
| 37.5° | 15.9 |
| 40° | 11.6 |
| 42.5° | 7.9 |
| 45° | 5.1 |
| 47.5° | 3.6 |
| 50° | 2.9 |
| 52.5° | 2.2 |
| 55° | 1.4 |
| 57.5° | 0.7 |
| 60° | 0.7 |
| 62.5° | 0.7 |
| 65° | 0.7 |
| 67.5° | 0.7 |



TEST NUMBER: P264300

CATALOG NUMBER: LD2B10D010 EU2B1010SP159030 2LBSQC*MW

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







| | | |
|-------|--|-----|
| 70° | | 0.0 |
| 72.5° | | 0.0 |



(END OF REPORT)