

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224660

Luminaire Tested: **LD2B10D010 EU2B10FL409030 2LBDLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224660
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10FL409030 2LBDLC*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 765.9 lumens
Efficiency: N/A
Efficacy: 74.4 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224660

CATALOG NUMBER: LD2B10D010 EU2B10FL409030 2LBDLC*MW

Luminous Intensity Polar Plot

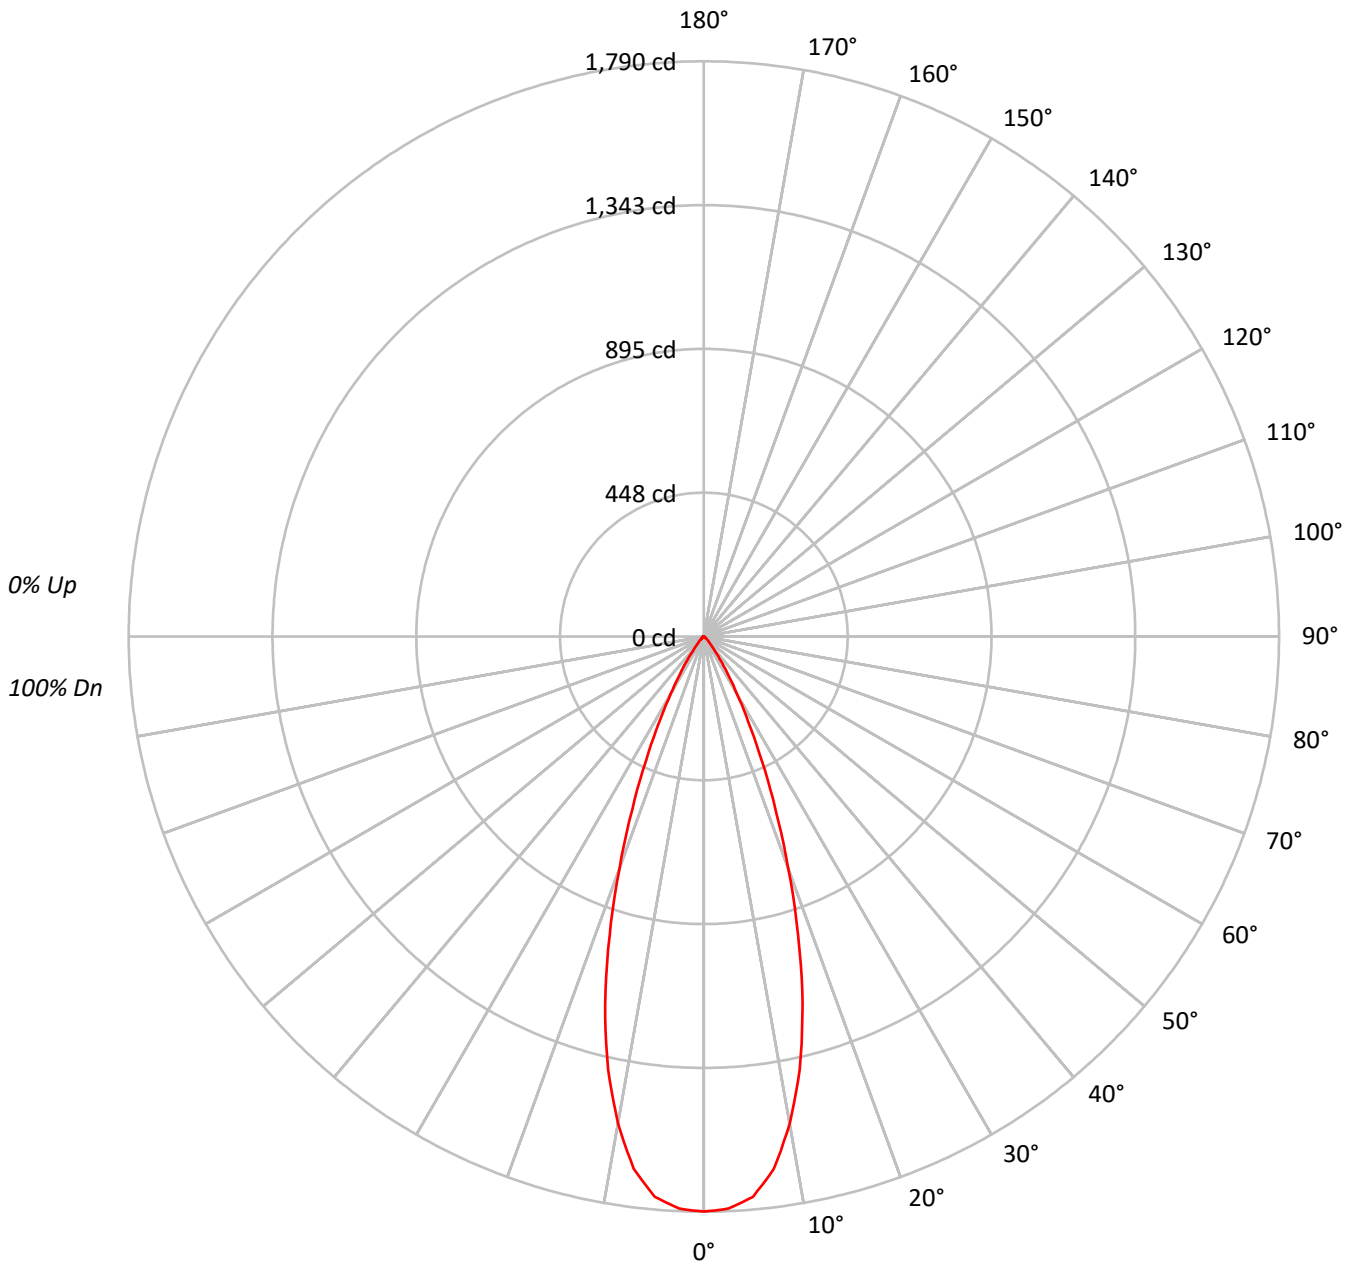



TEST NUMBER: P224660

CATALOG NUMBER: LD2B10D010 EU2B10FL409030 2LBDLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95																			
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91																			
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86																			
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82																			
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79																			
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75																			
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72																			
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69																			
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66																			
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	693272
5°	680639
10°	605086
15°	475879
20°	316656
25°	181811
30°	91824
35°	43220
40°	17394
45°	8600
50°	4761
55°	3309
60°	3021
65°	1833
70°	2265
75°	1497
80°	2231
85°	0



TEST NUMBER: P224660

CATALOG NUMBER: LD2B10D010 EU2B10FL409030 2LBDLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.3	20.9
10°-20°	321.5	42.0
20°-30°	200.0	26.1
30°-40°	61.5	8.0
40°-50°	13.5	1.8
50°-60°	4.8	0.6
60°-70°	2.4	0.3
70°-80°	1.4	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	681.8	89.0
0°-40°	743.2	97.0
0°-60°	761.6	99.4
0°-90°	765.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	765.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1790	
5°	1750	160
15°	1187	321
25°	425	200
35°	91	61
45°	16	14
55°	5	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P224660

CATALOG NUMBER: LD2B10D010 EU2B10FL409030 2LBDLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1789.8
2.5°	1782.0
5°	1750.5
7.5°	1671.0
10°	1538.4
12.5°	1379.2
15°	1186.7
17.5°	976.5
20°	768.2
22.5°	582.5
25°	425.4
27.5°	299.6
30°	205.3
32.5°	138.5
35°	91.4
37.5°	55.0
40°	34.4
42.5°	23.6
45°	15.7
47.5°	10.8
50°	7.9
52.5°	6.9
55°	4.9
57.5°	3.9
60°	3.9
62.5°	2.9
65°	2.0
67.5°	2.0
70°	2.0
72.5°	2.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)