

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P265234

Luminaire Tested: **LD2B10D010 EU2B1010SP159730 2LBLC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P265234  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B1010SP159730 2LBLC\*MMS  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 686.0 lumens  
Efficiency: N/A  
Efficacy: 66.6 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P265234

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBLC\*MMS

### Luminous Intensity Polar Plot

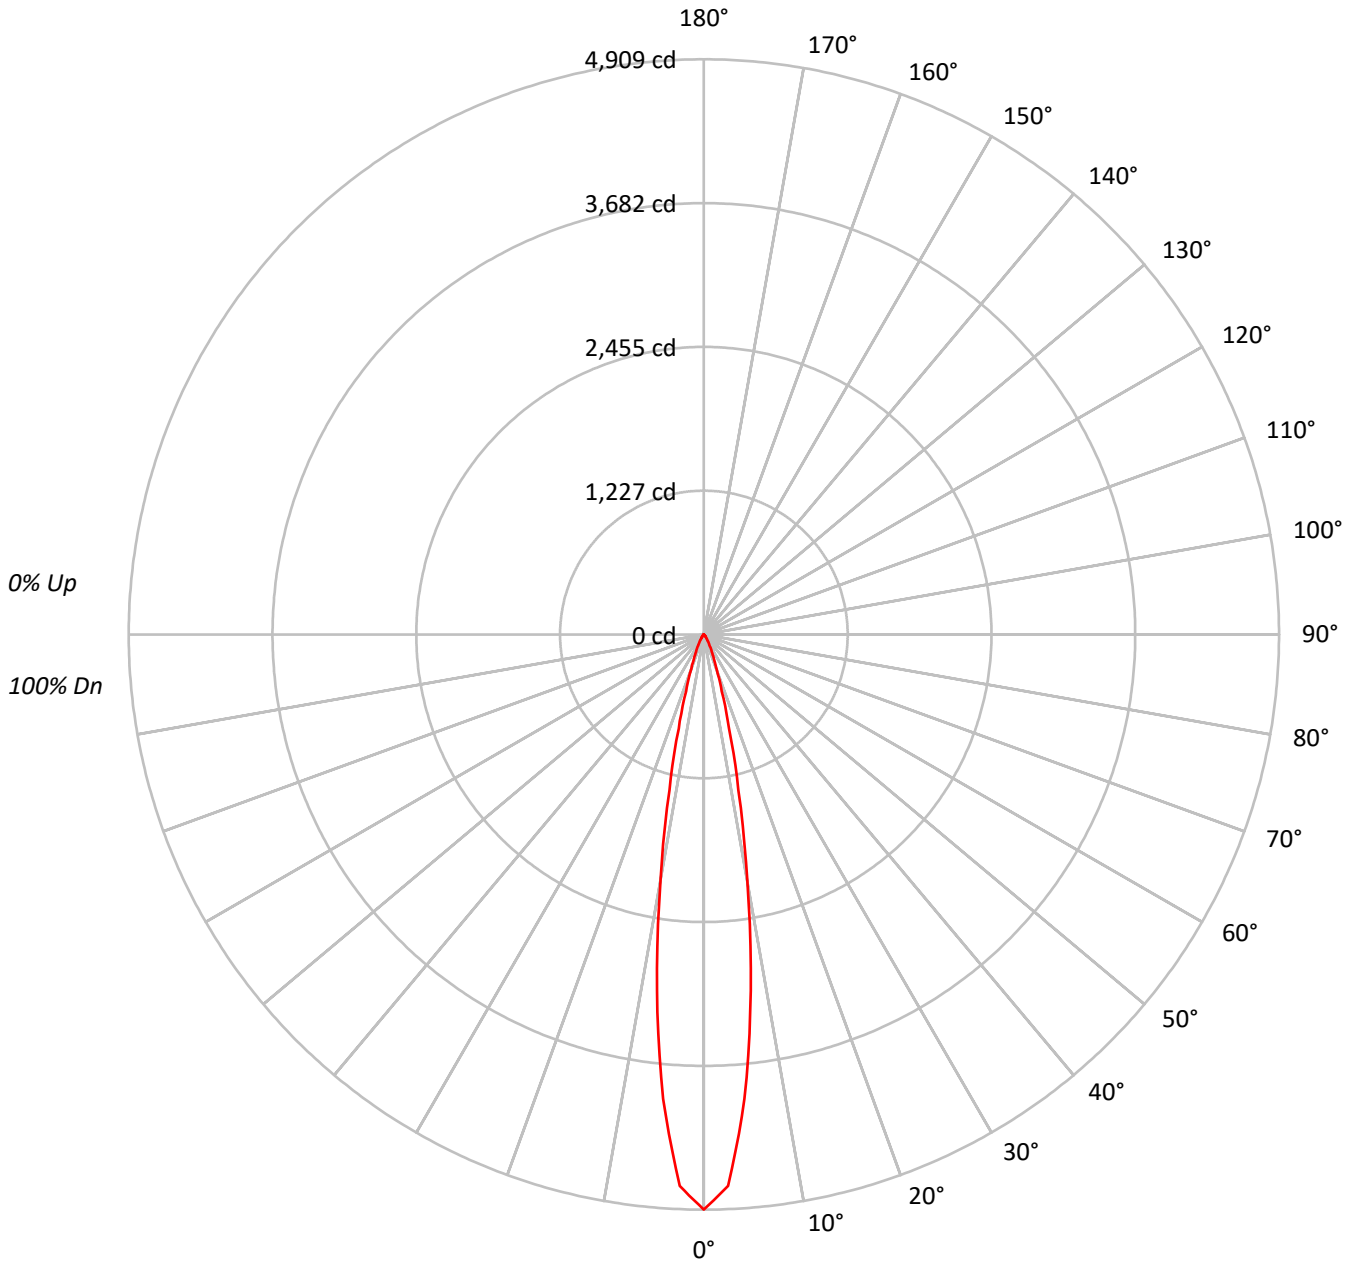



TEST NUMBER: P265234

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBLC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	106	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78	78	78	78

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2421716
5°	1971031
10°	1064717
15°	424548
20°	170213
25°	81491
30°	42271
35°	22345
40°	12366
45°	7675
50°	5296
55°	3527
60°	2664
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P265234

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBLC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	320.1	46.7
10°-20°	252.5	36.8
20°-30°	74.5	10.9
30°-40°	24.8	3.6
40°-50°	9.3	1.4
50°-60°	4.1	0.6
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	647.1	94.3
0°-40°	671.9	97.9
0°-60°	685.3	99.9
0°-90°	686.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	686.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4909	
5°	3980	320
15°	831	253
25°	150	74
35°	37	25
45°	11	9
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P265234

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBLC\*MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4908.6
2.5°	4710.8
5°	3979.9
7.5°	3066.3
10°	2125.3
12.5°	1360.1
15°	831.2
17.5°	506.9
20°	324.2
22.5°	217.1
25°	149.7
27.5°	105.8
30°	74.2
32.5°	52.2
35°	37.1
37.5°	26.1
40°	19.2
42.5°	15.1
45°	11.0
47.5°	9.6
50°	6.9
52.5°	5.5
55°	4.1
57.5°	4.1
60°	2.7
62.5°	1.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)