

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264560

Luminaire Tested: **LD2B10D010 EU2B1010SP159730 2LBSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264560
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B1010SP159730 2LBSQC*MW
Description: 1000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 646.0 lumens
Efficiency: N/A
Efficacy: 62.7 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264560

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBSQC*MW

Luminous Intensity Polar Plot

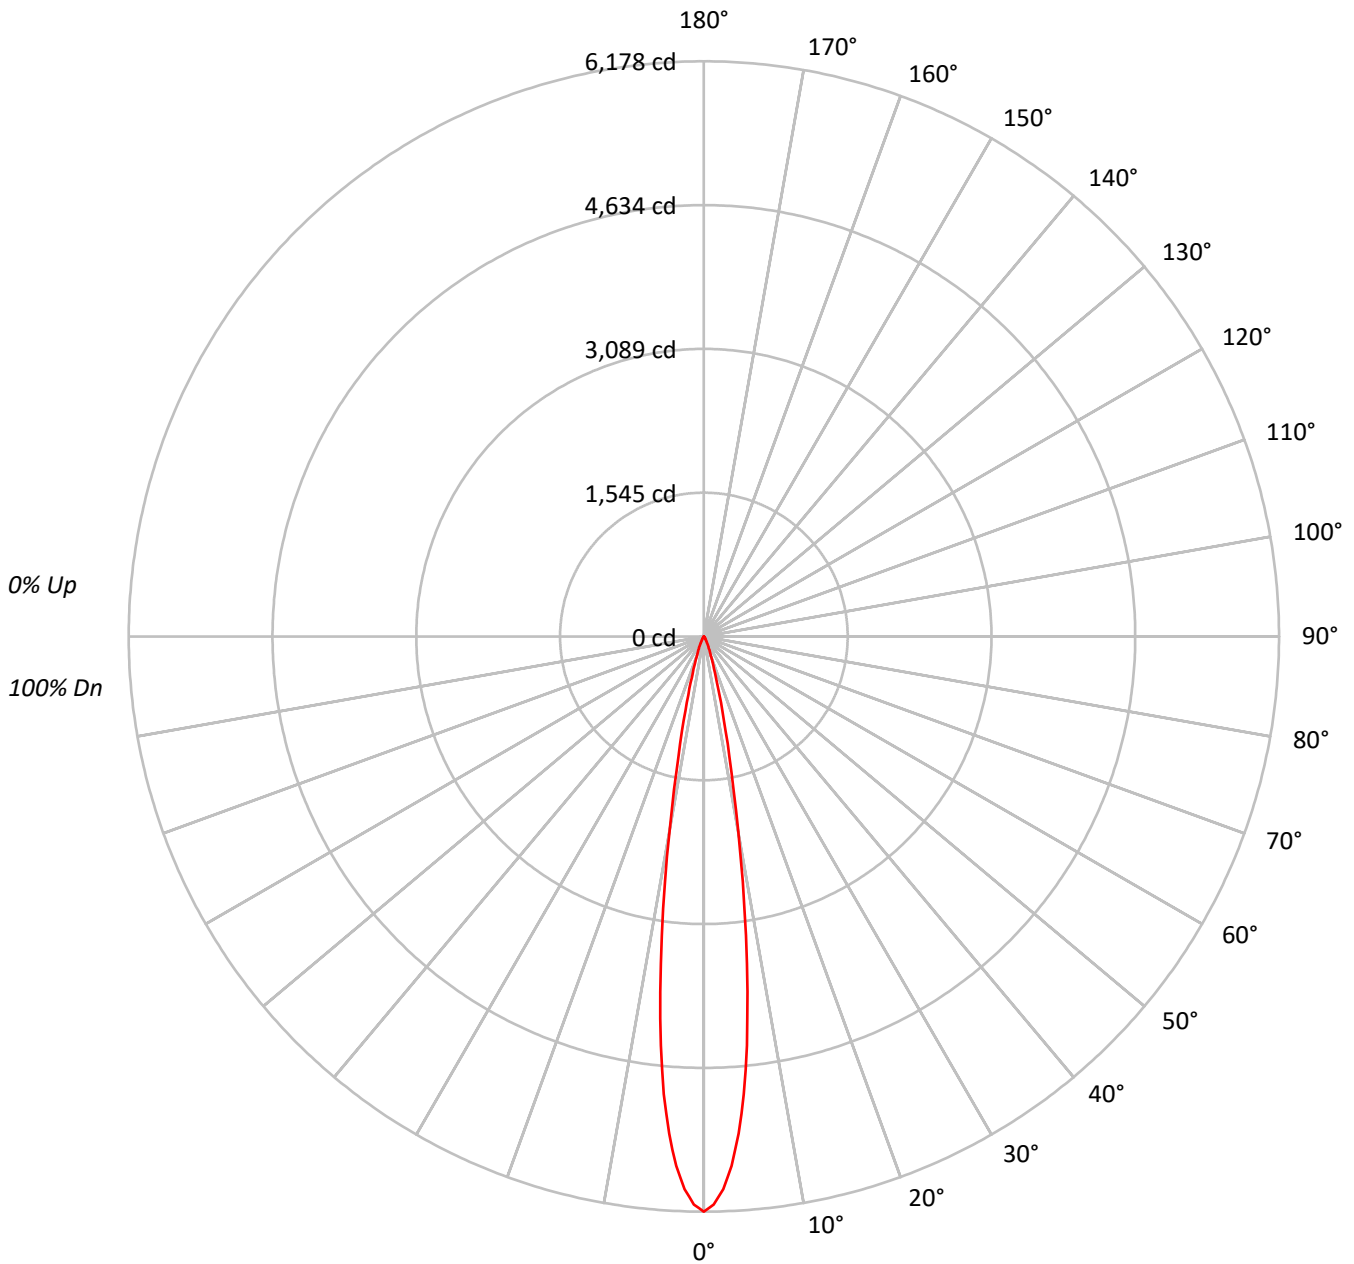



TEST NUMBER: P264560

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98				98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96				96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94				94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92				92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90				90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89				89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87				87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86				86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85				85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83				83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3048236
5°	2443298
10°	1066421
15°	330465
20°	115190
25°	50898
30°	23015
35°	11985
40°	6827
45°	3210
50°	2072
55°	1118
60°	691
65°	817
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264560

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	374.6	58.0
10°-20°	205.2	31.8
20°-30°	46.8	7.2
30°-40°	13.4	2.1
40°-50°	4.1	0.6
50°-60°	1.3	0.2
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	626.6	97.0
0°-40°	640.0	99.1
0°-60°	645.4	99.9
0°-90°	646.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	646.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6178	
5°	4934	375
15°	647	205
25°	94	47
35°	20	13
45°	5	4
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264560

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6178.5
1°	6101.6
2°	5941.8
3°	5693.9
4°	5353.1
5°	4933.5
6°	4419.1
7°	3844.3
8°	3244.4
9°	2663.6
10°	2128.7
11°	1675.9
12°	1319.2
13°	1038.1
14°	820.0
15°	647.0
16°	510.5
17°	406.4
18°	326.8
19°	265.8
20°	219.4
22.5°	141.9
25°	93.5
26°	78.9
27°	67.0
28°	56.3
29°	47.1
30°	40.4
32.5°	27.8
35°	19.9
37.5°	14.6
40°	10.6
42.5°	7.3
45°	4.6
47.5°	3.3
50°	2.7
52.5°	2.0
55°	1.3
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.7



TEST NUMBER: P264560

CATALOG NUMBER: LD2B10D010 EU2B1010SP159730 2LBSQC*MW

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)