

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224283

Luminaire Tested: **LD2B10D010 EU2B10FL409730 2LBDSQLC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P224283  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B10FL409730 2LBDSQLC\*MW  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
FLOOD OPTIC  
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 669.8 lumens  
Efficiency: N/A  
Efficacy: 65.0 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P224283

CATALOG NUMBER: LD2B10D010 EU2B10FL409730 2LBDSQLC\*MW

### Luminous Intensity Polar Plot

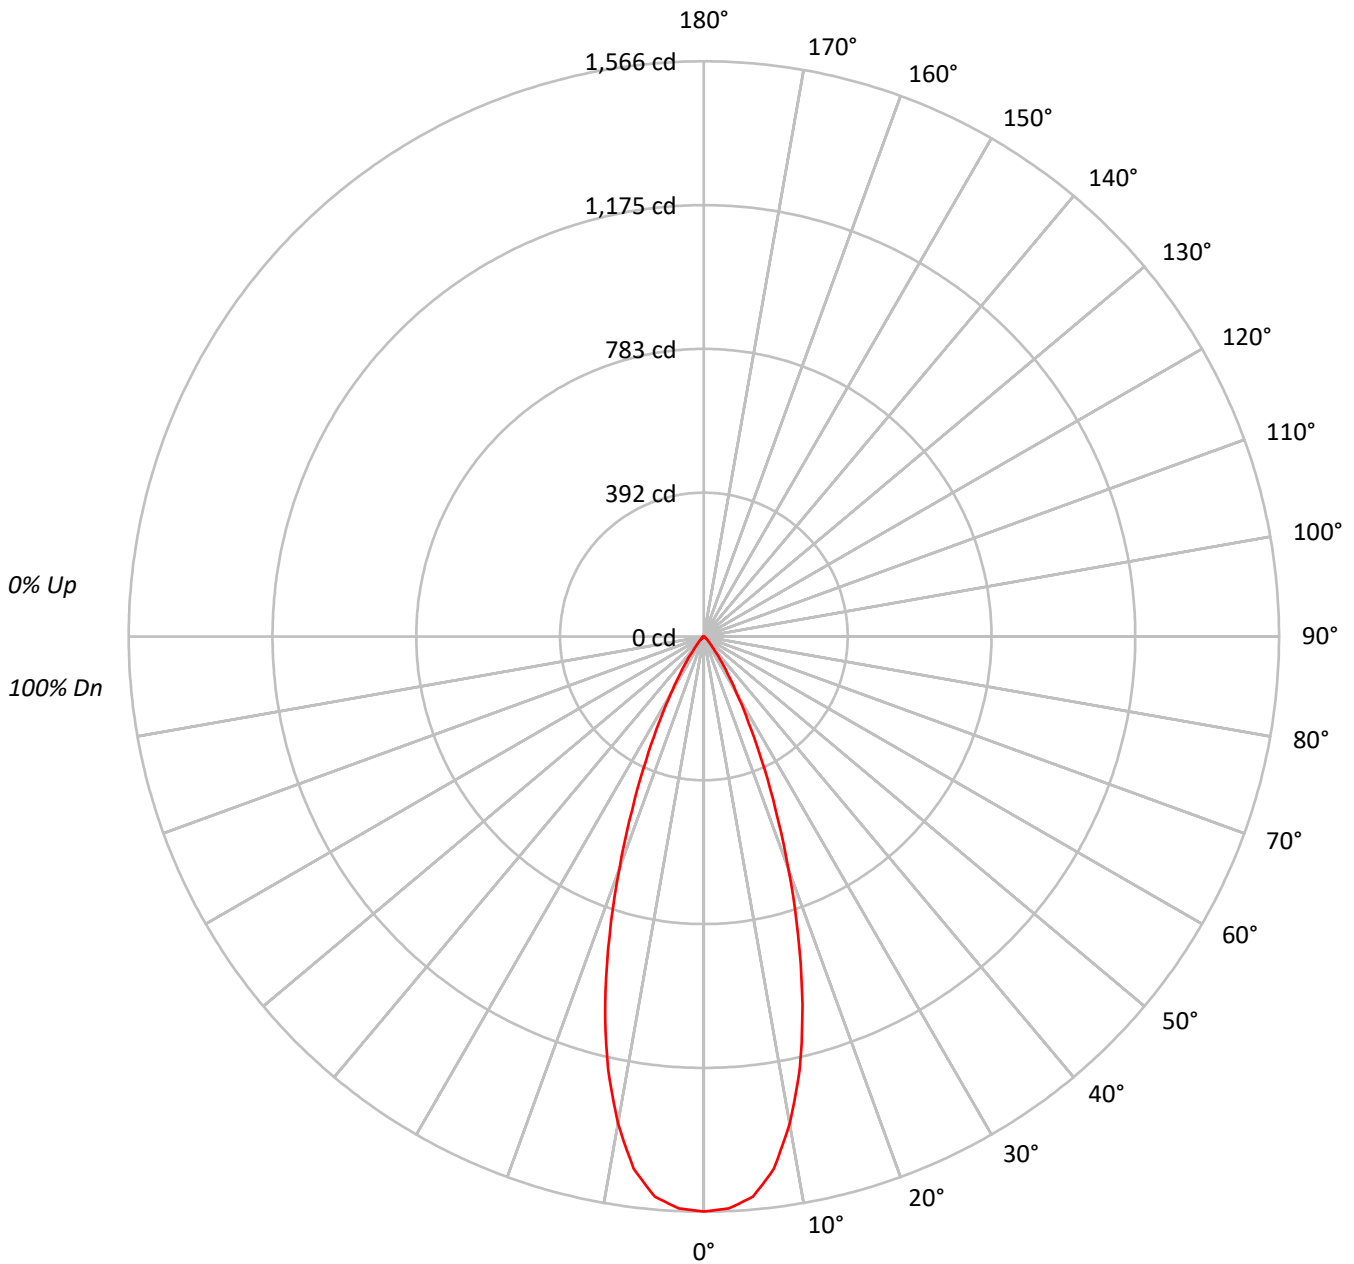



TEST NUMBER: P224283

CATALOG NUMBER: LD2B10D010 EU2B10FL409730 2LBDSQLC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91			91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86			86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82			82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79			79
6	94	86	82	78	93	86	81	78	84	80	77	83	79	77	82	79	76	75			75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72			72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69			69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66			66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64			64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	606390
5°	595331
10°	529214
15°	416208
20°	276961
25°	158989
30°	80329
35°	37782
40°	15220
45°	7505
50°	4158
55°	2904
60°	2634
65°	1558
70°	1925
75°	1347
80°	2008
85°	0



TEST NUMBER: P224283

CATALOG NUMBER: LD2B10D010 EU2B10FL409730 2LBDSQLC\*MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	140.2	20.9
10°-20°	281.1	42.0
20°-30°	174.9	26.1
30°-40°	53.8	8.0
40°-50°	11.8	1.8
50°-60°	4.2	0.6
60°-70°	2.1	0.3
70°-80°	1.3	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	596.3	89.0
0°-40°	650.1	97.1
0°-60°	666.1	99.4
0°-90°	669.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	669.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1566	
5°	1531	140
15°	1038	281
25°	372	175
35°	80	54
45°	14	12
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P224283

CATALOG NUMBER: LD2B10D010 EU2B10FL409730 2LBDSQLC\*MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1565.5
2.5°	1558.6
5°	1531.1
7.5°	1461.5
10°	1345.5
12.5°	1206.3
15°	1037.9
17.5°	854.0
20°	671.9
22.5°	509.5
25°	372.0
27.5°	262.1
30°	179.6
32.5°	121.1
35°	79.9
37.5°	48.1
40°	30.1
42.5°	20.6
45°	13.7
47.5°	9.5
50°	6.9
52.5°	6.0
55°	4.3
57.5°	3.4
60°	3.4
62.5°	2.6
65°	1.7
67.5°	1.7
70°	1.7
72.5°	1.7
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)