

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P223596

Luminaire Tested: **LD2B10D010 EU2B10SP159730 2LBDLC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P223596  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA ( 150)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B10D010 EU2B10SP159730 2LBDLC\*MMS  
Description: 1000 Lumen, 2inch Portfolio LED Downlight  
SPOT OPTIC  
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 376.2 lumens  
Efficiency: N/A  
Efficacy: 36.5 lumens/watt  
Spacing Criteria (0/90/45): 0.24 / 0.24 / 0.23  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P223596

CATALOG NUMBER: LD2B10D010 EU2B10SP159730 2LBDLC\*MMS

### Luminous Intensity Polar Plot

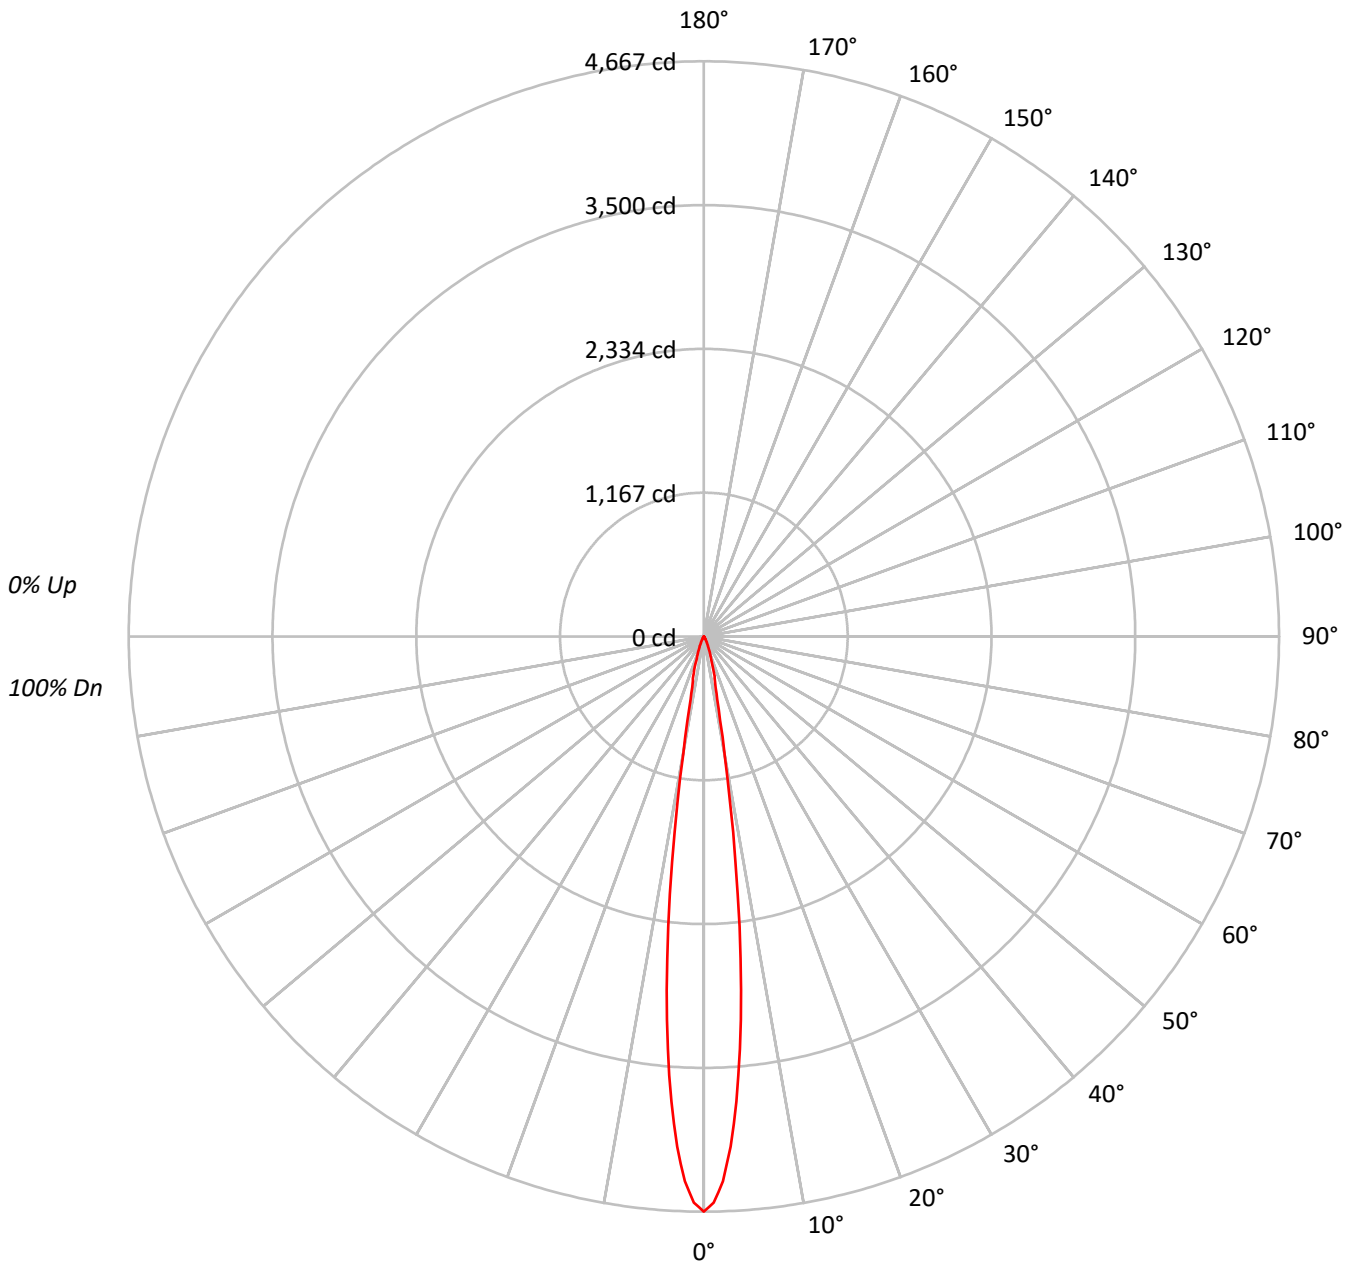



TEST NUMBER: P223596

CATALOG NUMBER: LD2B10D010 EU2B10SP159730 2LBDLC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98				98
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96				96
3	110	106	103	101	108	105	102	100	102	100	98	100	98	97	98	97	96	94				94
4	108	103	100	97	106	102	99	97	100	98	96	98	96	95	97	95	94	93				93
5	105	101	97	95	104	100	97	94	98	96	94	97	95	93	95	94	92	91				91
6	103	98	95	93	102	98	95	92	96	94	92	95	93	91	94	92	91	90				90
7	101	96	93	91	100	96	93	90	95	92	90	94	91	90	93	91	89	88				88
8	100	94	91	89	99	94	91	89	93	90	89	92	90	88	92	89	88	87				87
9	98	93	90	88	97	92	89	87	92	89	87	91	89	87	90	88	87	86				86
10	96	91	88	86	96	91	88	86	90	88	86	90	87	86	89	87	86	85				85

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1807705
5°	1306804
10°	380460
15°	133496
20°	57132
25°	25729
30°	9929
35°	4965
40°	3287
45°	2136
50°	1205
55°	878
60°	542
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P223596

CATALOG NUMBER: LD2B10D010 EU2B10SP159730 2LBDLC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	237.8	63.2
10°-20°	96.7	25.7
20°-30°	29.7	7.9
30°-40°	7.3	1.9
40°-50°	3.0	0.8
50°-60°	1.3	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	364.3	96.8
0°-40°	371.6	98.8
0°-60°	376.0	99.9
0°-90°	376.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	376.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4667	
5°	3361	238
15°	333	97
25°	60	30
35°	10	7
45°	4	3
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P223596

CATALOG NUMBER: LD2B10D010 EU2B10SP159730 2LBDLC\*MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4666.9
1°	4595.6
2°	4421.7
3°	4144.4
4°	3782.1
5°	3360.9
6°	2886.1
7°	2370.7
8°	1848.2
9°	1359.7
10°	967.3
11°	693.2
12°	521.2
13°	424.4
14°	371.5
15°	332.9
17.5°	205.4
20°	138.6
22.5°	92.9
25°	60.2
27.5°	36.6
30°	22.2
32.5°	14.4
35°	10.5
37.5°	8.5
40°	6.5
42.5°	5.2
45°	3.9
47.5°	2.6
50°	2.0
52.5°	2.0
55°	1.3
57.5°	1.3
60°	0.7
62.5°	0.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P223596

CATALOG NUMBER: LD2B10D010 EU2B10SP159730 2LBDLC\*MMS

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)