

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B10D010 EU2B10WFL559730 2LBDLC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14809)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10WFL559730 2LBDLC*MB
Description: 1000 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 632.4 lumens
Efficiency: N/A
Efficacy: 61.4 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559730 2LBDLC*MB

Luminous Intensity Polar Plot

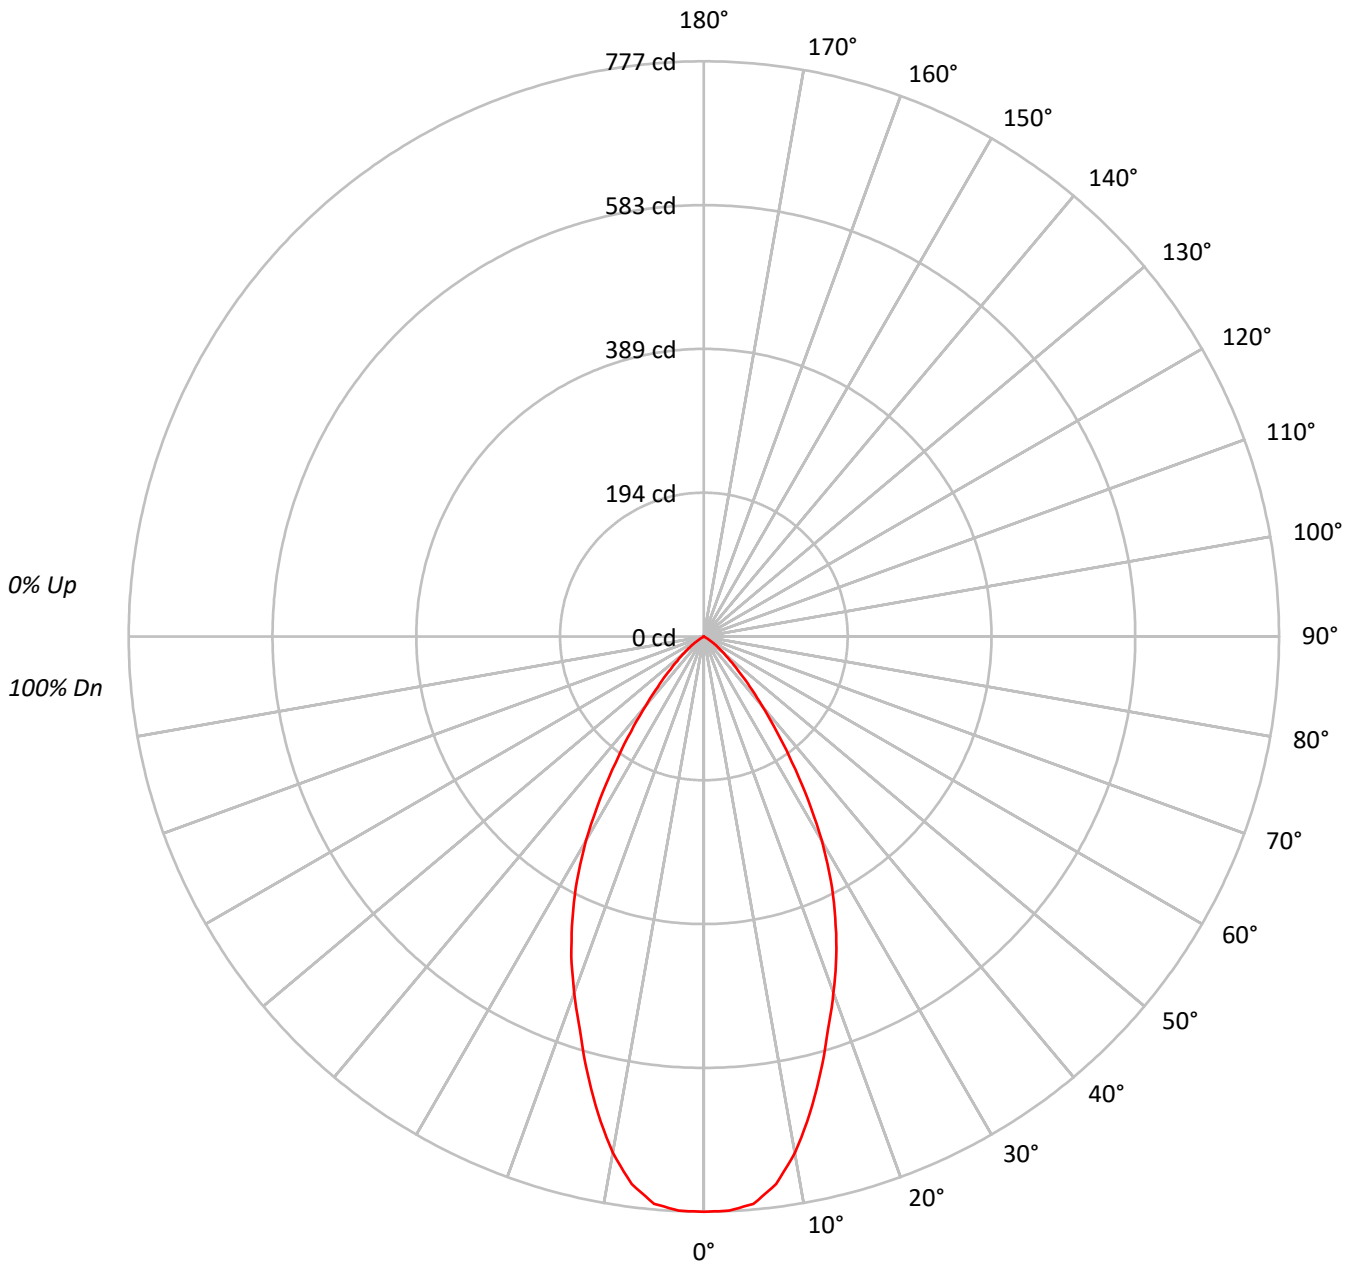



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559730 2LBDLC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	63	70	66	62	69	65	62	60			
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	71	62	56	52	70	61	56	52	60	55	52	60	55	52	59	55	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	301045
5°	299124
10°	278590
15°	244295
20°	211049
25°	179503
30°	142366
35°	98261
40°	61689
45°	36811
50°	21332
55°	10738
60°	697
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559730 2LBDLC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.4	11.3
10°-20°	169.8	26.9
20°-30°	191.1	30.2
30°-40°	131.3	20.8
40°-50°	54.6	8.6
50°-60°	14.1	2.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	432.4	68.4
0°-40°	563.7	89.1
0°-60°	632.3	100.0
0°-90°	632.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	632.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	777	
5°	769	71
15°	609	170
25°	420	191
35°	208	131
45°	67	55
55°	16	14
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B10D010 EU2B10WFL559730 2LBDLC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	777.2
2.5°	776.3
5°	769.3
7.5°	746.3
10°	708.3
12.5°	660.5
15°	609.2
17.5°	557.1
20°	512.0
22.5°	467.8
25°	420.0
27.5°	371.4
30°	318.3
32.5°	261.7
35°	207.8
37.5°	161.8
40°	122.0
42.5°	92.0
45°	67.2
47.5°	48.6
50°	35.4
52.5°	24.8
55°	15.9
57.5°	5.3
60°	0.9
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)