

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225129

Luminaire Tested: **LD2B10D010 EU2B10FL408035 2LBD*GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225129
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B10D010 EU2B10FL408035 2LBD*GPH
Description: 1000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SPUN ROUND TRIM WITH GRAPHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1046.0 lumens
Efficiency: N/A
Efficacy: 101.6 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225129

CATALOG NUMBER: LD2B10D010 EU2B10FL408035 2LBD*GPH

Luminous Intensity Polar Plot

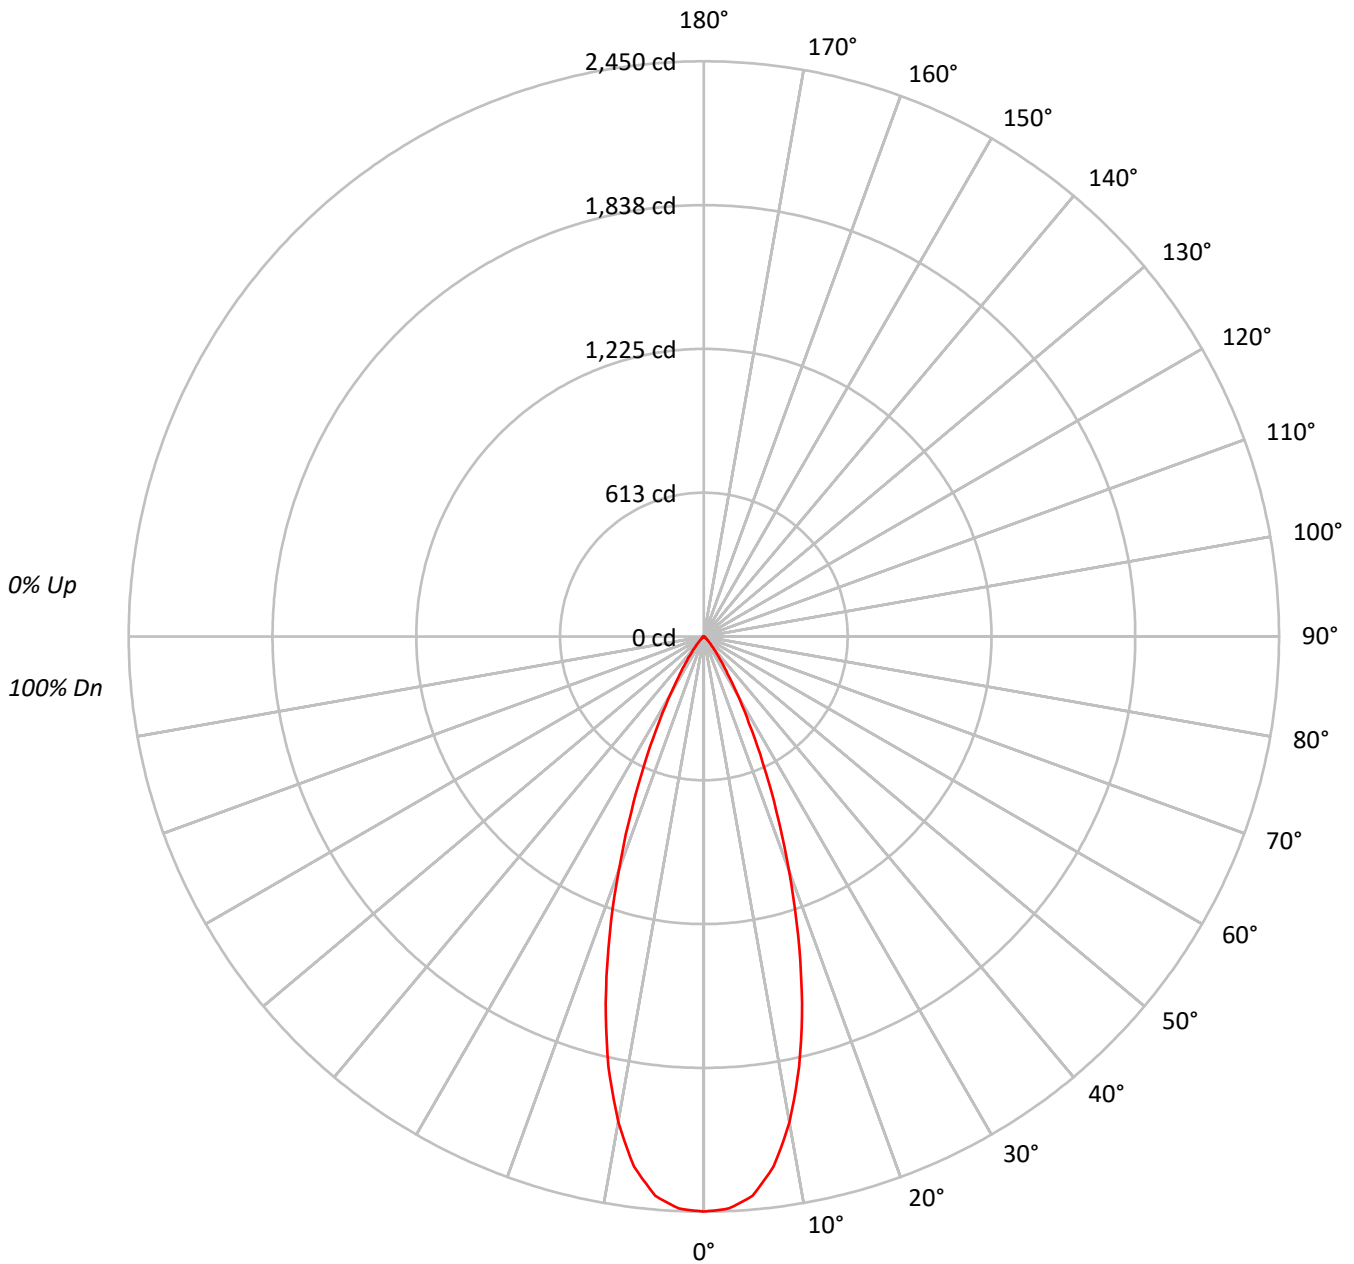



TEST NUMBER: P225129

CATALOG NUMBER: LD2B10D010 EU2B10FL408035 2LBD*GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	99	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	94	92	89	92	90	88	87	87	87	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83	83	83	83
5	98	91	86	83	96	90	85	82	88	84	81	87	83	81	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	85	81	78	83	80	77	82	79	77	75	75	75	75
7	91	83	78	75	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72
8	87	80	75	71	86	79	74	71	78	74	71	77	73	71	76	73	70	69	69	69	69
9	84	76	72	68	83	76	71	68	75	71	68	74	70	68	73	70	68	66	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	948881
5°	929721
10°	826093
15°	648153
20°	435907
25°	253613
30°	127024
35°	59297
40°	27659
45°	11668
50°	5604
55°	3579
60°	2092
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225129

CATALOG NUMBER: LD2B10D010 EU2B10FL408035 2LBD*GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	218.9	20.9
10°-20°	438.7	41.9
20°-30°	277.4	26.5
30°-40°	86.3	8.3
40°-50°	19.2	1.8
50°-60°	4.9	0.5
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	935.0	89.4
0°-40°	1021.3	97.6
0°-60°	1045.3	99.9
0°-90°	1046.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1046.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2450	
5°	2391	219
15°	1616	439
25°	593	277
35°	125	86
45°	21	19
55°	5	5
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225129

CATALOG NUMBER: LD2B10D010 EU2B10FL408035 2LBD*GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2449.7
2.5°	2439.1
5°	2391.1
7.5°	2277.7
10°	2100.3
12.5°	1876.3
15°	1616.3
17.5°	1334.9
20°	1057.5
22.5°	808.1
25°	593.4
27.5°	416.1
30°	284.0
32.5°	188.0
35°	125.4
37.5°	84.0
40°	54.7
42.5°	33.3
45°	21.3
47.5°	14.7
50°	9.3
52.5°	6.7
55°	5.3
57.5°	4.0
60°	2.7
62.5°	1.3
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)